


12. Rear Washer

A: REMOVAL

- 1) Detach the roof spoiler. <Ref. to EI-31, REMOV-AL, Roof Spoiler.>
- 2) Remove the washer hose from washer nozzle.
- 3) Push the claw of the nozzle from the reverse side of roof spoiler with a flat tip screwdriver or equivalent, and remove the washer nozzle.

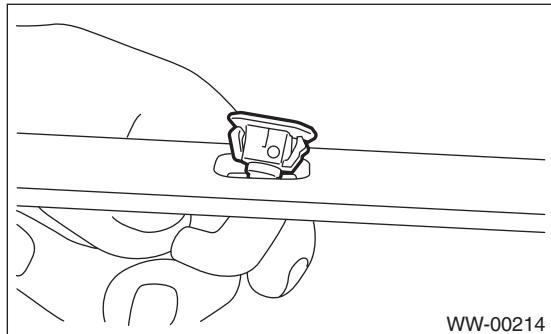

B: INSTALLATION


Install in the reverse order of removal.

C: INSPECTION

- Make sure the nozzle and hose are not clogged.
- Make sure the hose is not bent.
- While the vehicle is at a standstill, make sure that the washer injection position is as shown in the figure.

NOTE:

Washer injection position can not be adjusted.

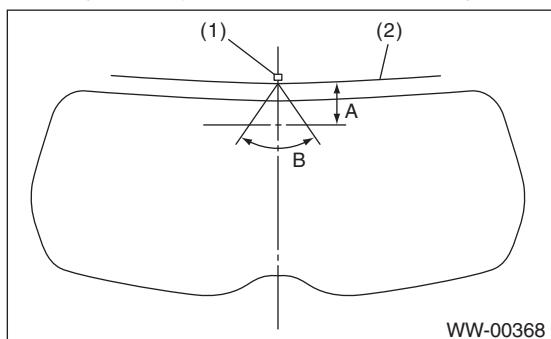

- (1) Nozzle
- (2) Upper edge of the rear gate glass
- (A) 72 mm (2.83 in)
- (B) 70°

ENTERTAINMENT

ET

	Page
1. General Description	2
2. Audio System	3
3. Front Accessory Power Supply Socket System	4
4. Rear Accessory Power Supply Socket System	5
5. Navigation System	6
6. Rearview Camera System	7
7. Multi-function Display (MFD) System	8
8. Rear Entertainment System	9
9. Control Panel	10
10. Audio	14
11. Front Speaker	15
12. Tweeter	16
13. Rear Speaker	17
14. Woofer	18
15. Antenna	19
16. Antenna Amplifier	20
17. Noise Suppressor	21
18. Navigation Display	22
19. Navigation Body	23
20. Navigation Switch	24
21. GPS Antenna	25
22. Rearview Camera	26
23. Rearview Camera Control Unit	27
24. Multi-function Display (MFD)	28
25. Multi-function Switch	29
26. Rear Entertainment	30
27. AUX Input Terminal	31
28. Front Accessory Power Supply Socket	32
29. Rear Accessory Power Supply Socket	33
30. Steering Satellite Switch	34