Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU HELP

Engine and cooling system

		525e (E28) 1983 to 1988
Type		M20/B27
Capacity (cm³) / number of cylinders		2693 / 6
Compression ratio / pressure	bar	11.0[1] / 10 to 11
Oil pressure	bar	0.5 to 2.0
Oil temperature	ºC	_
Valve clearance - inlet	mm	0.30 H
Valve clearance - exhaust	mm	0.30 H
Firing order		1-5-3-6-2-4
No 1 cylinder position		TBE
Thermostat opening temperature	ºC	80
Radiator cap pressure	bar	1.0±0.1

Fuel system

		525e (E28) 1983 to 1988
Idle speed - manual [auto]	rpm	700±50
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	1.0±0.5
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO2 @ idle speed [3000 rpm] - see page VI	%	_
O2 @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Bosch
Type / ref		DME-Motronic
Main jet / needle		_
Injection pressure	bar	2.5
Pump pressure	bar	2.5 to 3.0
Octane rating	RON	98[R]

Ignition system

		525e (E28) 1983 to 1988
Type		DME Motronic
Ignition coil		Bosch 0 221 122 319
Primary resistance	ohms	0.82
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	≥10.8
Distributor		Bosch
Points gap (air gap)	mm	[0.30 to 0.70]
Dwell angle	º (%)	_
Condenser capacity	µF	_
Rotation		Clockwise
Ignition timing - basic [static	º Crankshaft @ rpm	9±3 BTDC @ 700±50
V = Vacuum NV = No Vacuum		NV
Total ignition advance	º Crankshaft @ rpm	Computer control
	º Crankshaft @ rpm	_
	º Crankshaft @ rpm	_
Centrifugal check.	º Crankshaft @ rpm	Computer control
	º Crankshaft @ rpm	_
	º Crankshaft @ rpm	_
Vacuum range check	mbar	Computer control
Maximum vacuum advance	º Crankshaft	_
Spark plugs		Bosch/Champion
Type		W8DC / N9YCX
Electrode gap	mm	0.70+0.10

Electrical system

		525e (E28) 1983 to 1988
Battery	V / CC / RC	12 / 66Ah
Alternator voltage / full load current / engine rpm		13.5 to 14.2 / _ / 1500
Starter motor current / voltage - cranking	A / V	170 / 9.0
- locked	A / V	_

Running gear

		525e (E28) 1983 to 1988
Brakes -		
Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	2.0
Tyres		
Saloon	Size	175x14: 195/70x14
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	2.0 / 2.0
- Estate / Van	bar	_
Front suspension / wheel alignment		
Toe-in (+) / Toe-out (–)	mm [º]	+2.0±0.6
Camber		-20'±30'
Castor		+8°±30' (10° lock)
King pin inclination		+11°57'±30' (10° lock)
Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (–)	mm [º]	+2.0±0.8
Camber		WSM

Torque wrench settings

		525e (E28) 1983 to 1988
Cylinder head - stage 1	Nm	TORX: 30 to 32 WSM
- stage 2	Nm	+ 90±3°
Cylinder head - stage 3	Nm	+ 90±3°
- stage 4	Nm	_
Big-end bearings	Nm	20 + 70°
Main bearings	Nm	58 to 63
Clutch cover	Nm	24. 10.9 hex: 35
Flywheel [driveplate]	Nm	105±7 locked threads
Front hubs	Nm	WSM
Rear hubs	Nm	175 to 210
Wheel nuts / bolts	Nm	100±10
Spark plugs	Nm	26±2

Capacities

		525e (E28) 1983 to 1988
Engine oil & filter	litres	4.3
Gearbox - 4-speed [5-speed]	litres	1.3
Automatic transmission - refill	litres	3.0
Final drive	litres	1.7
Cooling system	litres	11.0
Fuel tank	litres	70

Notes and Illustrations

[1]**86 ▶: 10.2:1**

1: Idle speed 2: CO / Mixture

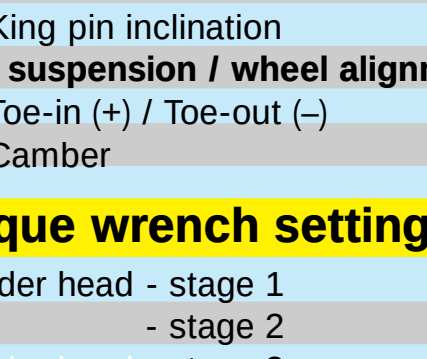

2693 cm³, M20

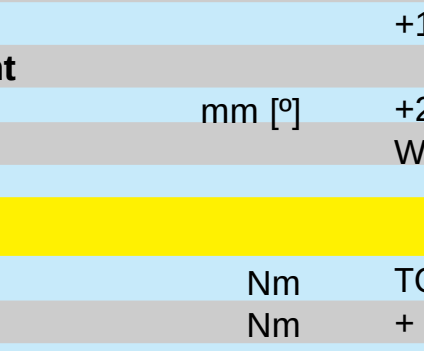

Motronic, 2693 cm³

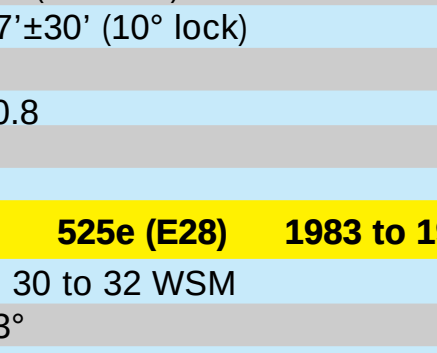

Motronic, 2693 cm³