

Engine & Cooling

Fuel

Ignition

Electrical

Running gear

Torque settings

Capacities

Notes & Illustrations



Automotive Technical
DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling systemAX GT & Sportif1990 to 1992

Type		TU3S (K2A) 63.5kW
Capacity (cm³) / number of cylinders		1360 / 4
Compression ratio / pressure	bar	9.3 / _
Oil pressure	bar	[4.0]
Oil temperature	°C	90
Valve clearance - inlet	mm	0.20±0.05
Valve clearance - exhaust	mm	0.40±0.05
Firing order		1-3-4-2
No 1 cylinder position		FE
Thermostat opening temperature	°C	88
Radiator cap pressure	bar	1.0. 91 ►: 1.4

Fuel systemAX GT & Sportif1990 to 1992

Idle speed - manual [auto]	rpm	750±50
Fast idle speed - manual [auto]	rpm	1300 to 1450
CO @ idle speed [3000 rpm] - see page VI	%	_
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO2 @ idle speed [3000 rpm] - see page VI	%	≥10.0
O2 @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Solex
Type / ref		32-34 Z2 PSA 409
Main jet / needle		155, 175
Injection pressure	bar	_
Pump pressure	bar	0.25
Octane rating	RON	95[E 95 RON]

Ignition systemAX GT & Sportif1990 to 1992

Type		Electronic - Hall effect
Ignition coil		BTR 02. 91 ►: BTR 05
Primary resistance	ohms	0.8
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor		Ducellier
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation		Anticlockwise
Ignition timing - basic [static	° Crankshaft @ rpm	4±2 BTDC @ 750
V = Vacuum NV = No Vacuum		NV
Total ignition advance	° Crankshaft @ rpm	C052-D039
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	0 @ 1000 to 1400
	° Crankshaft @ rpm	12 to 16 @ 3000
	° Crankshaft @ rpm	22 to 26 @ 6400
Vacuum range check	mbar	135 to 330
Maximum vacuum advance	° Crankshaft	9 to 13
Spark plugs		Eyquem/Champion
Type		FC58LS / C7YCX
Electrode gap	mm	0.80

Electrical systemAX GT & Sportif1990 to 1992

Battery	V / CC / RC	12 / 150 / _
Alternator voltage / full load current / engine rpm		13.5 / 50 / 3650
Starter motor current / voltage - cranking	A / V	105 / 12
- locked	A / V	220 / _

Running gearAX GT & Sportif1990 to 1992

Brakes -		
Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	1.0

Tyres		
Saloon	Size	155/65x14:165/65x13
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	1.9 / 2.0
- Estate / Van	bar	_

Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	-2.0±1.5
Camber		-30'±30'
Castor		+2°15'±30'
King pin inclination		+12.58°

Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+1.8 to 5.4
Camber		-1°15'±20'

Torque wrench settingsAX GT & Sportif1990 to 1992

Cylinder head - stage 1	Nm	20
- stage 2	Nm	+ 240°
Cylinder head - stage 3	Nm	_
- stage 4	Nm	_
Big-end bearings	Nm	40
Main bearings	Nm	20 + 45°
Clutch cover	Nm	13
Flywheel [driveplate]	Nm	65 LkC
Front hubs	Nm	250
Rear hubs	Nm	140
Wheel nuts / bolts	Nm	90
Spark plugs	Nm	25


CapacitiesAX GT & Sportif1990 to 1992

Engine oil & filter	litres	3.5
Gearbox - 4-speed [5-speed]	litres	2.0
Automatic transmission - refill	litres	_
Final drive	litres	WT
Cooling system	litres	4.8
Fuel tank	litres	43


Notes and Illustrations




1: Idle speed 2: CO / Mixture

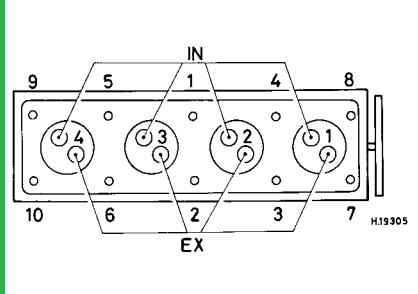

1360 cm³

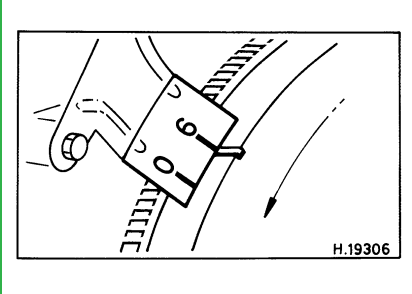

1360 cm³

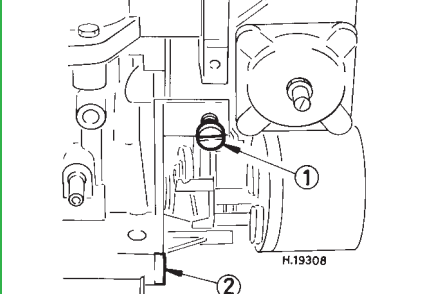

Solex Z2