

CITROËN

Visa GTi

1985 to 1988

Engine & Cooling

Fuel

Ignition

Electrical

Running gear

Torque settings

Capacities

Notes & Illustrations



Automotive Technical
DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system

Visa GTi

1985 to 1988

Type	XU5J (180A). 86 ►: JA (B6D)	
Capacity (cm ³) / number of cylinders	1580 / 4	
Compression ratio / pressure	bar	9.8 / _
Oil pressure	bar	1.4 [3.5]
Oil temperature	°C	80
Valve clearance - inlet	mm	0.15 to 0.25
Valve clearance - exhaust	mm	0.35 to 0.45
Firing order	1-3-4-2	
No 1 cylinder position	FE	
Thermostat opening temperature	°C	82 to 93
Radiator cap pressure	bar	1.0

Fuel system

Visa GTi

1985 to 1988

Idle speed - manual [auto]	rpm	850±50
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	_
HC @ idle speed [3000 rpm] - see page VI	ppm	_
CO2 @ idle speed [3000 rpm] - see page VI	%	_
O2 @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection	Bosch	
Type / ref	LE2-Jetronic	
Main jet / needle	_	
Injection pressure	bar	2.5
Pump pressure	bar	2.9 to 3.1
Octane rating	RON	97[RA] ¹

Ignition system

Visa GTi

1985 to 1988

Type	Electronic	
Ignition coil	Ducellier, Bosch	
Primary resistance	ohms	0.7 to 0.94
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor	Bosch	
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation	Clockwise	
Ignition timing - basic [static	° Crankshaft @ rpm	10 BTDC @ 900
V = Vacuum NV = No Vacuum	NV	
Total ignition advance	° Crankshaft @ rpm	C019-D013
	° Crankshaft @ rpm	30 @ 3000
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	0 to 5 @ 1400
	° Crankshaft @ rpm	18 to 22 @ 3000
	° Crankshaft @ rpm	22 to 26 @ 3500
Vacuum range check	mbar	160 to 450
Maximum vacuum advance	° Crankshaft	10 to 14
Spark plugs	Bosch/Champion	
Type	H6DC / S279YC ²	
Electrode gap	mm	0.60 to 0.70 ²

Electrical system

Visa GTi

1985 to 1988

Battery	V / CC / RC	12 / 175 / 29
Alternator voltage / full load current / engine rpm	13.5 / _ / 3640	
Starter motor current / voltage - cranking	A / V	47 / 12 (no load)
- locked	A / V	_

Running gear

Visa GTi

1985 to 1988

Brakes -		
Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	1.0

Tyres		
Saloon	Size	185/60x13
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	2.0 / 2.0
- Estate / Van	bar	_

Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+1.0±1.0
Camber	+14'±30'	
Castor	+2°22'±30'	
King pin inclination	+9°20'±40'	

Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+4.0±1.0
Camber	-1°±30'	

Torque wrench settings

Visa GTi

1985 to 1988

Cylinder head - stage 1	Nm	60
- stage 2	Nm	Slacken
Cylinder head - stage 3	Nm	20
- stage 4	Nm	+ 120°
Big-end bearings	Nm	50
Main bearings	Nm	53
Clutch cover	Nm	22
Flywheel [driveplate]	Nm	50 LkC
Front hubs	Nm	270
Rear hubs	Nm	WSM
Wheel nuts / bolts	Nm	60 to 80 ³
Spark plugs	Nm	10 to 13

Capacities

Visa GTi

1985 to 1988

Engine oil & filter	litres	5.0
Gearbox - 4-speed [5-speed]	litres	2.0
Automatic transmission - refill	litres	_
Final drive	litres	WT
Cooling system	litres	7.5
Fuel tank	litres	43

Notes and Illustrations


¹[E 95 RON]: retard ignition by 2°

²1987: XU5JA (B6D): Champion C7YC, gap 0.80


³Alloy: 75 to 85

1: Idle speed


2: CO / Mixture

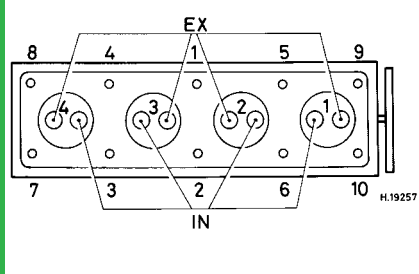


1580 cm³

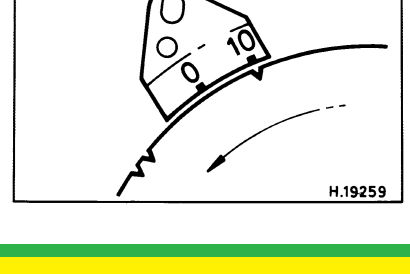

1580 cm³

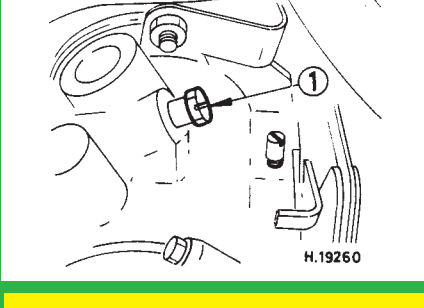

LE2-Jetronic

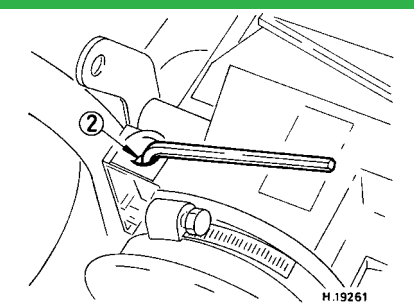

LE2-Jetronic