


Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------

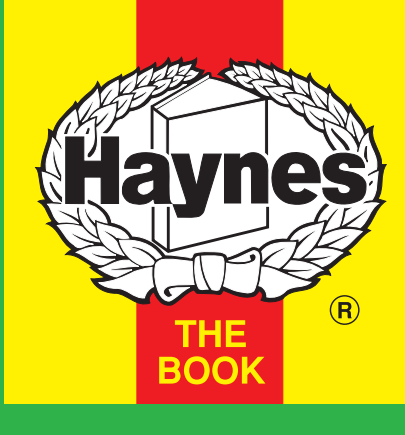

Automotive
Technical
DATA
BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system214, 414 DOHC 16V & CAT1989 to 1991

Type		1.4 K16 DOHC 16V
Capacity (cm³) / number of cylinders		1397 / 4
Compression ratio / pressure	bar	9.5 / _
Oil pressure	bar	1.0 [≤7.0]
Oil temperature	°C	80
Valve clearance - inlet	mm	0: Hyd.
Valve clearance - exhaust	mm	0: Hyd.
Firing order		1-3-4-2
No 1 cylinder position		TBE
Thermostat opening temperature	°C	82
Radiator cap pressure	bar	0.9 to 1.0

Fuel system214, 414 DOHC 16V & CAT1989 to 1991

Idle speed - manual [auto]	rpm	850±50, ECU control
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	0.5 to 2.0
HC @ idle speed [3000 rpm] - see page VI	ppm	≤200
CO2 @ idle speed [3000 rpm] - see page VI	%	_
O2 @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Rover.
Type / ref		Throttle body injection
Main jet / needle		_
Injection pressure	bar	1.0 to 1.2
Pump pressure	bar	≤2.7
Octane rating	RON	97[E 95 RON] ¹

Ignition system214, 414 DOHC 16V & CAT1989 to 1991

Type		MEMS
Ignition coil		NEC 10002 or 10003
Primary resistance	ohms	0.30 to 0.50
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor		_
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation		Anticlockwise
Ignition timing - basic [static	° Crankshaft @ rpm	13±2 BTDC @ idle ²
V = Vacuum NV = No Vacuum		V
Total ignition advance	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	_
Spark plugs		Unipart/Champion
Type		GSP6662 / RC9YCC
Electrode gap	mm	0.85±0.05

Electrical system214, 414 DOHC 16V & CAT1989 to 1991

Battery	V / CC / RC	12 / 360 / 60
Alternator voltage / full load current / engine rpm		_ / 65 / 3000
Starter motor current / voltage - cranking	A / V	_
- locked	A / V	_

Running gear214, 414 DOHC 16V & CAT1989 to 1991

Brakes -		
Front (min. friction material thickness)	mm	3.0
Rear (min. friction material thickness)	mm	2.0. Discs: 3.0

Tyres		
Saloon	Size	175/65x14: 185/60x14
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	2.1 / 2.1
- Estate / Van	bar	_

Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	[-10'±15'] U/L
Camber		-20'±10' U/L
Castor		+1°59'±30' U/L
King pin inclination		+12° U/L

Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	[+11'±7.5'] PW U/L
Camber		-50' to +50' U/L

Torque wrench settings214, 414 DOHC 16V & CAT1989 to 1991

Cylinder head - stage 1	Nm	20
- stage 2	Nm	+ 180°
Cylinder head - stage 3	Nm	+ 180°
- stage 4	Nm	_
Big-end bearings	Nm	20 + 45°
Main bearings	Nm	WSM
Clutch cover	Nm	18
Flywheel [driveplate]	Nm	85 N
Front hubs	Nm	185
Rear hubs	Nm	185
Wheel nuts / bolts	Nm	100
Spark plugs	Nm	25


Capacities214, 414 DOHC 16V & CAT1989 to 1991

Engine oil & filter	litres	4.5
Gearbox - 4-speed [5-speed]	litres	2.0
Automatic transmission - refill	litres	_
Final drive	litres	WT
Cooling system	litres	5.8
Fuel tank	litres	55

Notes and Illustrations

¹CAT: [U]

²With MNE 10011 control unit. MNE 10013 or 10051: 14±2 BTDC @ idle

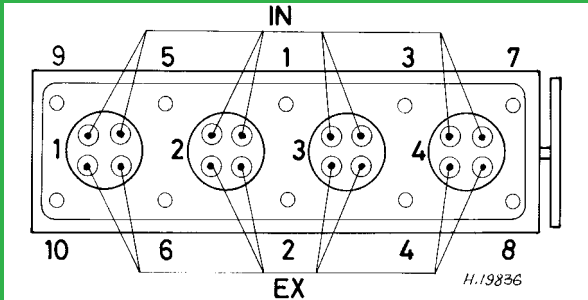

1397 cm³, 16V