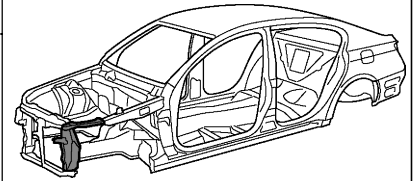
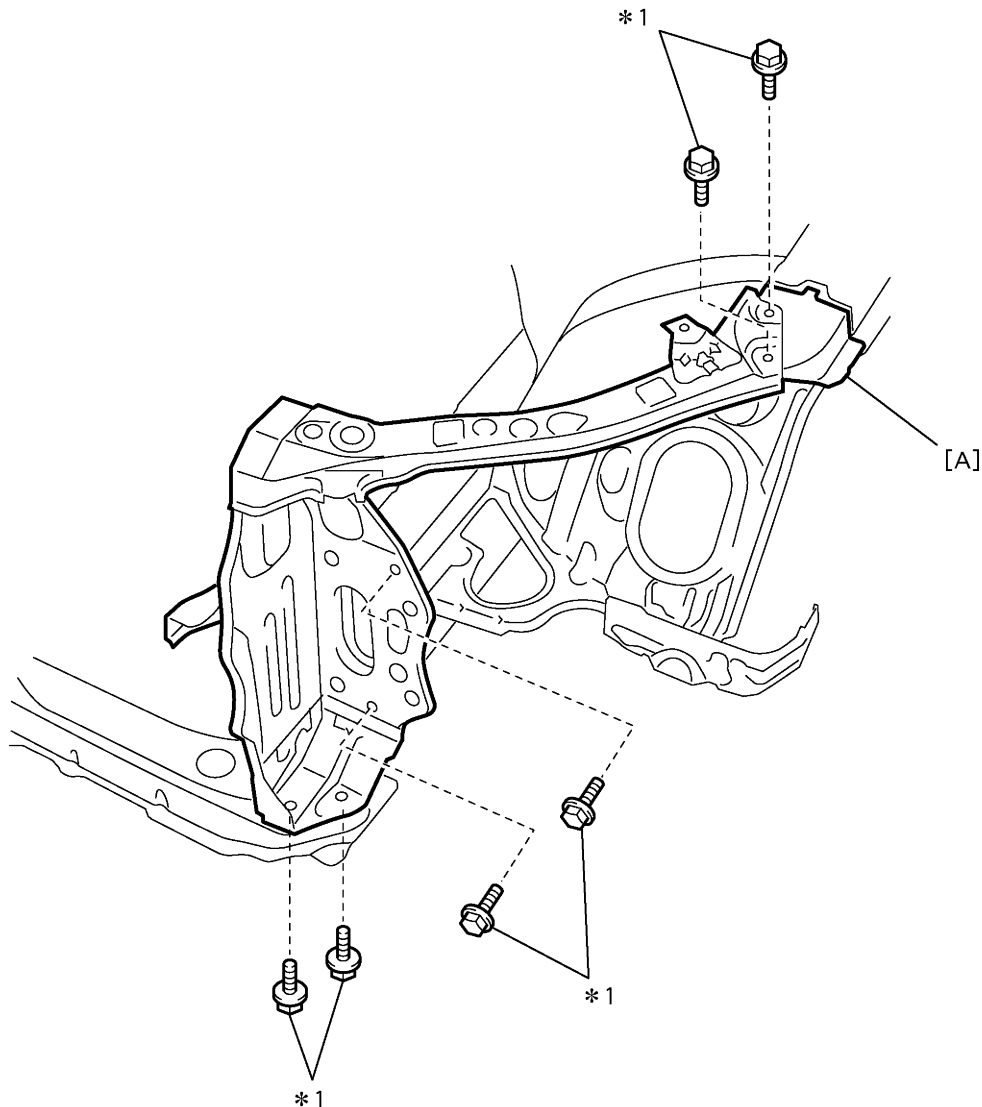


RADIATOR SUPPORT (ASSY)**REPLACEMENT**

F22213A

REMOVAL

F22213

POINT


- 1 *1: Bolt
- 2 Leave the [A] to the vehicle side, remove the radiator support.

PART NAME

[A] Radiator Support Extension

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

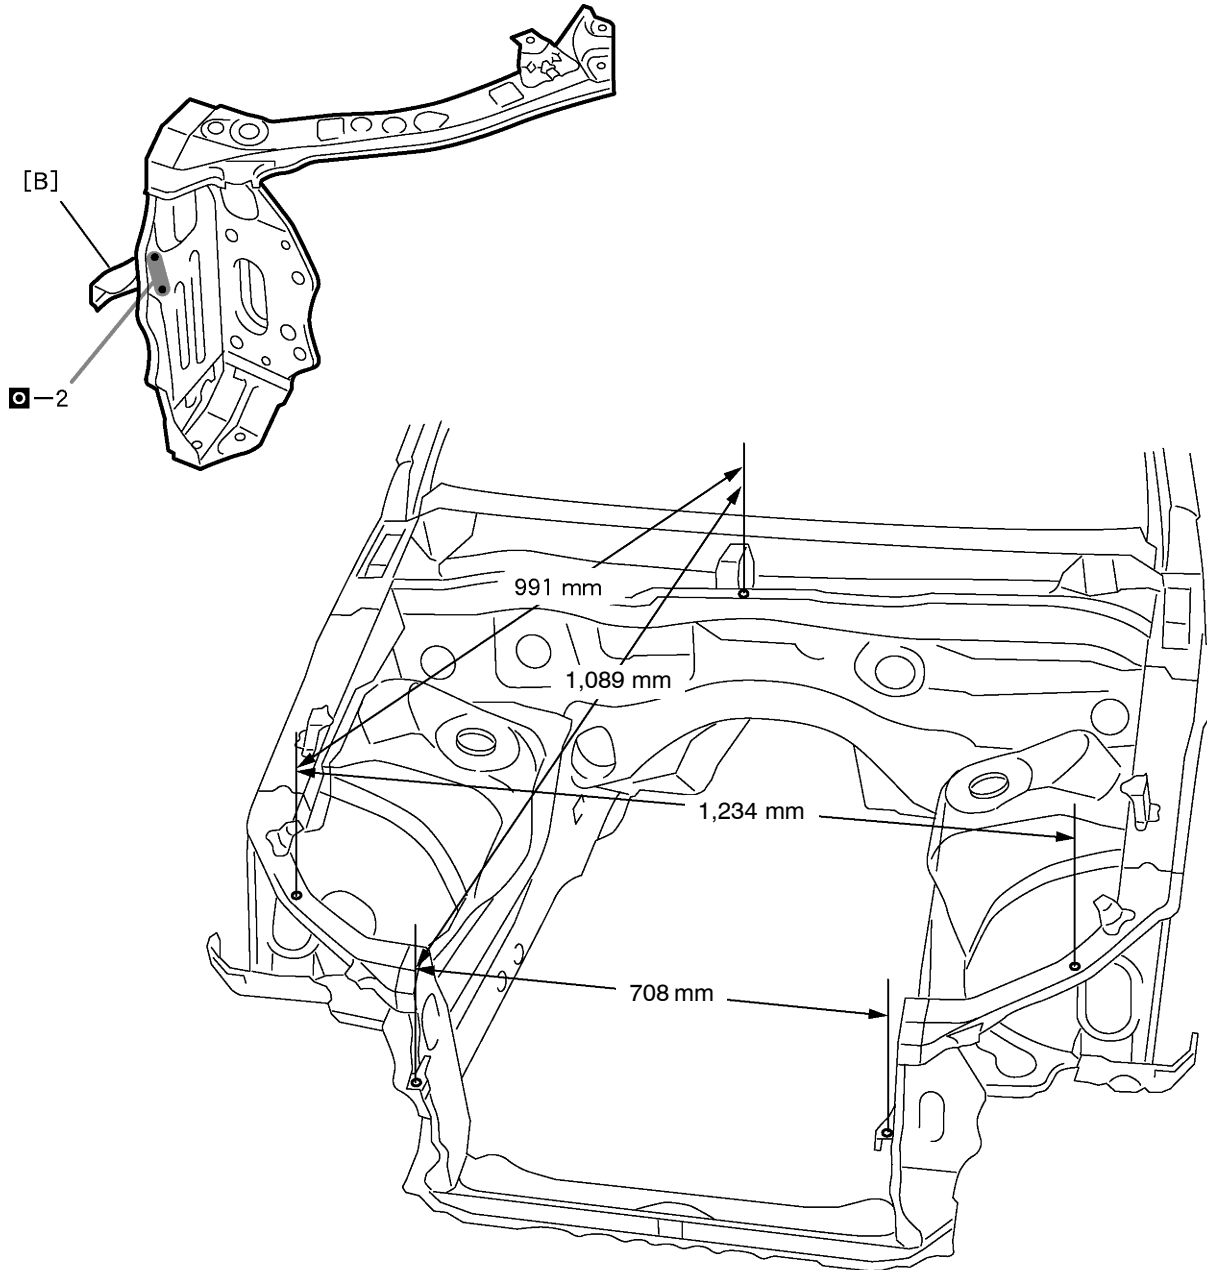

F22214

POINT

- 1 Measure the dimensions before installing the headlight.
- 2 These values are reference values.

PART NAME

[B] Front Bumper Arm Mounting Bracket

708 mm (27.87 in.)	991 mm (39.02 in.)	1,089 mm (42.87 in.)	1,234 mm (48.58 in.)
--------------------	--------------------	----------------------	----------------------