


## FRONT SIDEMEMBER (CUT-P)



### REPLACEMENT

With the front fender front apron removed.

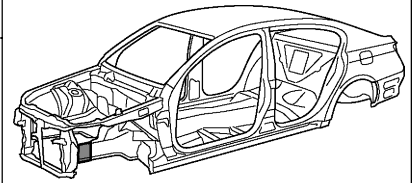

F22221A

### REMOVAL

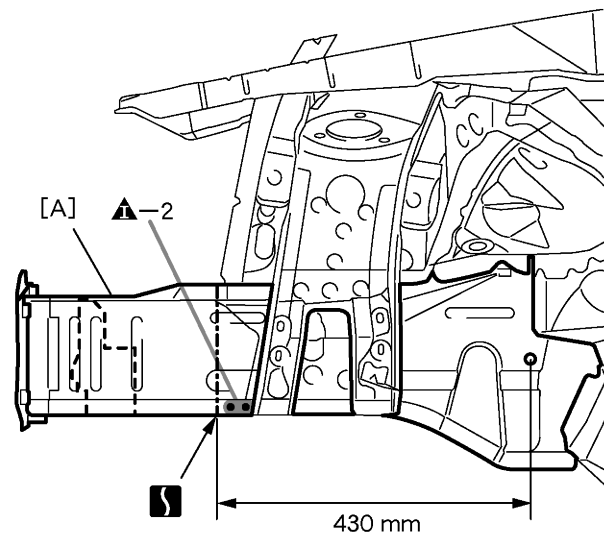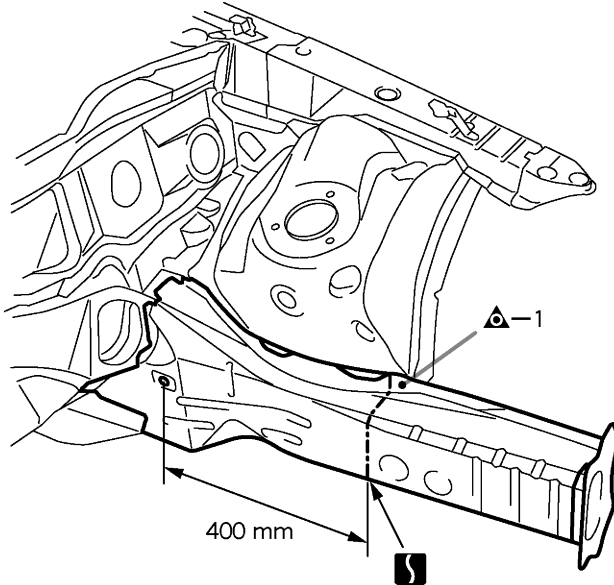

F22221

### POINT

1 Remove the [A] at the same time.


### PART NAME

[A] Front Sidemember Outer Plate

400 mm (15.75 in.)      430 mm (16.93 in.)

**INSTALLATION**

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

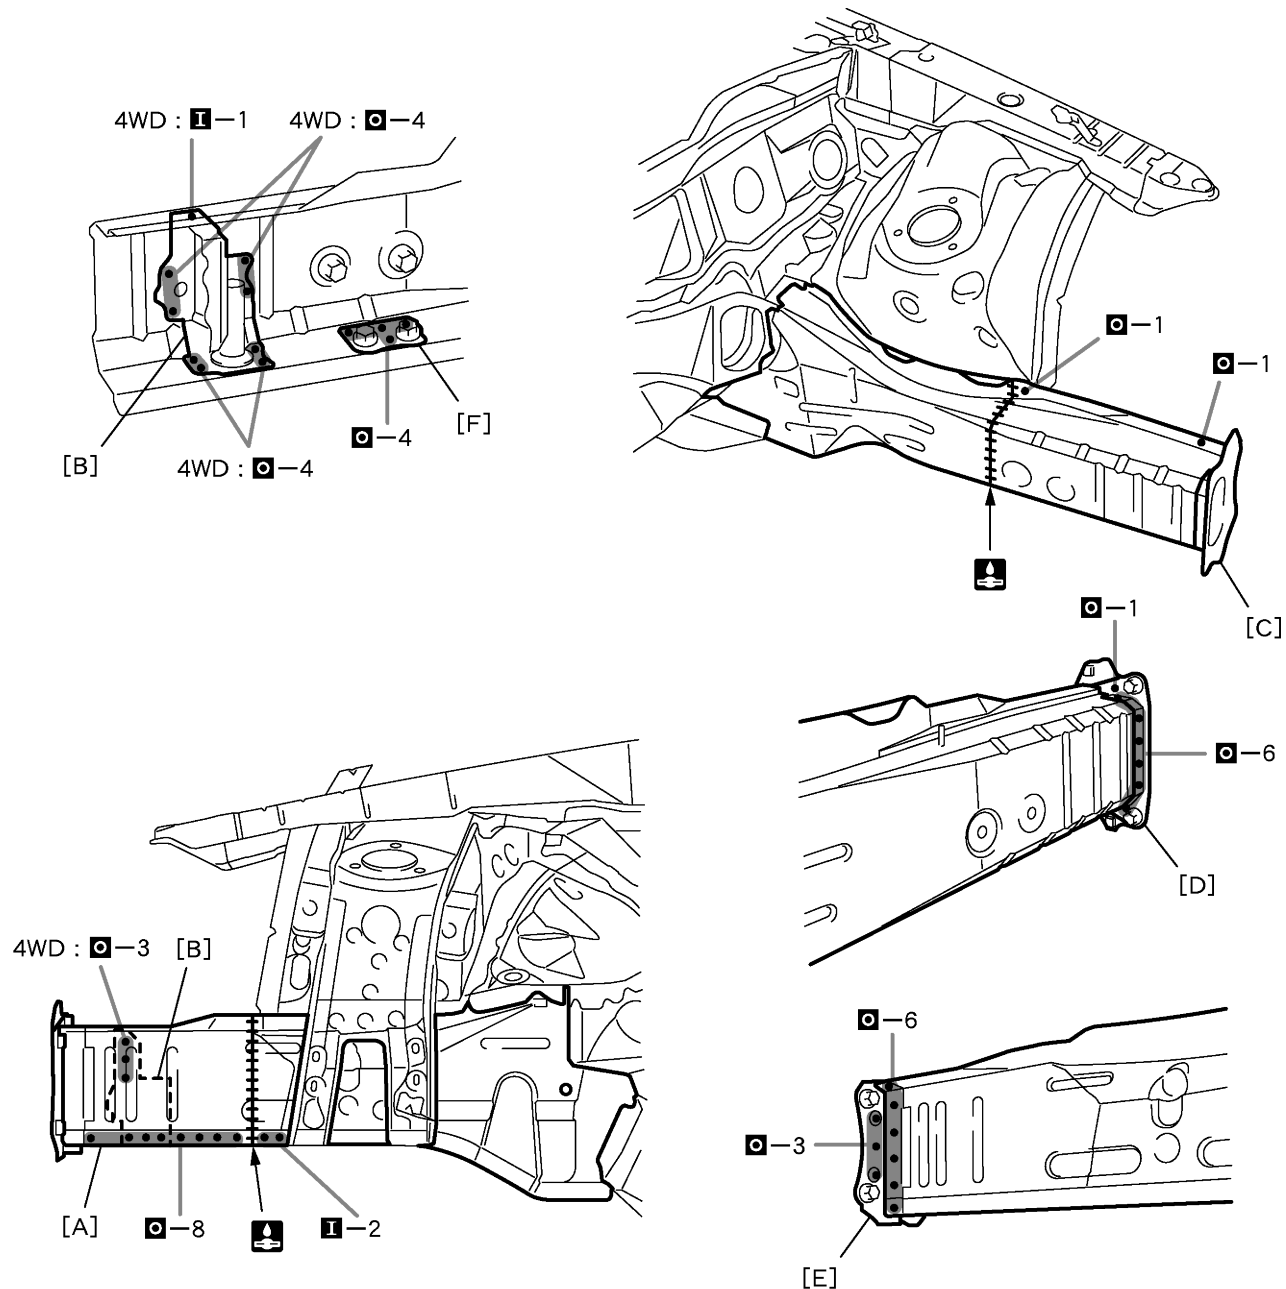

F22222

**POINT**

- |                                         |                                            |
|-----------------------------------------|--------------------------------------------|
| [A] Front Sidemember Outer Plate        | [B] No. 7 Body Mounting Bracket (4WD only) |
| [C] Front Bumper Arm Retainer           | [D] Front Bumper Arm Support               |
| [E] Front Sidemember No.1 Reinforcement | [F] Front Sidemember No.4 Plate            |