


BODY PANEL SEALING AREAS

HINT:

- 1) Prior to applying body sealer, clean the area with a rag soaked in silicone remover.
- 2) If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.
- 3) Wipe off excess body sealer with a rag soaked in silicone remover.
- 4) If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.




Flat Finishing










No Flat Finishing

1. ENGINE COMPARTMENT

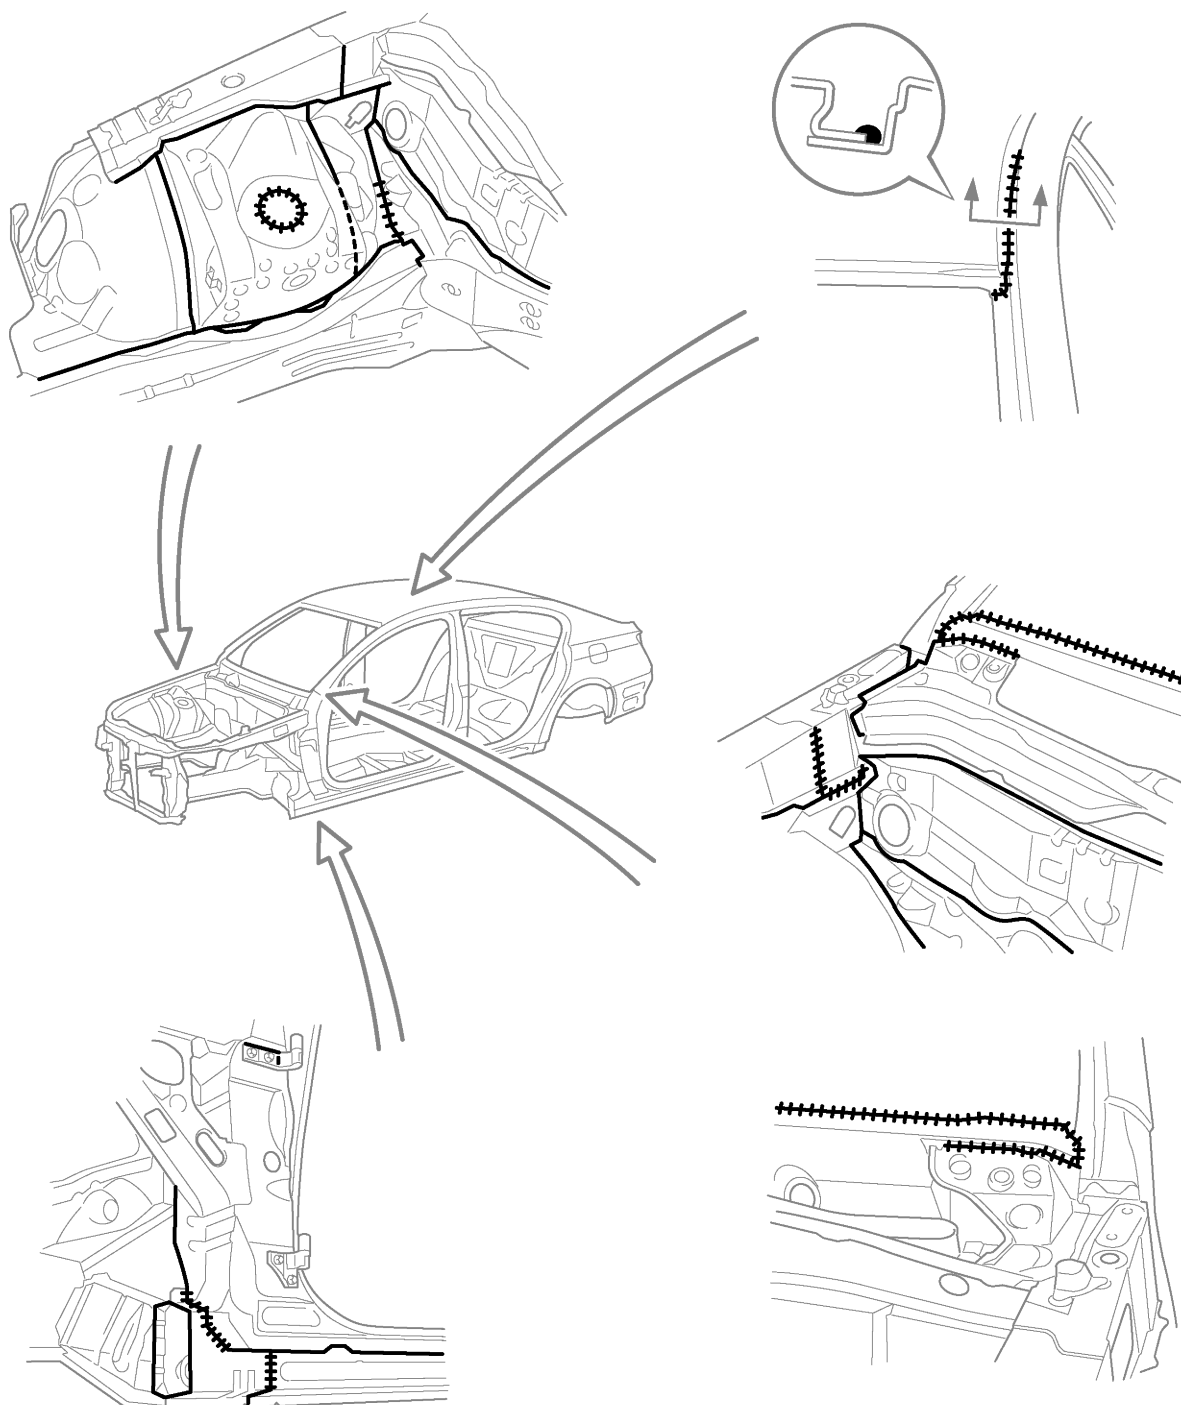


2. INSIDE

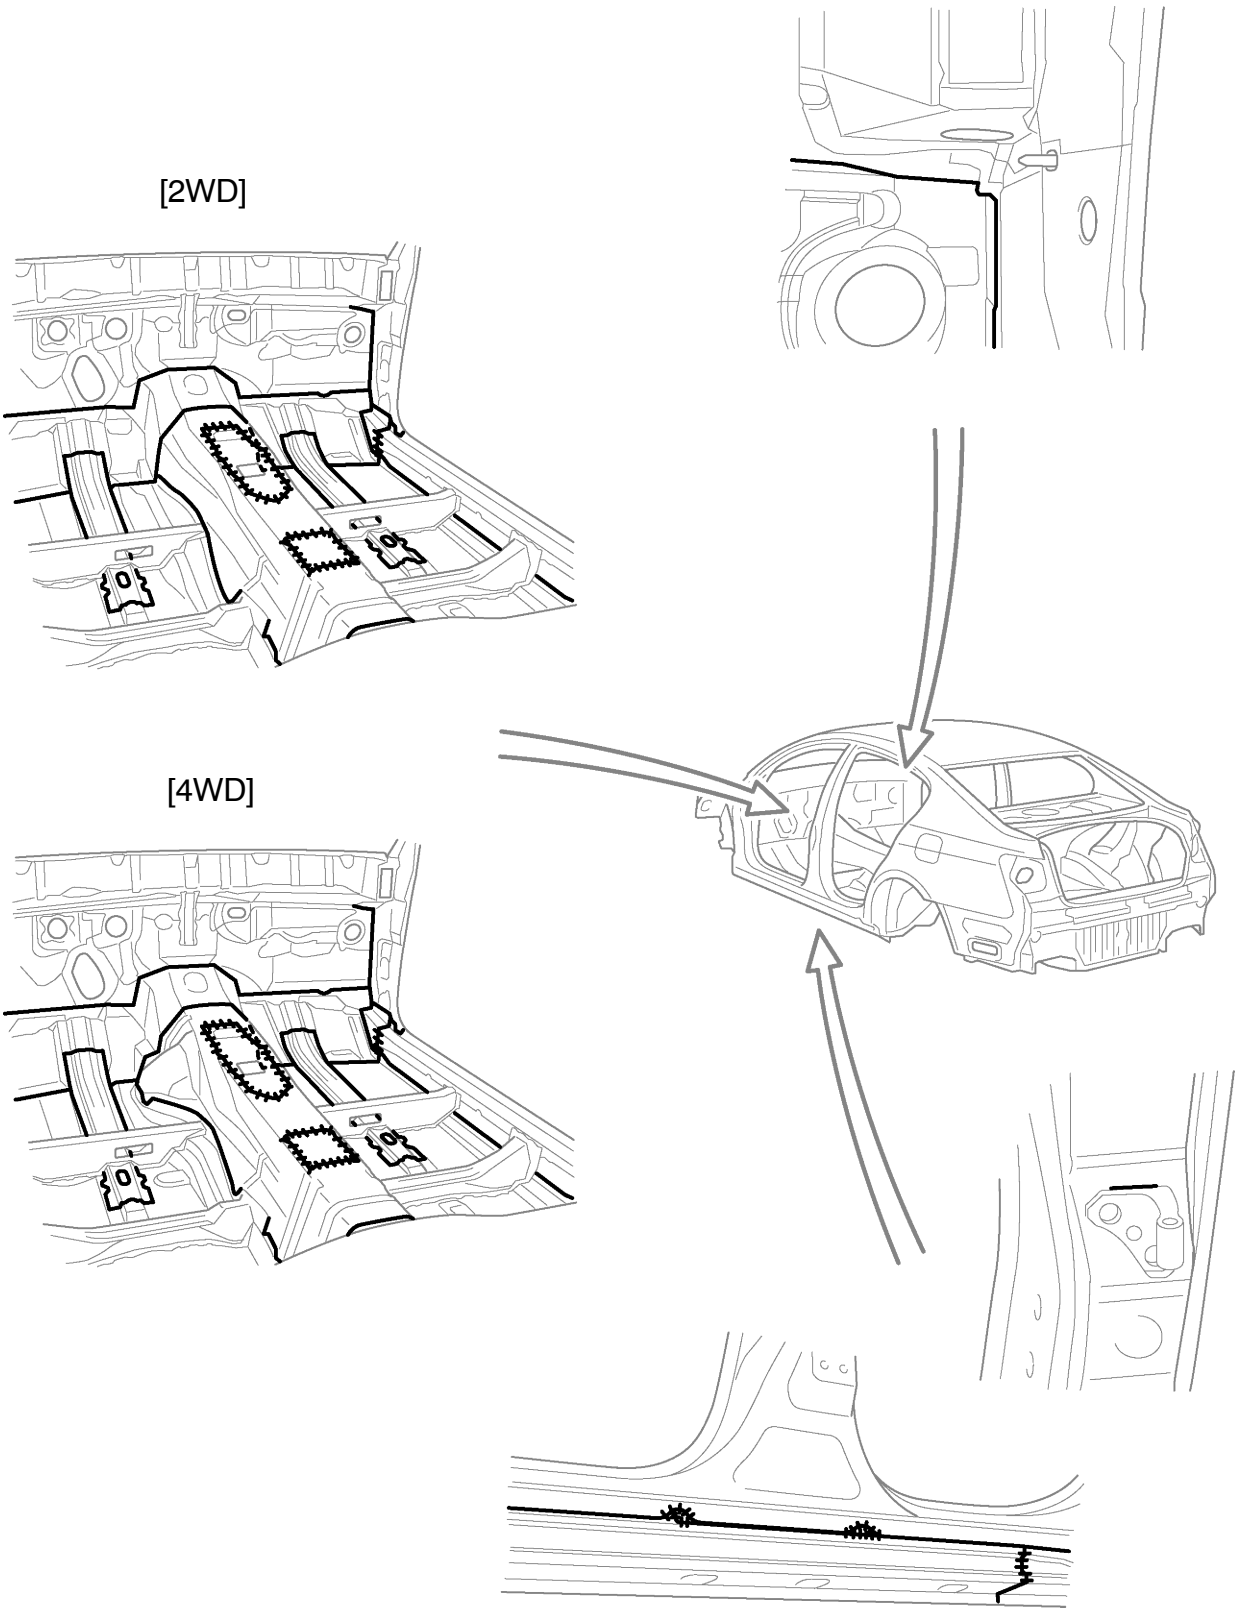

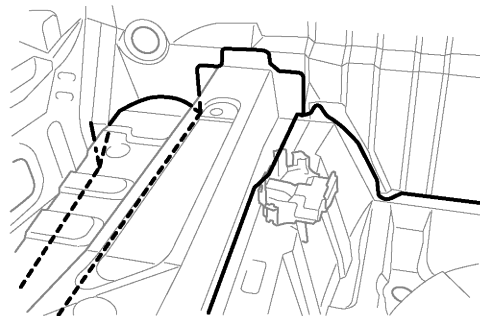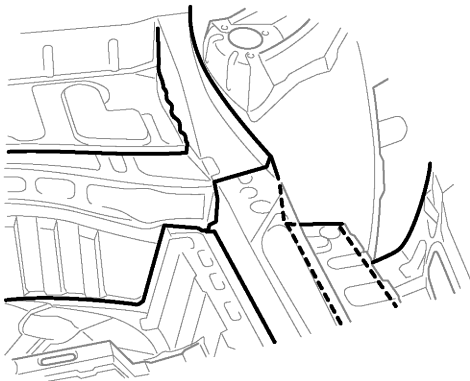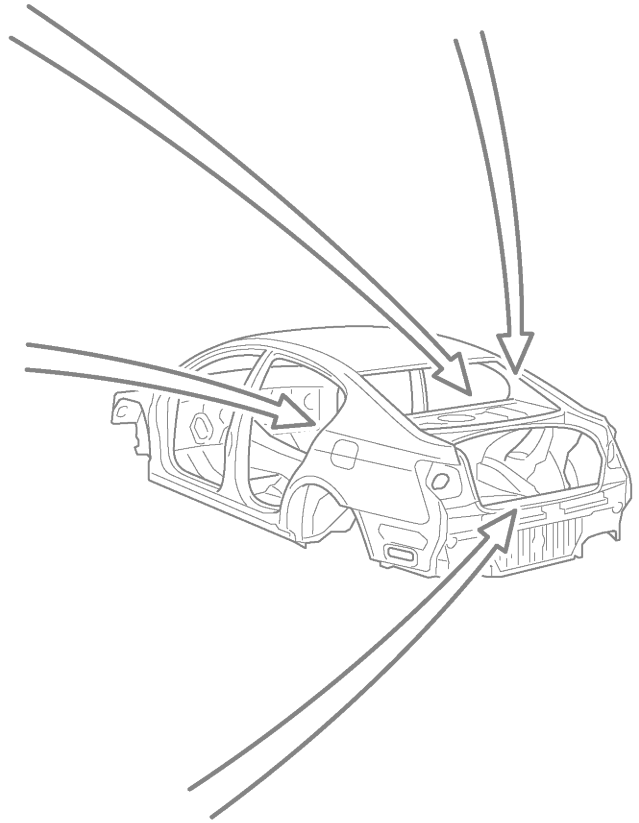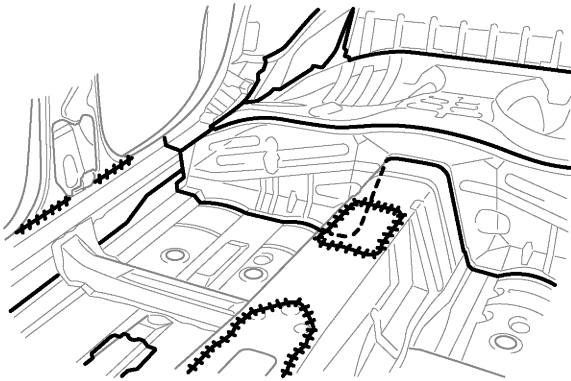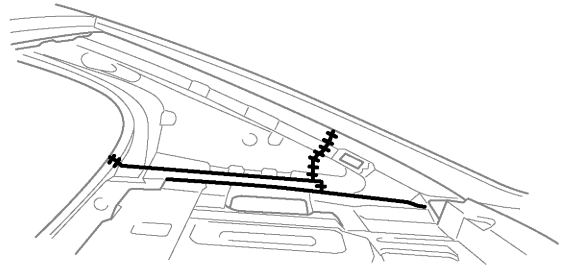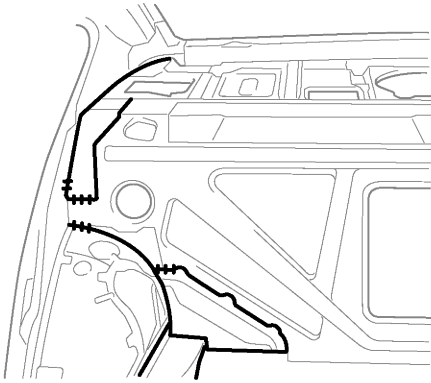

3. OUTSIDE

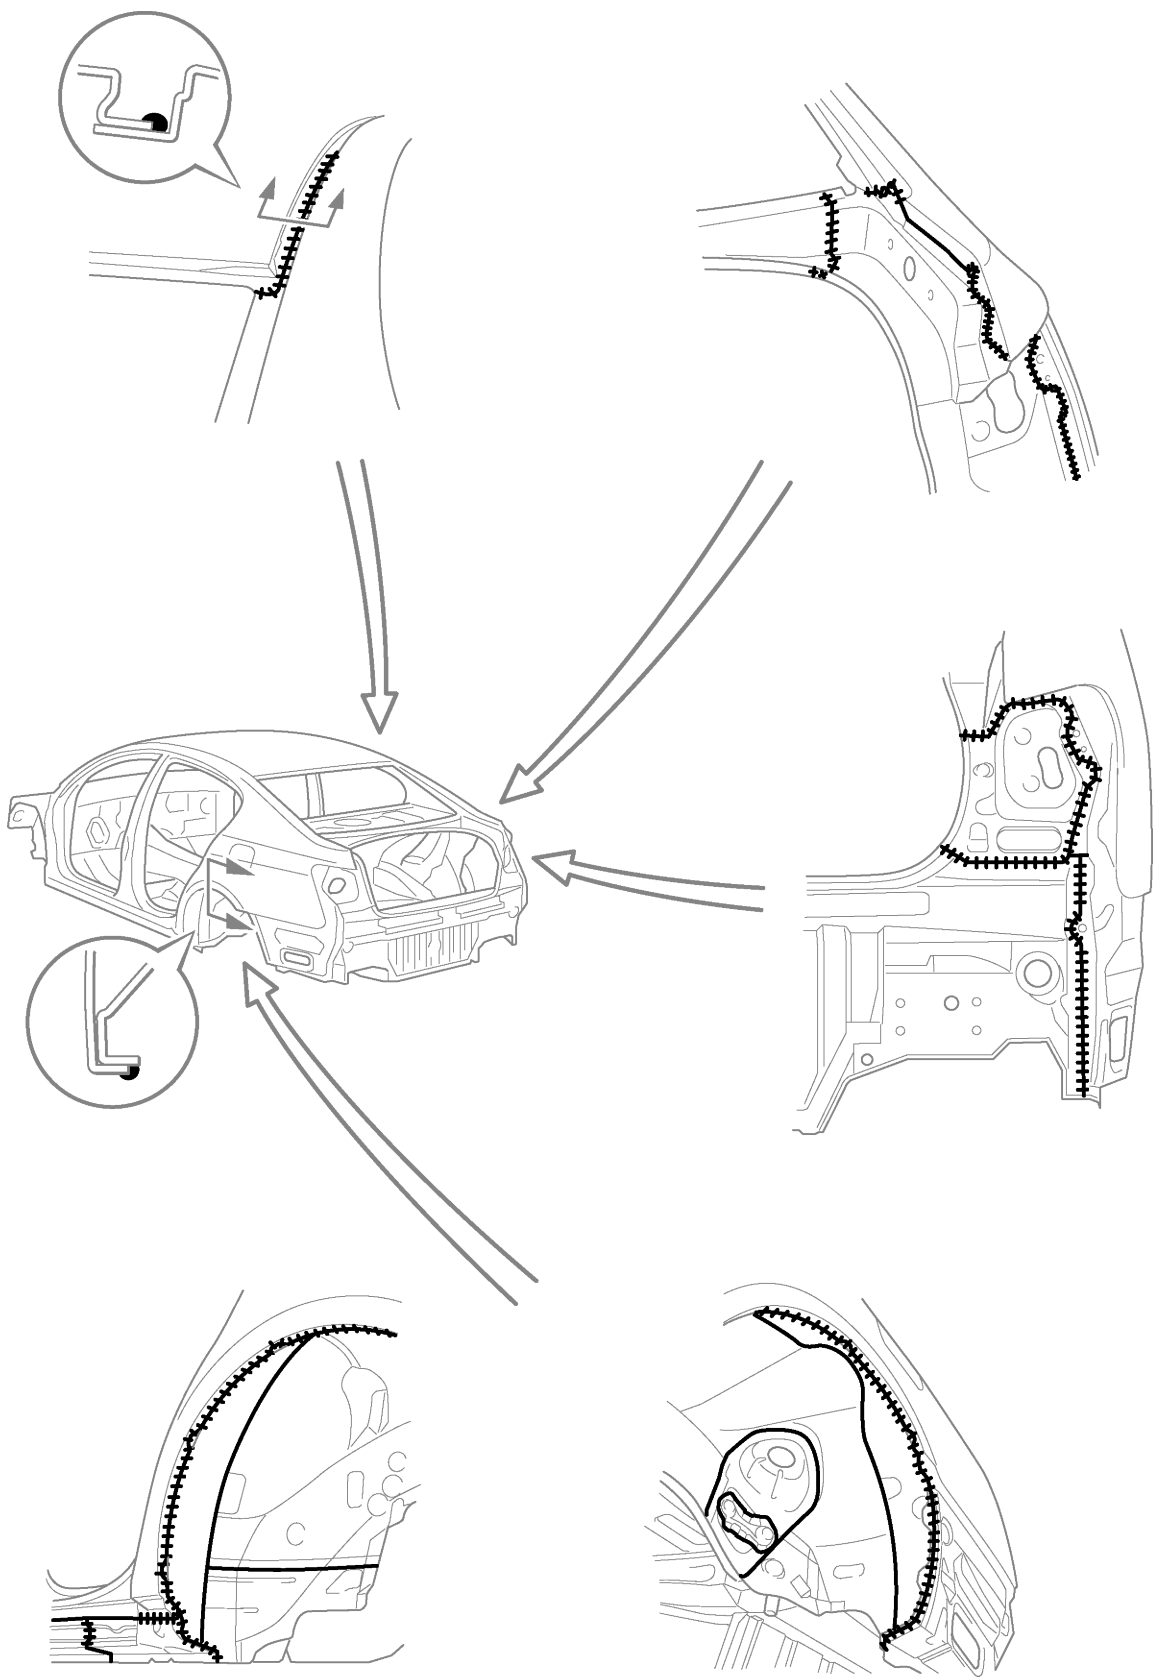

4. DOOR PARTS

