



SILENCER SHEET INSTALLATION AREAS

HINT:
1) Use a silencer seat as a replacement of damping coat in the area where damping coat is applied.

[2WD]

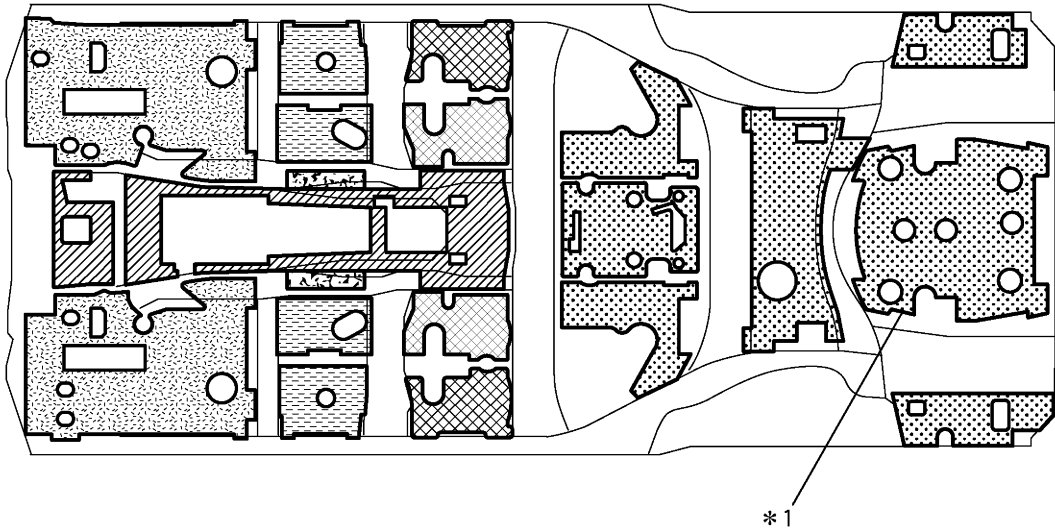

[4WD]

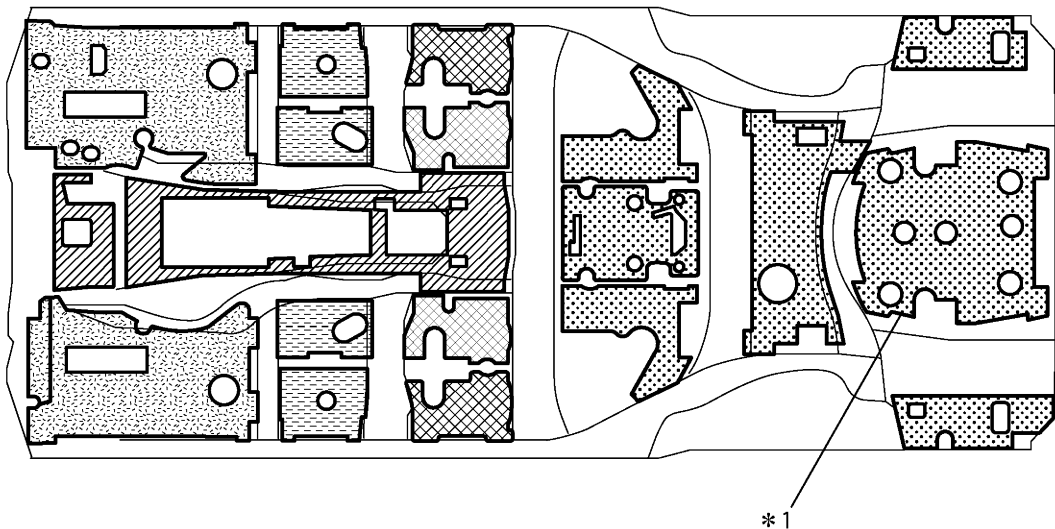

F22210

Thickness of Silencer Sheet

	1.5 mm (0.059 in.)		2.0 mm (0.079 in.)		3.0 mm (0.118 in.)
	5.0 mm (0.197 in.)		5.4 mm (0.213 in.)		7.0 mm (0.276 in.)

*1 Ex. U.S.A., CANADA