


SEAT BELT

Seat Belt Outline

- All seats are provided with three-point ELR (Emergency Locking Retractor) seat belts.
- In the front seats, both the driver's and front passenger's seats use seat belts with a pretensioner + force limiter. In addition, a pre-crash seat belt, which uses a motor to wind the seat belt during sudden braking and thus enhance the effectiveness of the pretensioner is provided.
- Each rear outer seat uses a seat belt with a pretensioner + force limiter, which is equipped with a child seat anchoring mechanism. It changes into a child seat anchoring mechanism when the belt is pulled out entirely. In this state, the belt can be wound but cannot be pulled out. When the belt is wound over a predetermined amount, it cancels the child seat anchoring mechanism and reverts to the normal ELR state.
- The shoulder belt guide at each rear outer seat is provided with a rerouter mechanism that changes the routing of the seat belt.
- All seats except the rear center seat are provided with an electric tension reducer to reduce the sense of oppression felt by the occupants wearing the belts.
- The driver's and front passenger's seat belts use adjustable shoulder belt anchors. These anchors can be adjusted vertically in five steps to accommodate occupants of various physical sizes. In addition, slip joints are built into the center pillar upper garnishes to ensure the proper appearance.

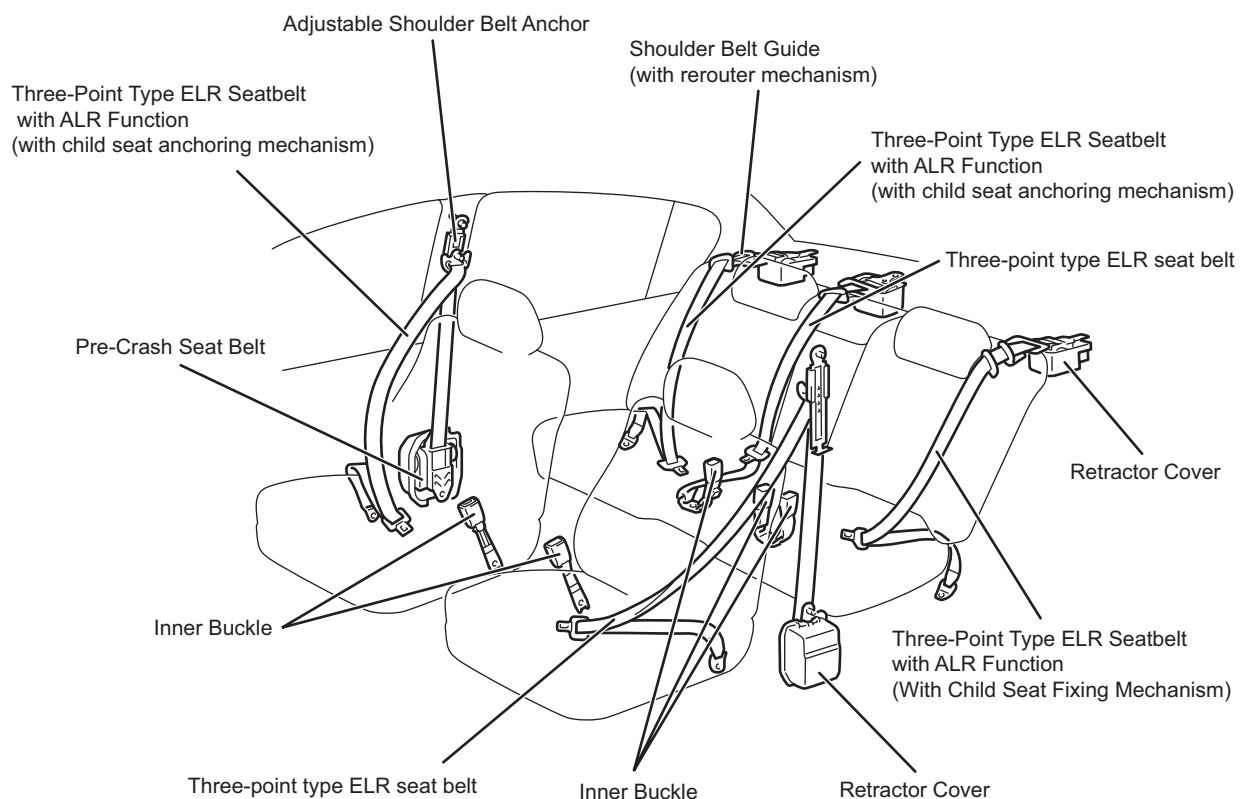

A4270263B