


Front Wiper Link

- Wiper arms with a mechanism that switches between fully concealed and semi-concealed states and a lock back mechanism are provided on all models.

Semi Concealed/Fully Concealed Switching Function


- To switch between the fully concealed and semi-concealed states, manually move either the right or left wiper arm in the direction of rotation along the windshield glass, while the wipers are in the automatically stopped state. While the wipers are in the fully concealed state, grasp a wiper arm at an area near the joint between the wiper arm and the wiper blade, and pull it upward in order to switch to the semi-concealed state. While the wipers are in the semi-concealed state, push the joint downward with the palm of your hand in order to switch to the fully concealed state. (Do not grasp the wiper blade to perform this operation because it could deform the wiper blade. Therefore, make sure to perform this operation by grasping the wiper arm.) Make sure to set the wipers in the semi-concealed state when using winter blades on them.

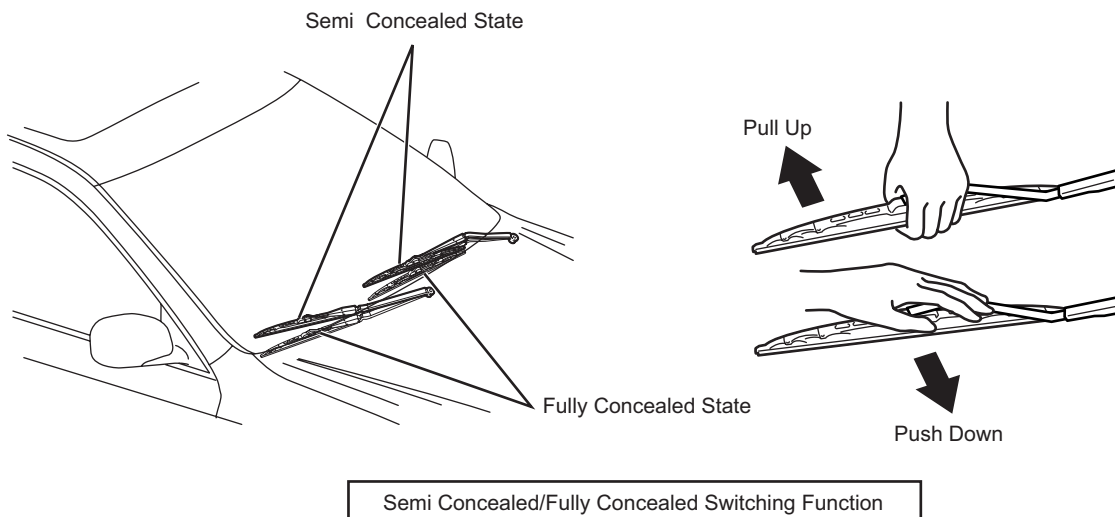

A4270150E

Lock Back Formula Wiper Arm

- Before locking back the front wipers, switch them to the semi-concealed state using the aforementioned procedure. Then, move the wiper arms in the arrow direction shown in the diagram in order to lock them back.

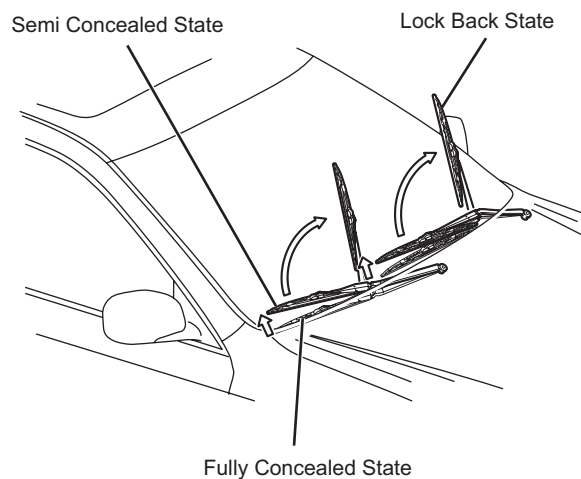

A4270151E