


Ball Joint Mechanism


- The ball joint mechanism consists of a spherical flange, a bolt, and a spring to support the sealing area of the gasket. This is more compact than a flexible pipe, and can be installed in an optimal position to counter vibrations.
- The ball joint (the spherical areas of the flange and the gasket) absorbs the vibration of the engine as well as the vibration of the exhaust pipe in order to reduce the droning sound and vibration in the cabin.

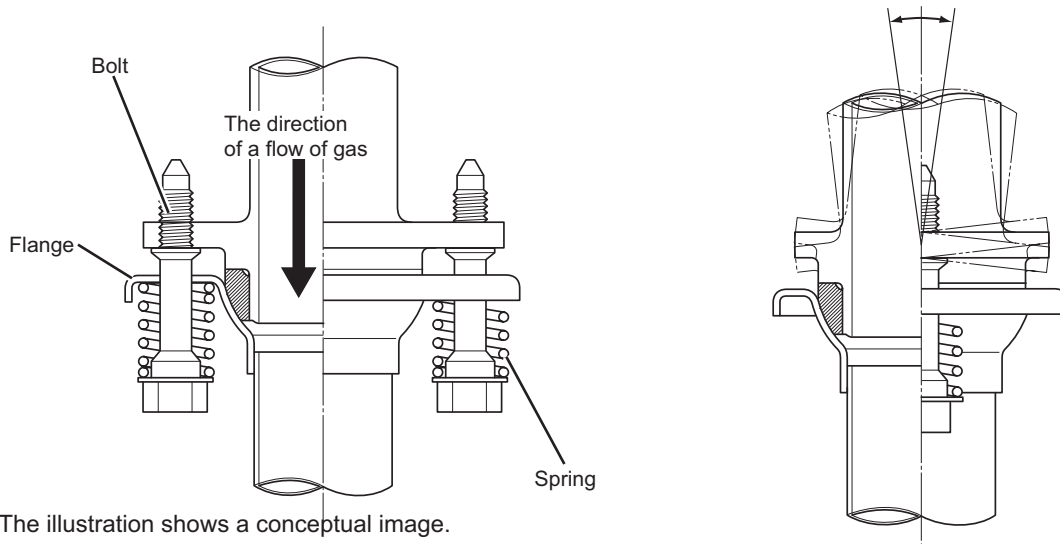

A4270077P

Muffler

- Dual main mufflers are provided to reduce back pressure, which improves the power output of the engine. A long tail construction is used inside the main muffler to suppress the low-frequency exhaust sounds, thus reducing the sounds in the cabin.

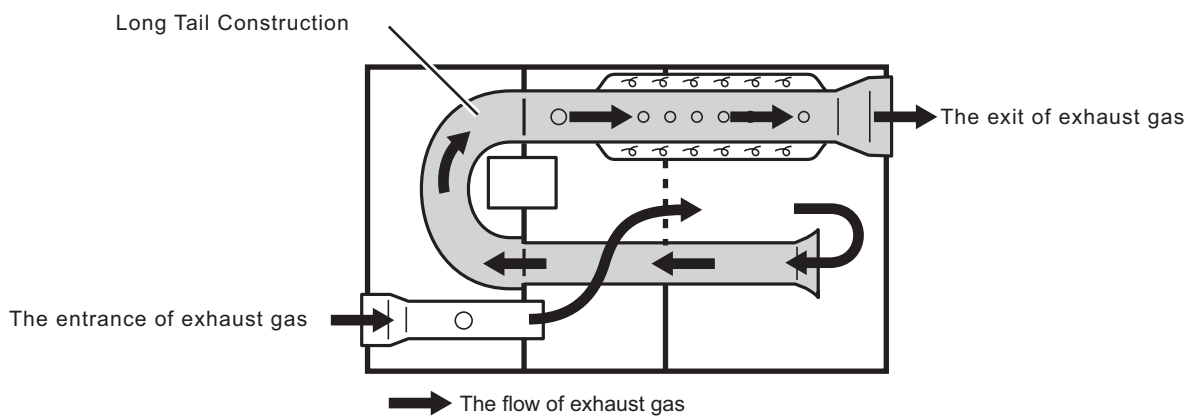

A4270078P

Three Way Catalytic Converter

- An ultra thin-wall, high cell density ceramic catalyst with an optimized amount of precious metals held is placed directly below each exhaust manifold and in each front pipe. These catalysts ensure a high level of warm-up performance immediately after the engine is started, thus reducing exhaust emissions and complying with the Step-IV European Tailpipe Emission Regulations.