




Rear Lower Arm & Bushing

- A lower arm No. 2 made of stamped high-strength sheet steel is used to ensure high rigidity. On the body side, a bushing with an external cylinder is used, and on the axle side, a pillow ball bushing is used to realize high support rigidity and excellent ride comfort.
- Excellent ride comfort, drivability, and stability have been ensured through the optimization of these bushing characteristics.

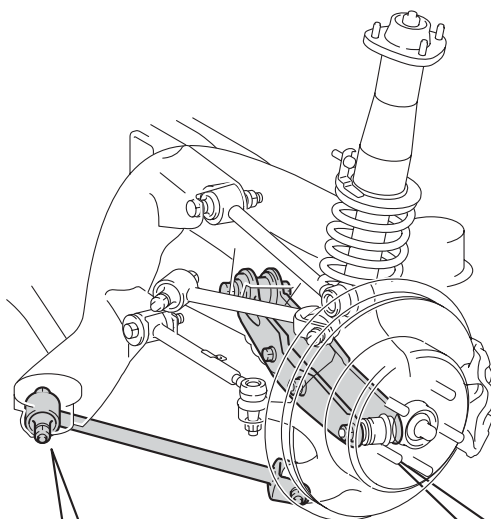


Body Side




Axle Side

Lower Arm No.1 Installation Cross Section



Body Side

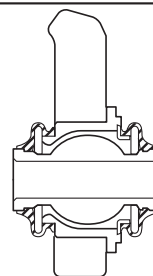

Axle Side

Lower Arm No.2 Installation Cross Section