


LUGGAGE COMPARTMENT OPENING TROUGH (ASSY)



REPLACEMENT

With the quarter panel removed.



F24569A



REMOVAL

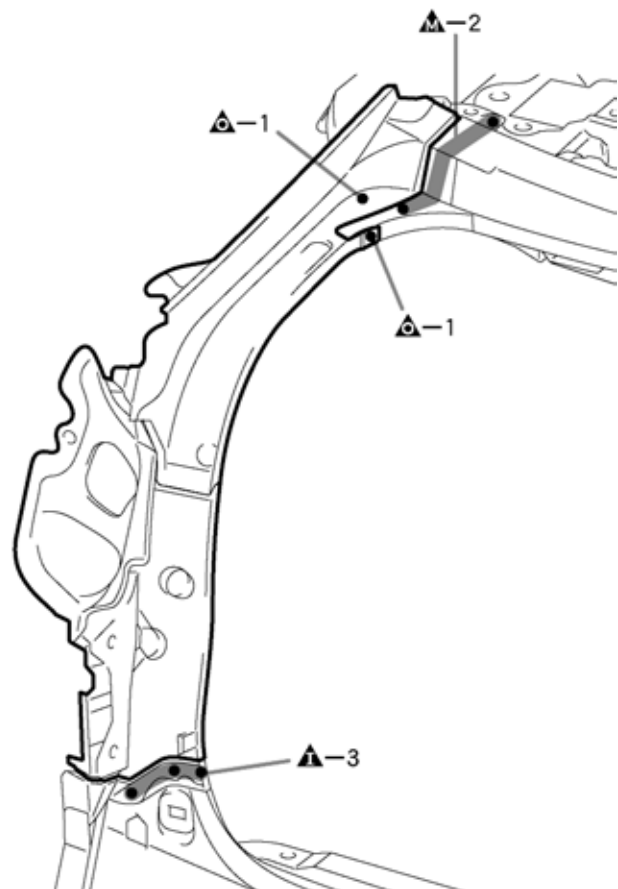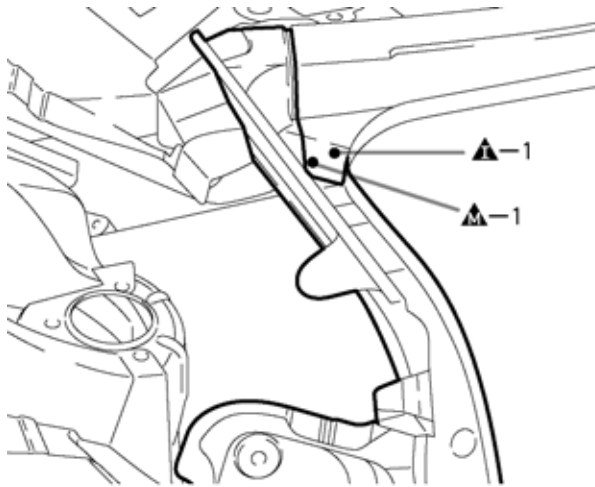

F24569

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply polyurethane foam to the corresponding parts.
- After welding, apply body sealer and undercoating to the corresponding parts.
- After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

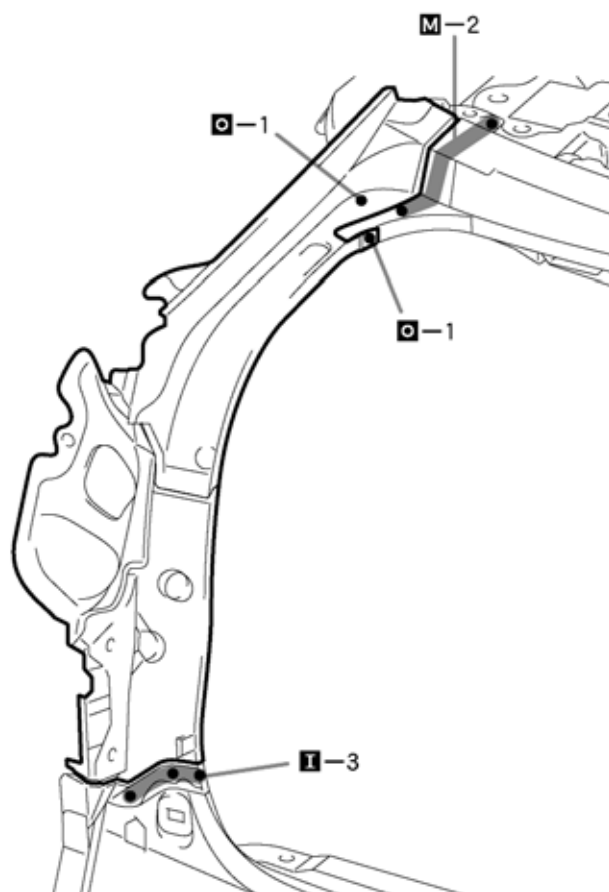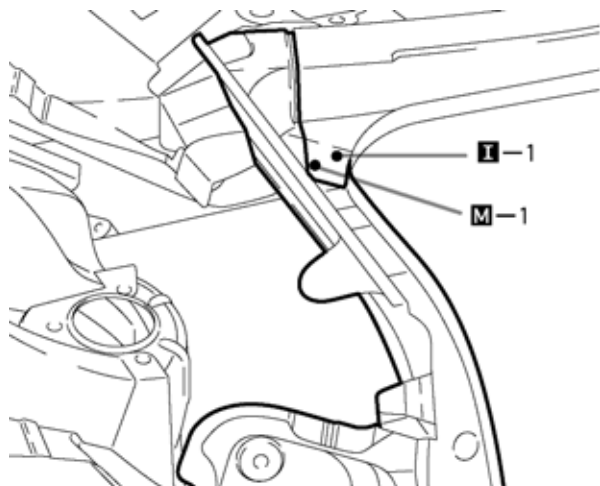

F24570

POINT

- 1 Inspect the fitting of the luggage compartment door, rear combination light and other related parts before welding as this affects the appearance of the finish.