



BODY PANEL SEALING AREAS

HINT:

- 1) Prior to applying body sealer, clean the area with a rag soaked in silicone remover.
- 2) If weld-through primer was used, first wipe off any excess and then coat with anti-corrosion primer before applying body sealer.
- 3) Wipe off excess body sealer with a rag soaked in silicone remover.
- 4) Be sure to repair as necessary if the body sealer shows signs of damage such as peeling or cracking.




Flat Finishing





No Flat Finishing

1. ENGINE COMPARTMENT




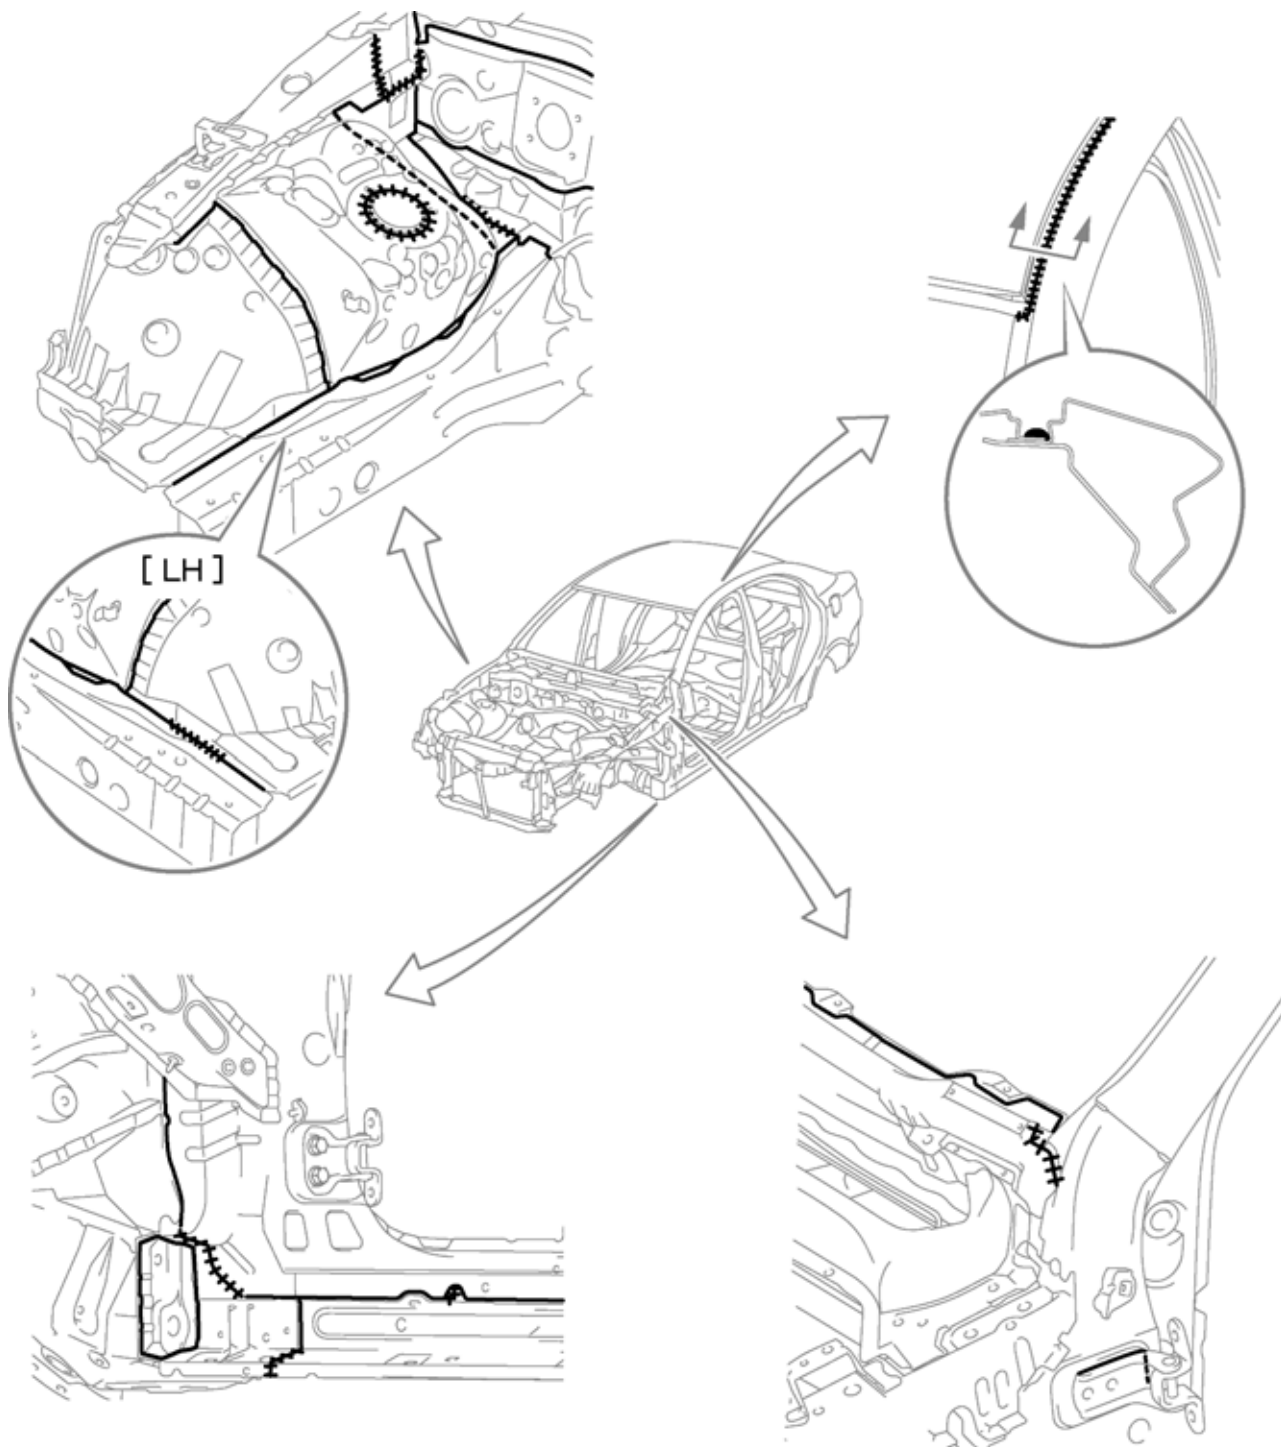



2. INSIDE


[2WD]

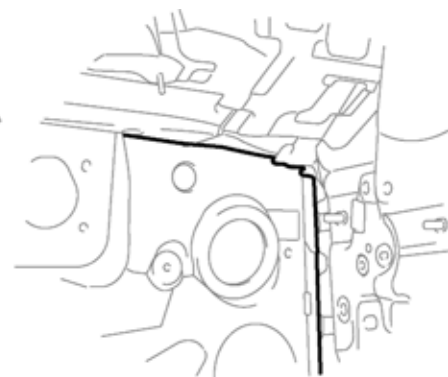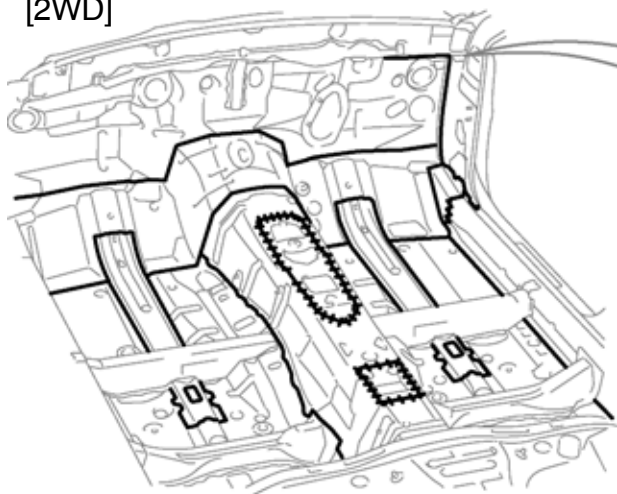

[4WD]

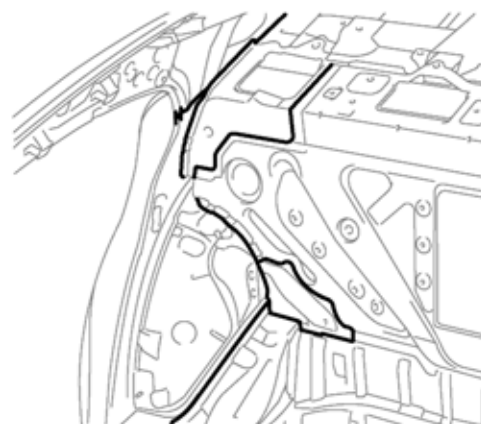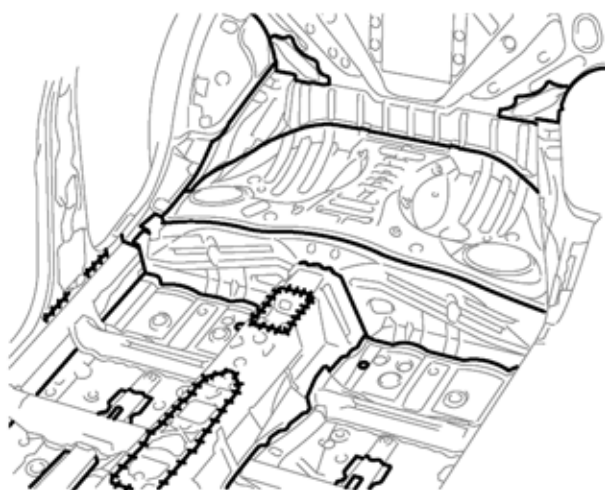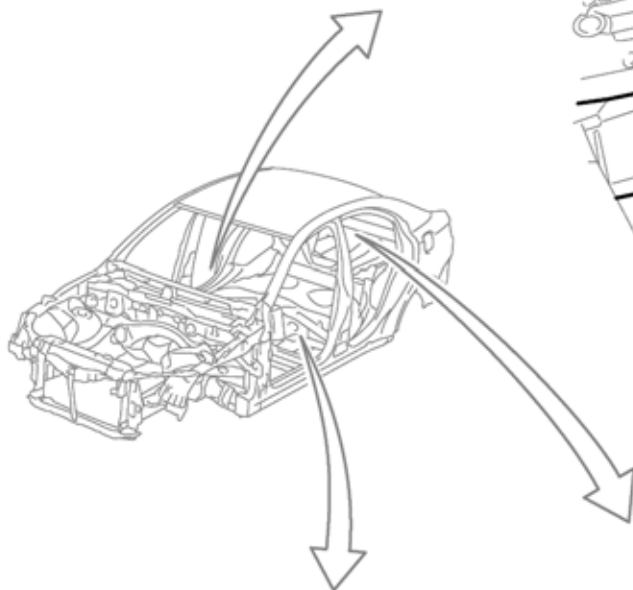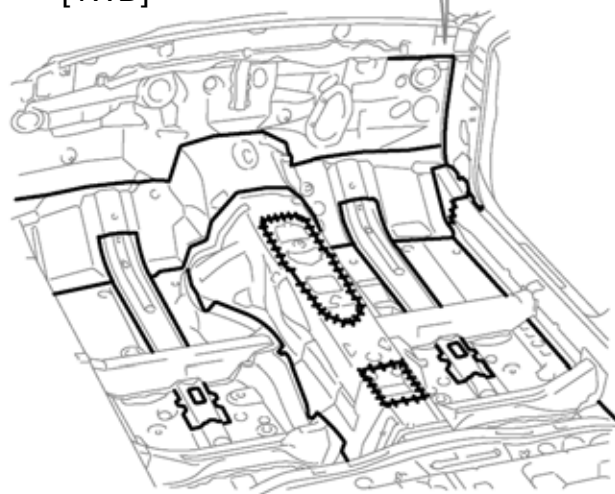

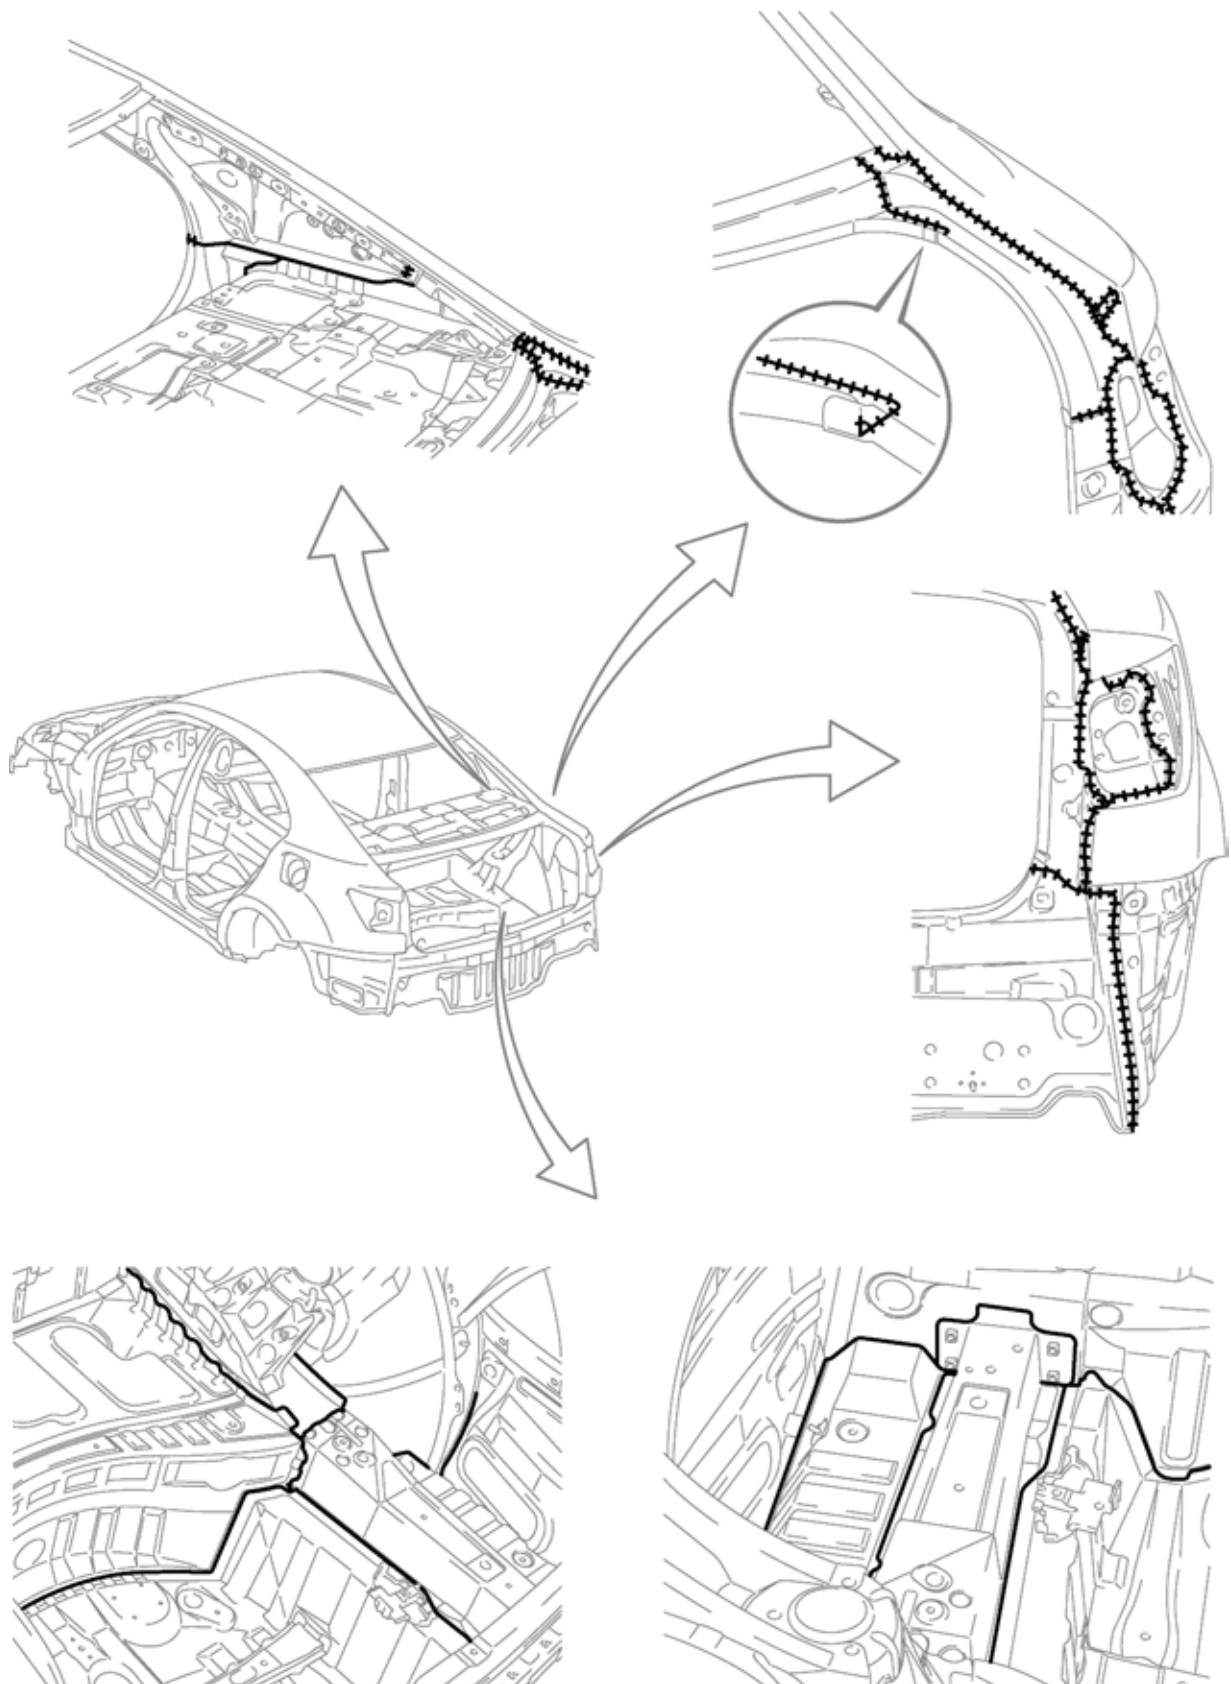3. REAR LUGGAGE COMPARTMENT

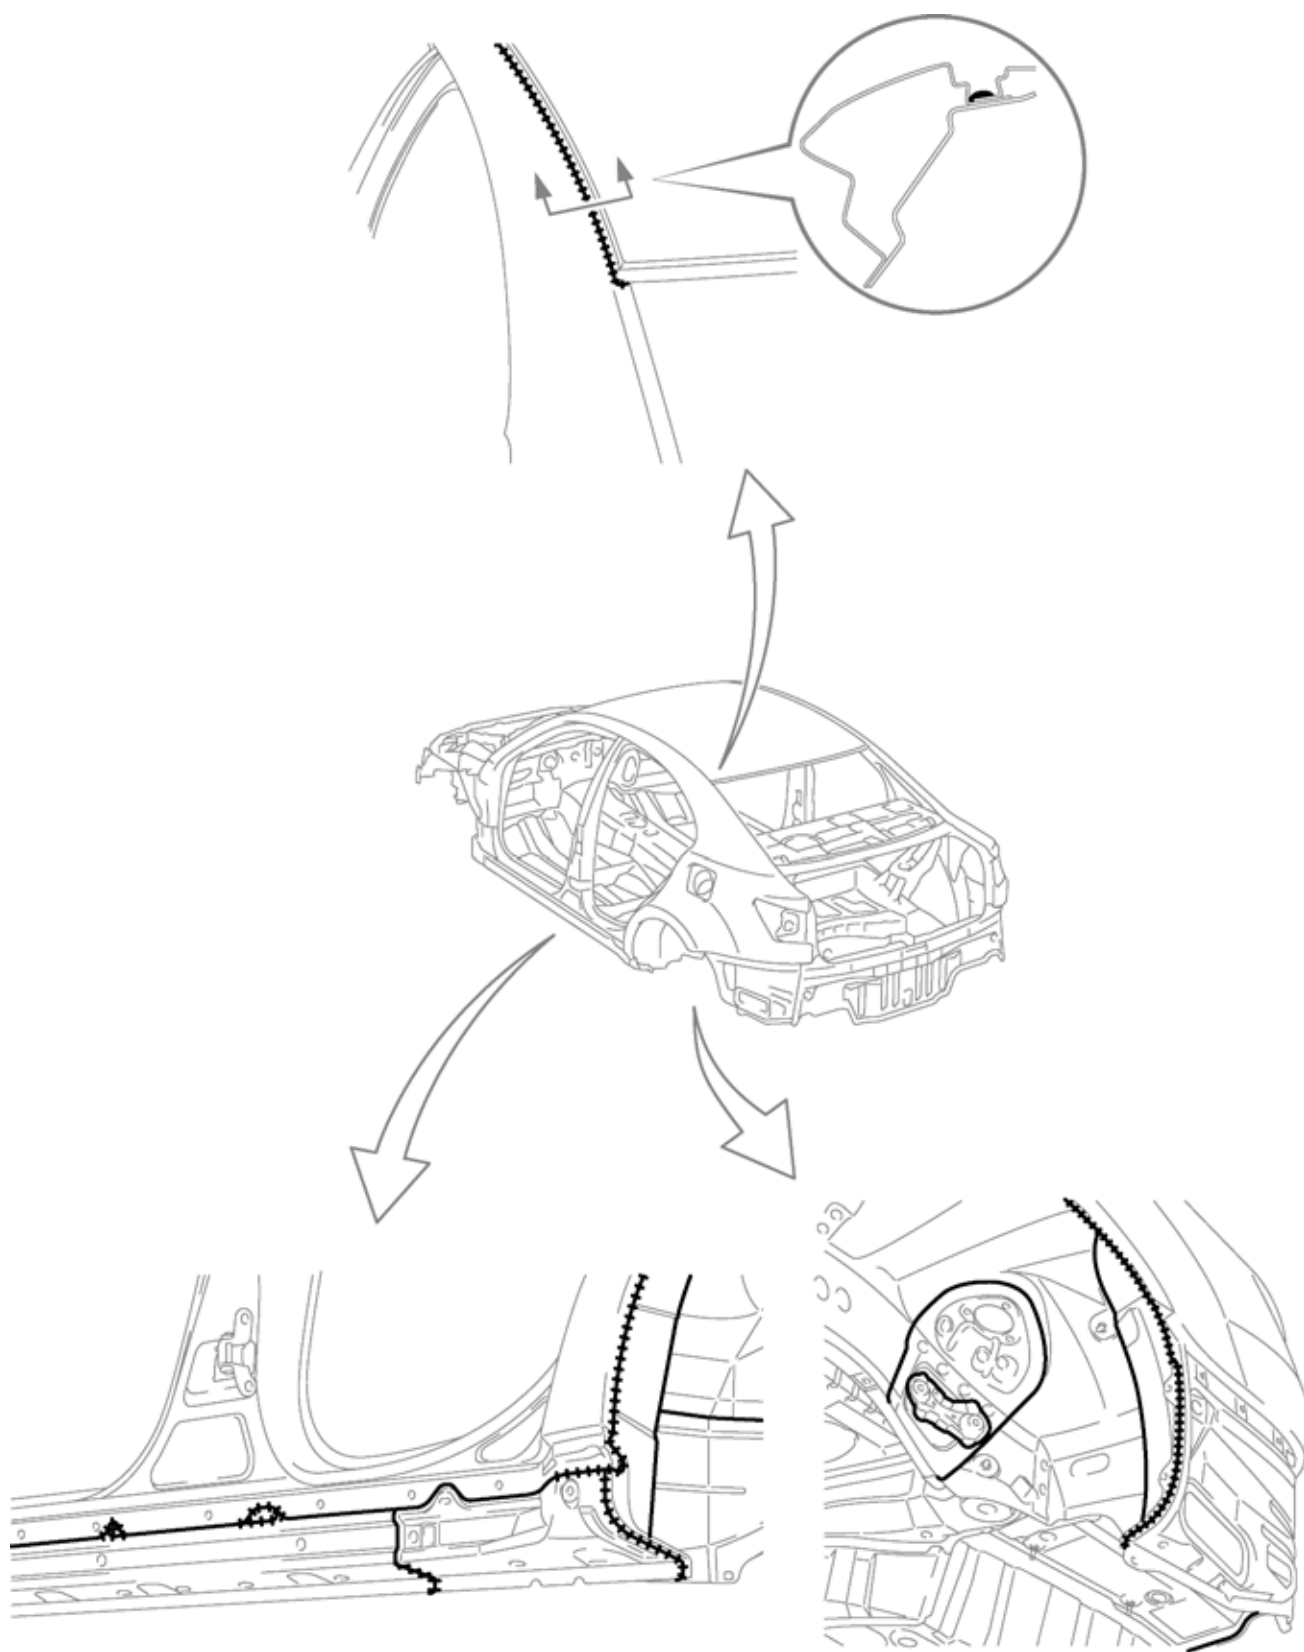

4. DOOR PARTS

