



SILENCER SHEET INSTALLATION AREAS

HINT:
1) Use a silencer sheet as a replacement of damping coat in the area where damping coat is applied.

[2WD]

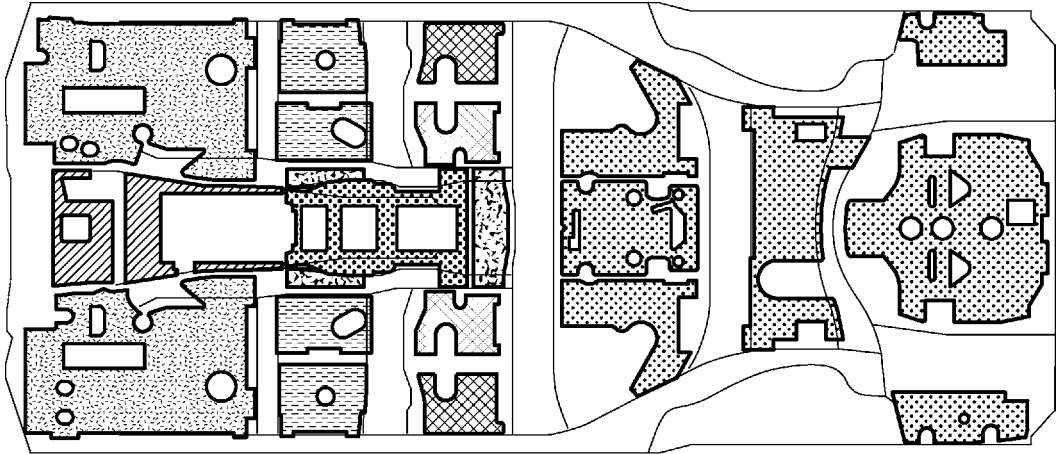

[4WD] USA Only

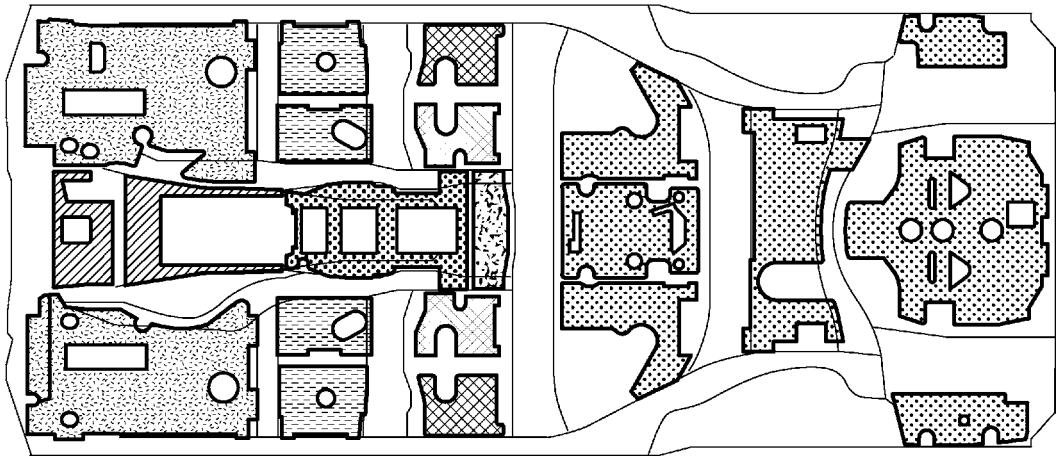

F24602

Thickness of Silencer Sheet

	1.5 mm (0.059 in.)		2.0 mm (0.79 in.)		3.0 mm (0.118 in.)
	4.2 mm (0.165 in.)		5.0 mm (0.197 in.)		5.4 mm (0.213 in.)
	7.0 mm (0.276 in.)	—	—	—	—