


■ AXLE

1. Front Axle

- A compact and highly rigid double-row angular ball bearing is used on the front axle. The double-row angular ball bearing and the axle hub have been integrated to ensure high rigidity, thus realizing excellent driving stability and braking stability.
- An active type speed sensor, which is capable of detecting extremely low rotation speeds, is used. The active speed sensor and the magnet type rotor are a built-in type.

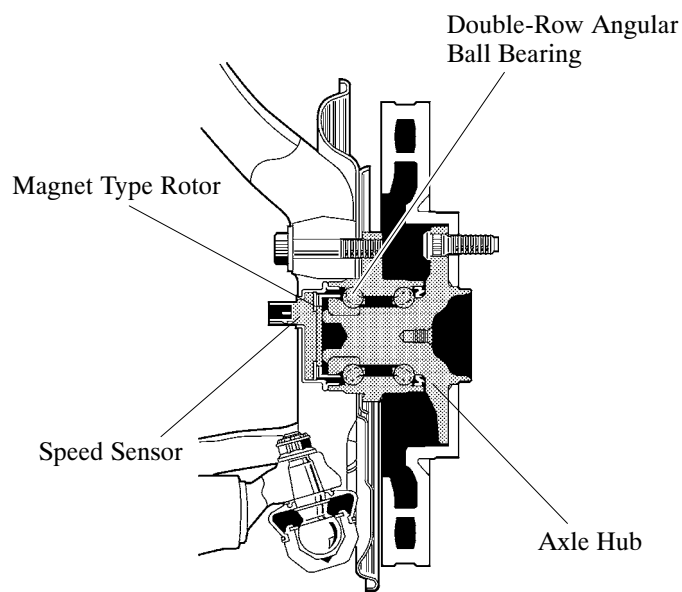


281CH36

2WD Model

2. Rear Axle

- The rear axle uses compact and highly rigid double-row angular ball bearings. The bearings and the axle hub have been integrated to ensure high rigidity, thus realizing excellent driving and braking stability.
- A 12-point lock nut is used and staked in order to ensure that the axle hub is properly secured. Once removed, this nut cannot be reused.

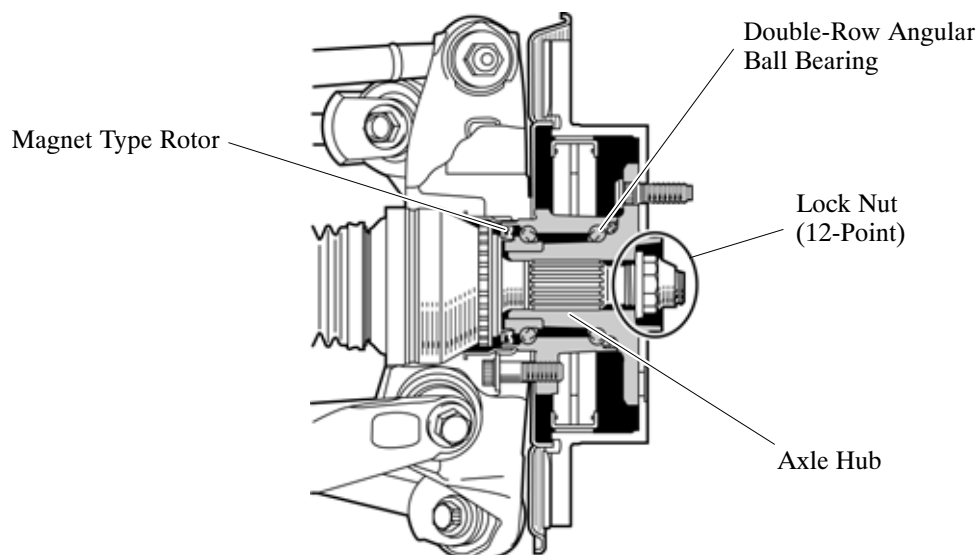

0150CH10C