


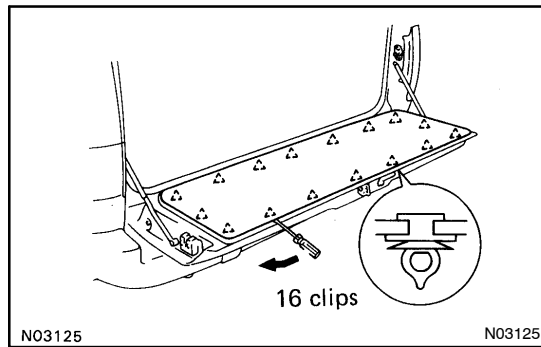

## LOWER BACK DOOR DISASSEMBLY

B03F0-01

### 1. REMOVE DOOR TRIM

- (a) Insert a screwdriver, between the door and the door trim to pry it loose.


#### NOTICE:

**Be careful not to damage the door and trim.**

#### HINT:

Tape the screwdriver tip before use.

- (b) Remove the door trim.

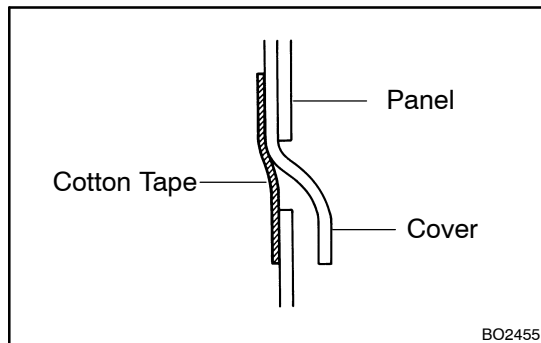

### 2. REMOVE THESE PARTS:

- (a) Service hole cover

#### NOTICE:

**At the time of reassembly, do not block the clip sealing with the tape.**

#### HINT:

Bring out the link through the service hole cover.

- (b) Door lock control  
(c) Door lock

#### HINT:

At the time of reassembly, apply MP grease to the sliding surface of the door lock.

- (d) License plate light cover