



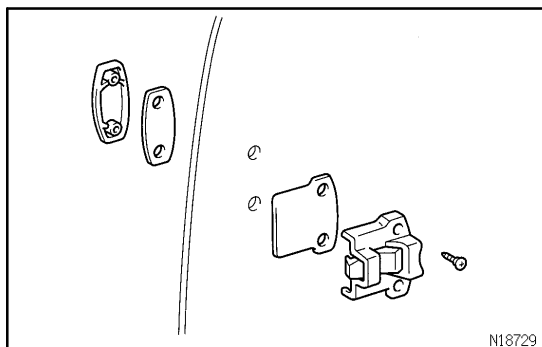

DISASSEMBLY


1. REMOVE GLASS LOCK

Remove the 2 screws, lock, grommet, plate and retainer.

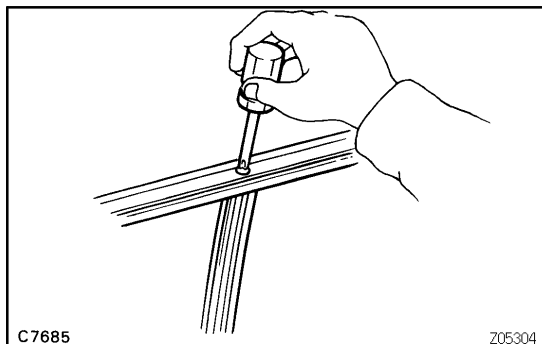

2. REMOVE CENTER SASH

Remove the screw and the weatherstrip.

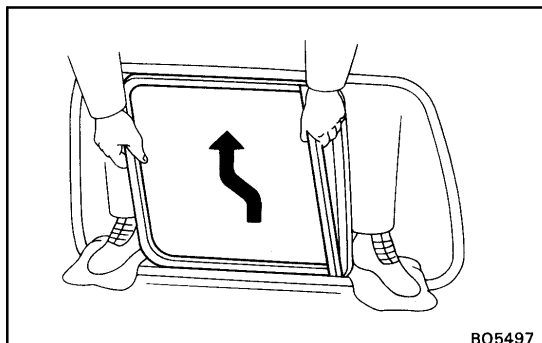

3. REMOVE QUARTER WINDOW GLASS

Pull up the sash and remove the 2 glasses.

4. REMOVE QUARTER WINDOW GLASS RUN FROM SASH

5. REMOVE QUARTER WINDOW WEATHERSTRIP FROM SASH