



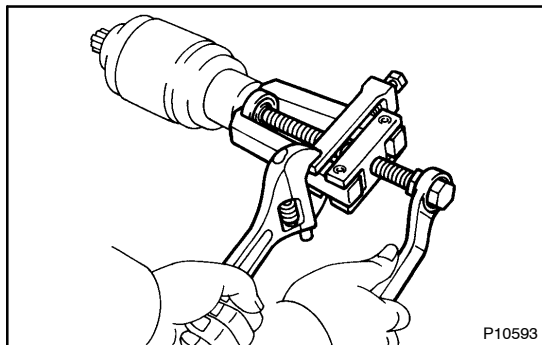


REPLACEMENT

1. REPLACE FRONT BEARING

- (a) Using a SST, remove the bearing.
SST 09286-46011

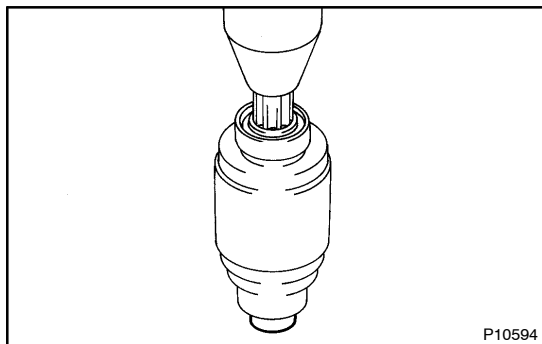


- (b) Using press, press in a new bearing.

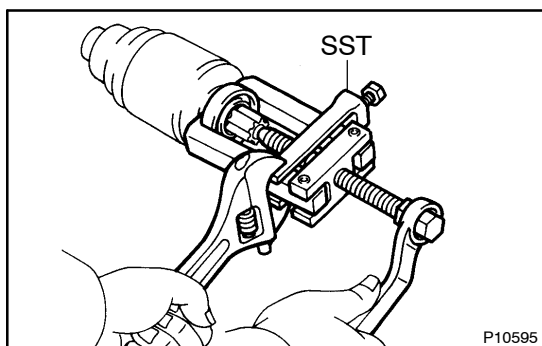

2. REPLACE REAR BEARING

- (a) Using SST, remove the bearing.
SST 09286-46011

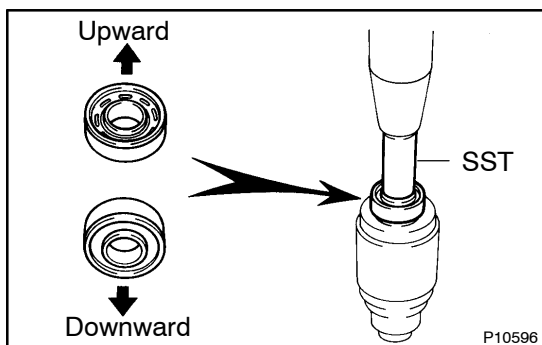


- (b) Using SST and a press, press in a new bearing.

NOTICE:


Be careful of the bearing installation direction.

SST 09820-00030

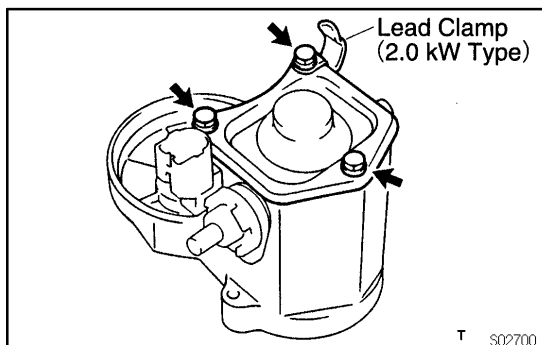

3. REPLACE MAGNETIC SWITCH TERMINAL KIT PARTS


- (a) Remove the 3 bolts, lead clamp (2.0 kW type), end cover, gasket and plunger.

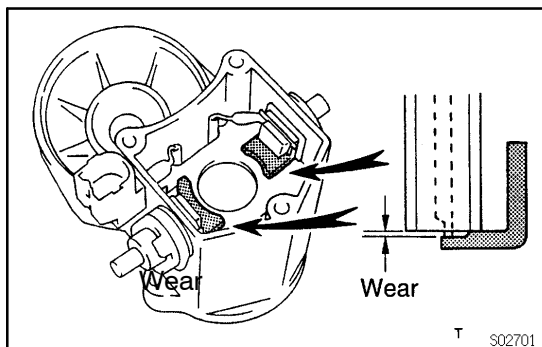


- (b) Using vernier calipers, measure the contact plate for depth of wear.

Maximum wear: 0.9 mm (0.035 in.)

If the depth of wear is greater than the maximum, replace the contact plate.

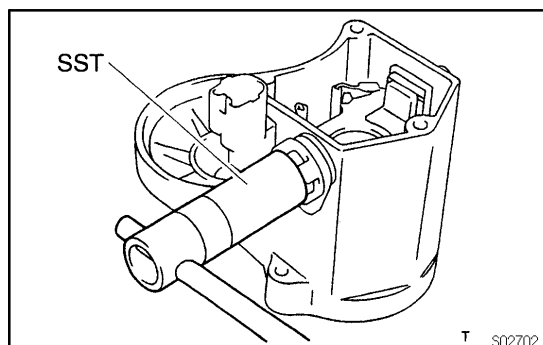

- (c) Remove the terminal kit parts.
- (1) Using SST, loosen the terminal nuts.
SST 09810-38140
 - (2) Terminal C:
Remove the terminal nut, wave washer, terminal insulator (outside), O-ring, terminal bolt, contact plate and terminal insulator (inside).
 - (3) Terminal 30:
Remove the terminal nut, wave washer, terminal insulator (outside), packing, O-ring, terminal bolt, contact plate, terminal insulator (inside) and insulation paper.

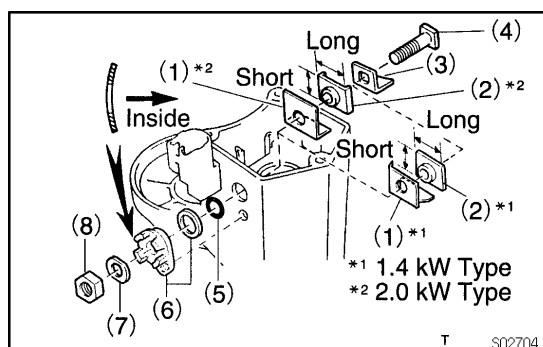

- (d) Temporarily install new terminal 30 kit parts:
- (1) Install a new insulation paper.
 - (2) Install a new terminal insulator (inside).

NOTICE:

Be careful to install the terminal insulator in the correct direction.

- (3) Install a new contact plate.
- (4) Install a new terminal bolt.
- (5) Install a new O-ring.
- (6) Install a new packing to a new terminal insulator (outside), and install them.

HINT:


Match the protrusion of the insulator with the indentation of the housing.

- (7) Install a new wave washer.

NOTICE:

Be careful to install the wave washer in the correct direction.

- (8) Install a new terminal nut.
Temporarily tighten the terminal nut.

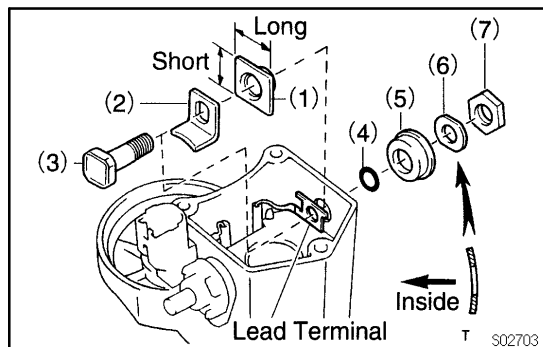

(e) Temporarily install new terminal C kit parts:

- (1) Install a new terminal insulator (inside).

NOTICE:


Be careful to install the terminal insulator in the correct direction.

- (2) Install a new contact plate.
- (3) Install a new terminal bolt.
- (4) Install a new O-ring.
- (5) Install a new terminal insulator (outside).
- (6) Install a new wave washer.

NOTICE:

Be careful to install the wave washer in the correct direction.

- (7) Install a new terminal nut.
Temporarily tighten the terminal nut.

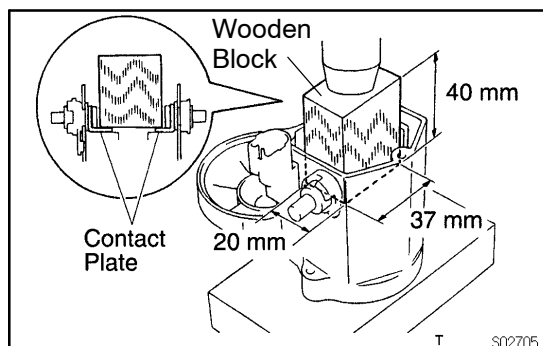

(f) Tighten the terminal nut.

- (1) Put a wooden block on the contact plate and press it down with a hand press.

Dimensions of wooden block:

20 x 37 x 40 mm (0.79 x 1.46 x 1.57 in.)

Press force: 981 N (100 kgf, 221 lbf)

NOTICE:

- Check the diameter of the hand press ram. Then calculate the gauge pressure of the press when 981 N (100 kgf, 221 lbf) of force is applied.

Gauge pressure:


$$(\text{kgf/cm}^2) = \frac{100 \text{ kgf}}{\left(\frac{\text{Ram diameter (cm)}}{2} \right)^2 \times 3.14 (\pi)}$$

$$(\text{psi}) = \frac{221 \text{ lbf}}{\left(\frac{\text{Ram diameter (in.)}}{2} \right)^2 \times 3.14 (\pi)}$$

$$(\text{kPa}) = (\text{kgf/cm}^2) \times 98.1$$

$$(\text{kPa}) = (\text{psi}) \times 6.9$$

- If the contact plate is not pressed down with the specified pressure, the contact plate may tilt due to coil deformation or the tightening of the nut.

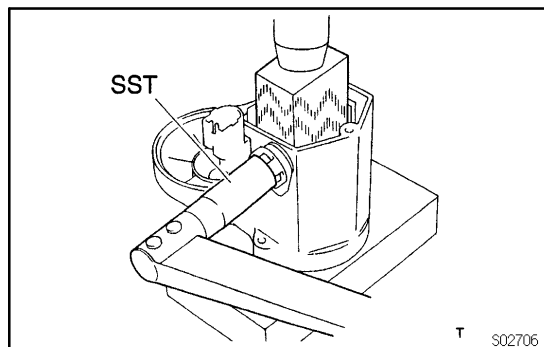


- (2) Using SST, tighten the nuts to the specified torque.
SST 09810-38140

Torque: 17 N·m (173 kgf·cm, 13 ft·lbf)

NOTICE:

If the nut is over tightened, it may cause cracks on the inside of the insulator.

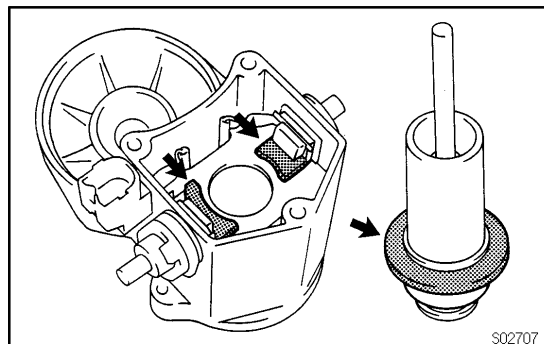

- (g) Clean the contact surfaces of the remaining contact plate and plunger with a dry shop rag.
(h) Reinstall the plunger, a new gasket, the end cover and lead clamp with the 3 bolts.

Torque:

2.5 N·m (25 kgf·cm, 22 in·lbf) for 1.4 kW type

3.6 N·m (37 kgf·cm, 32 in·lbf) for 2.0 kW type