
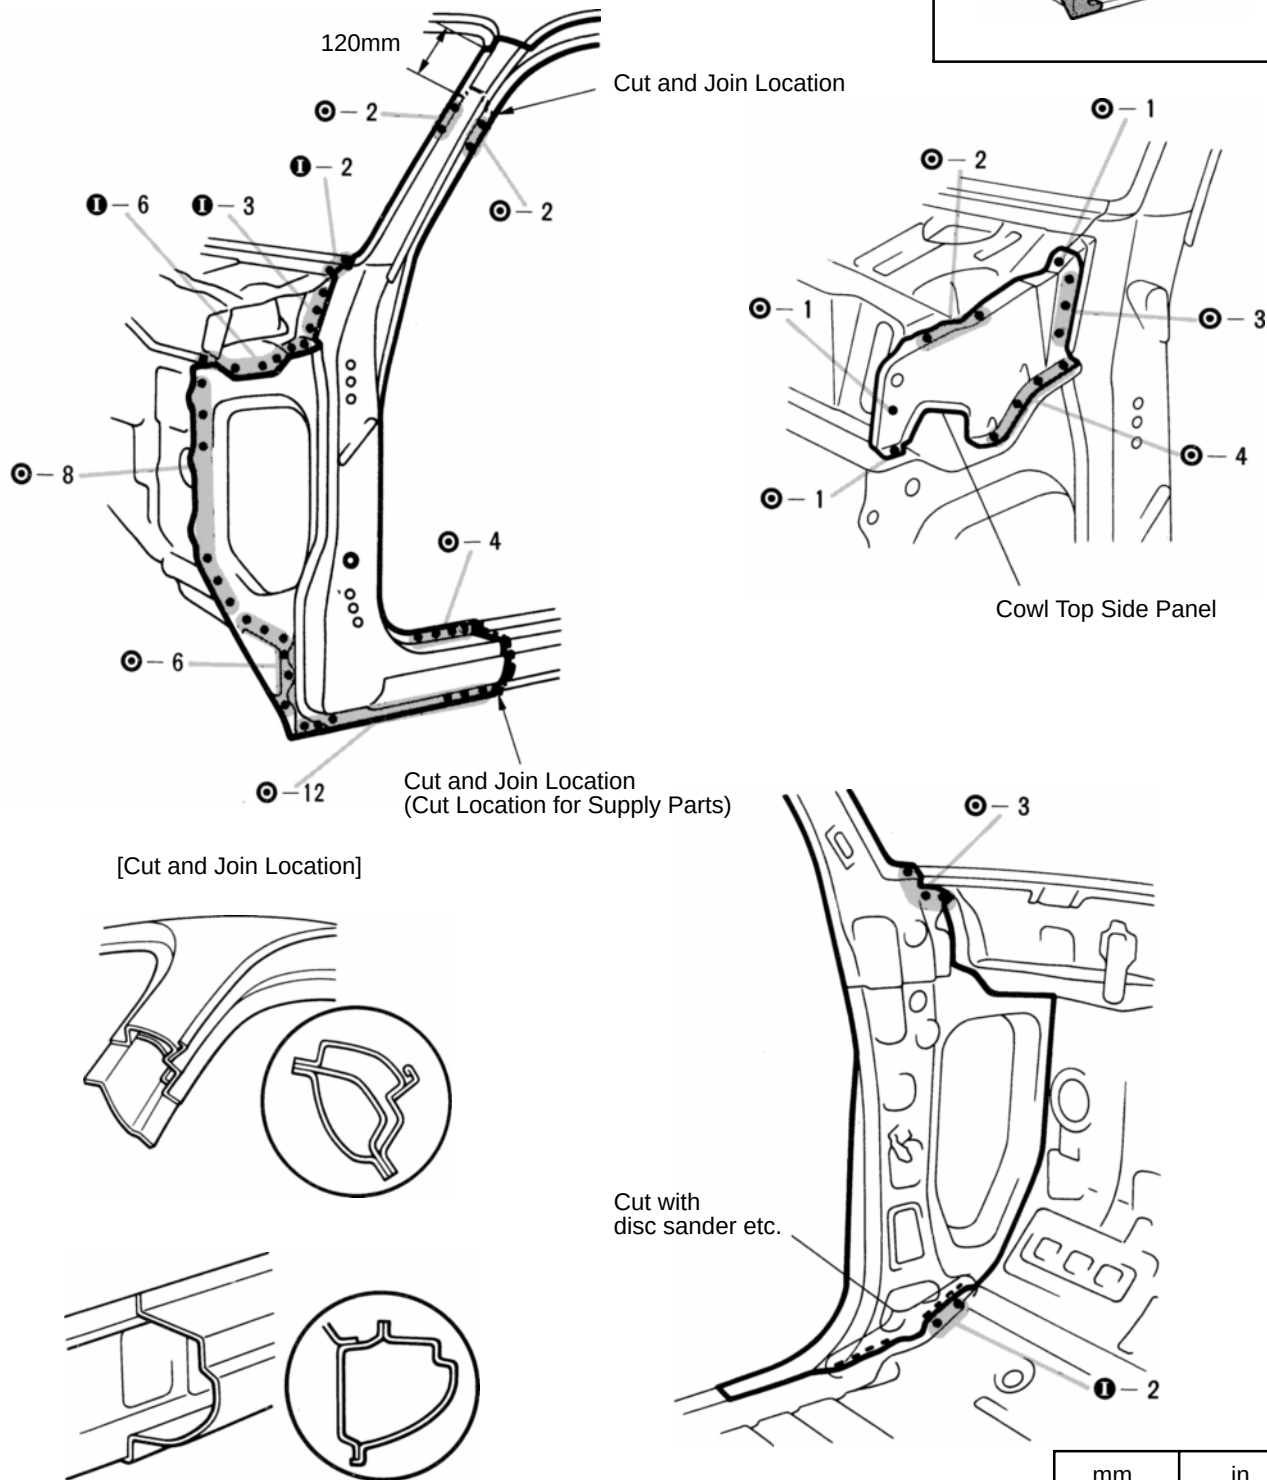




FRONT BODY PILLAR (CUT)

REMOVAL




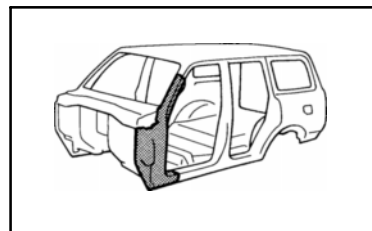


1. Cut and join the parts at the locations shown above.
2. After removing the cowl top side panel remove the front body pillar.

INSTALLATION (Continued on Next Page)

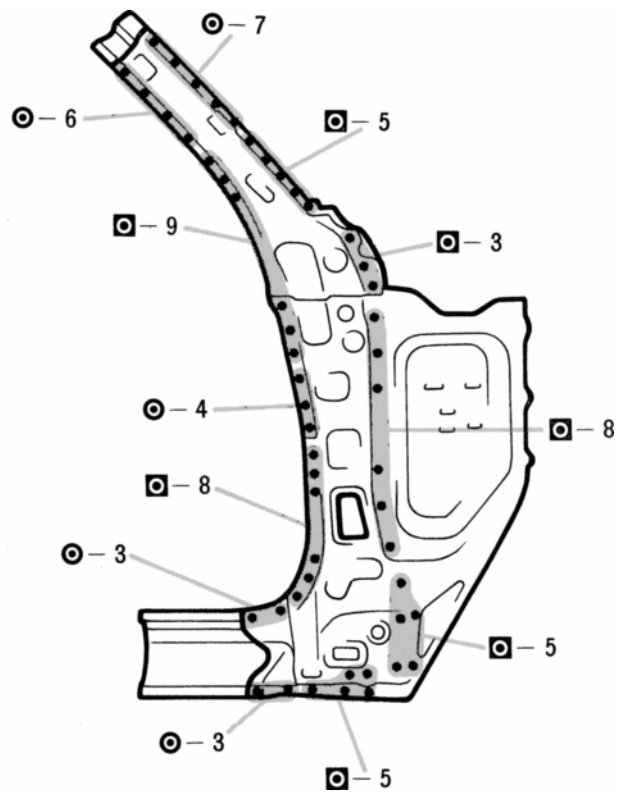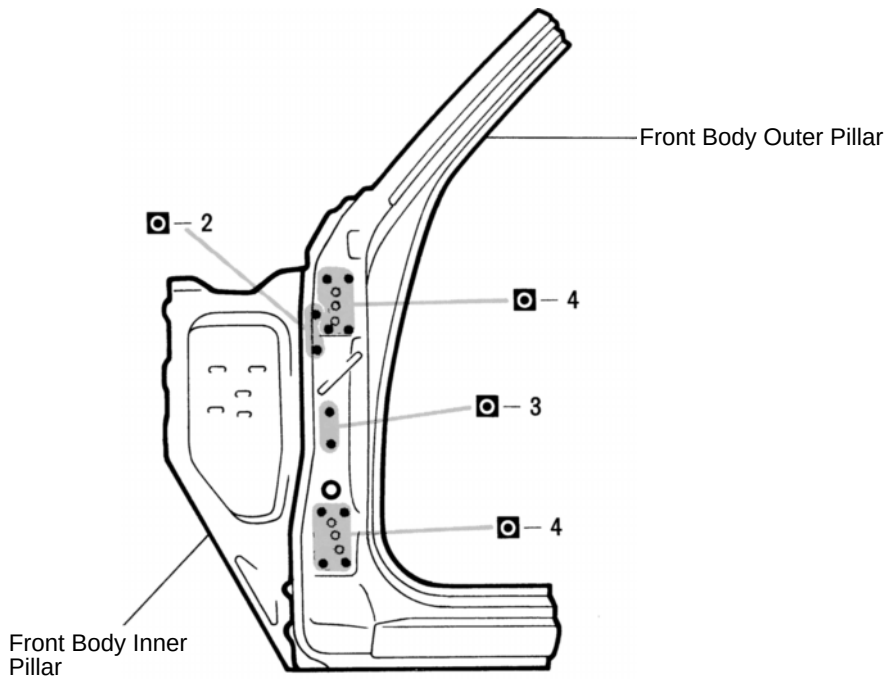

INSTALLATION (Cont'd)

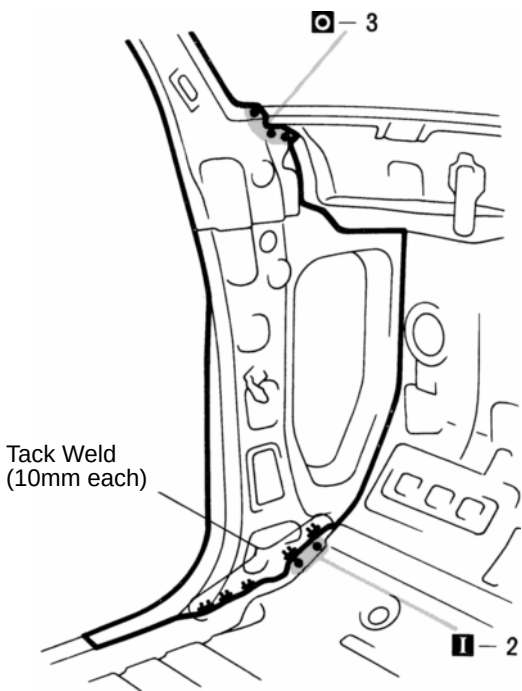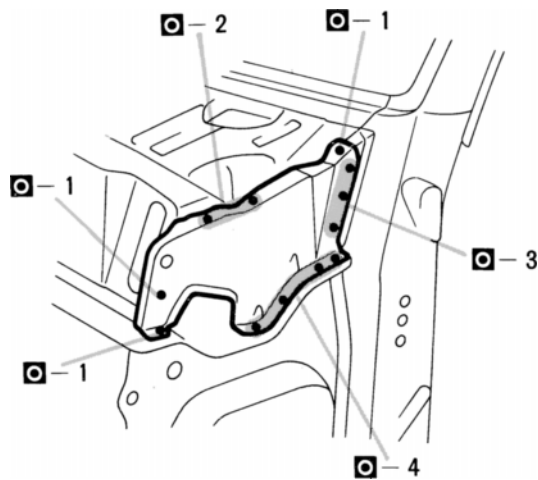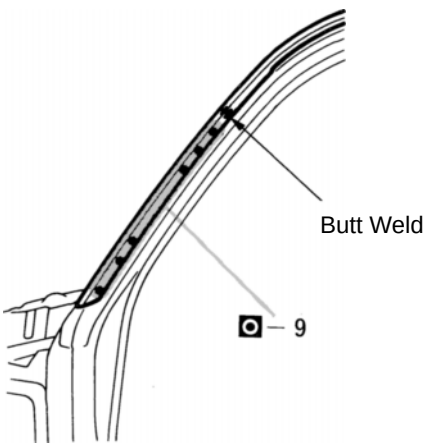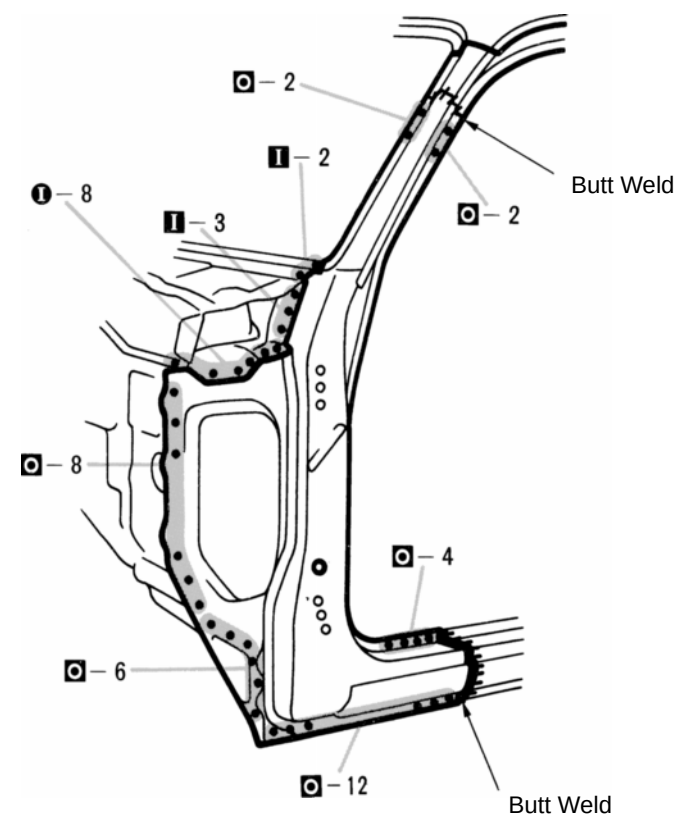

mm	in
10	0.39

