
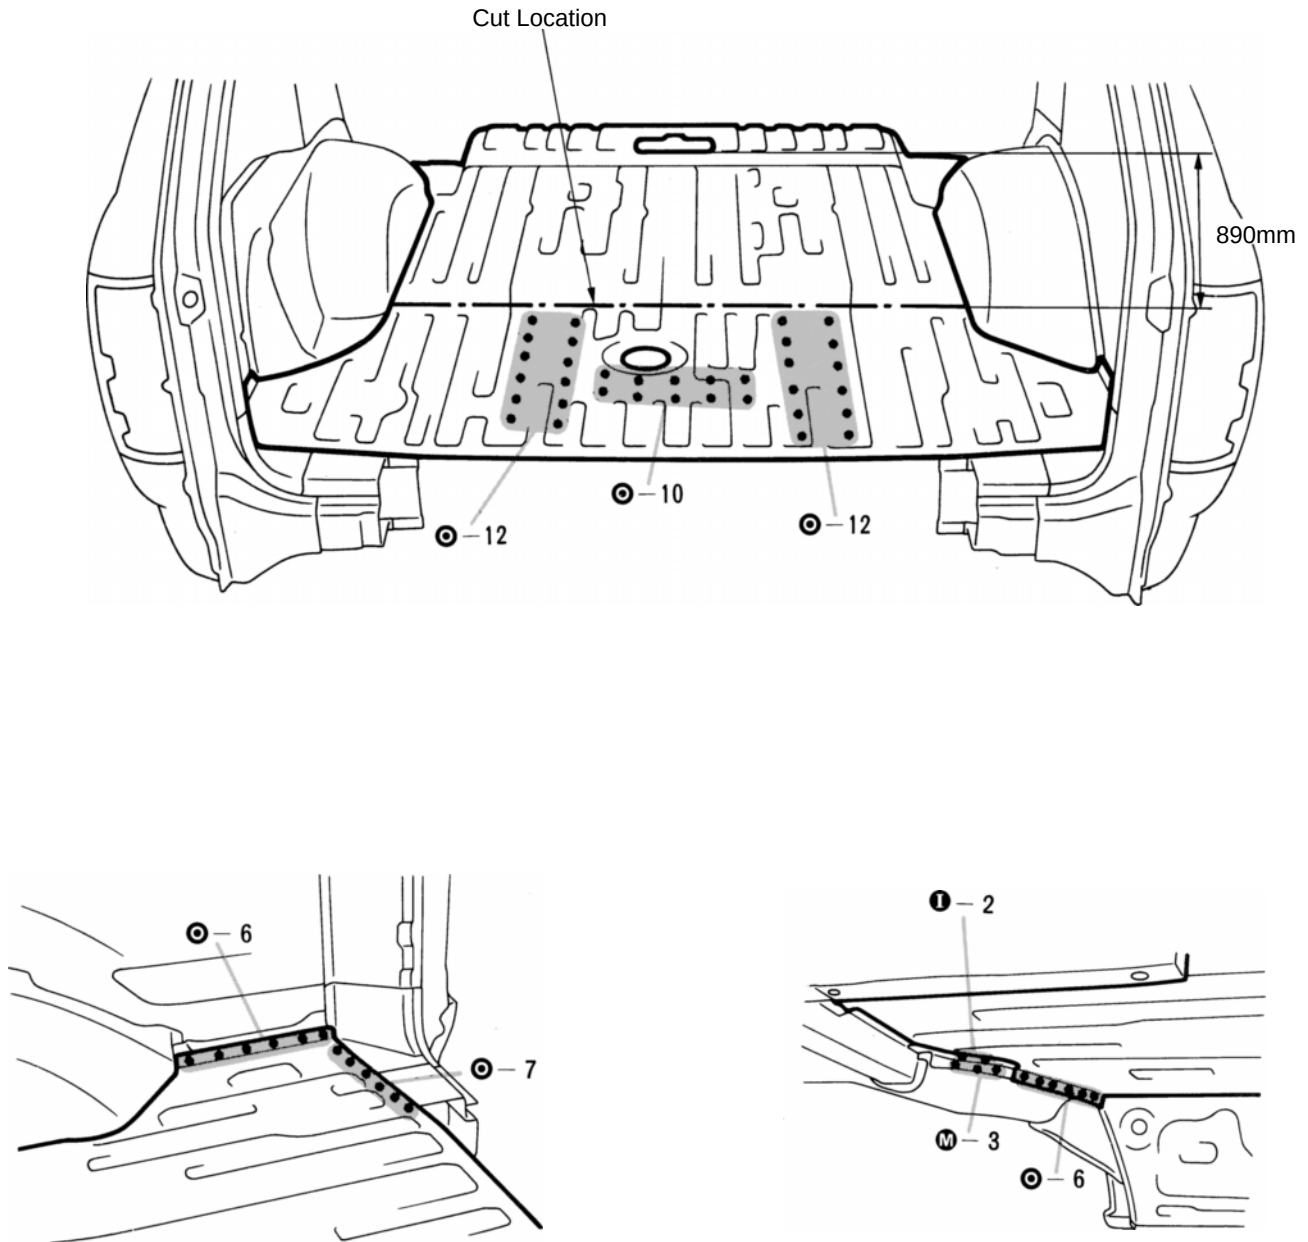


REAR FLOOR PAN (ASSY)





REMOVAL (With the rear floor inner corssmember removed.)

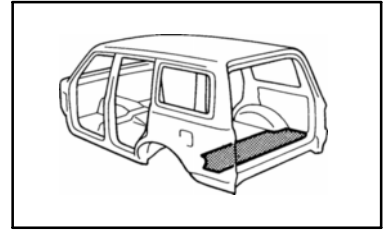

mm	in
890	35.04

1. Cut the parts at the location shown above.

INSTALLATION

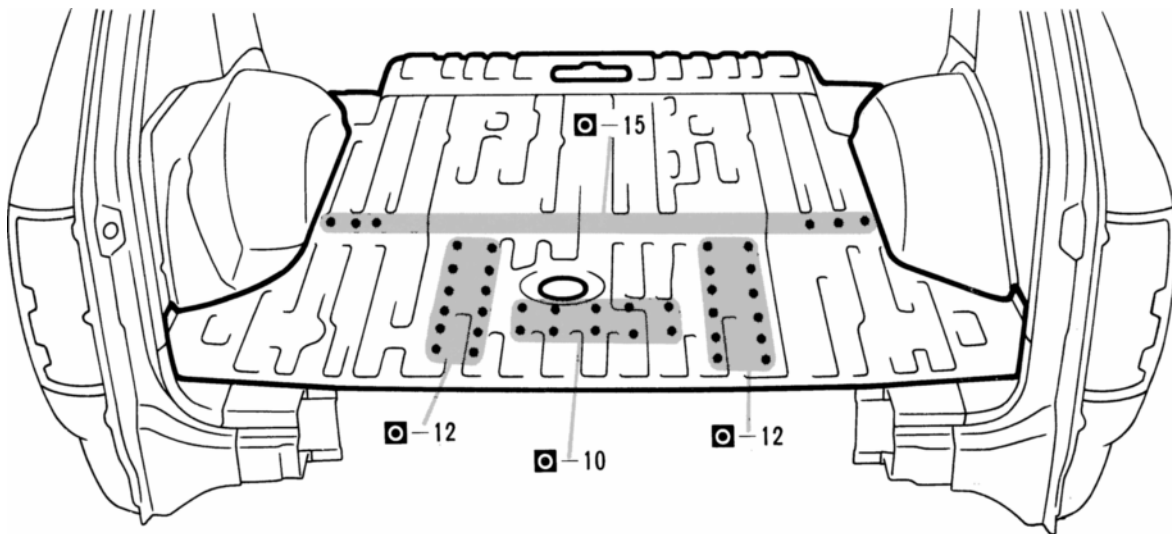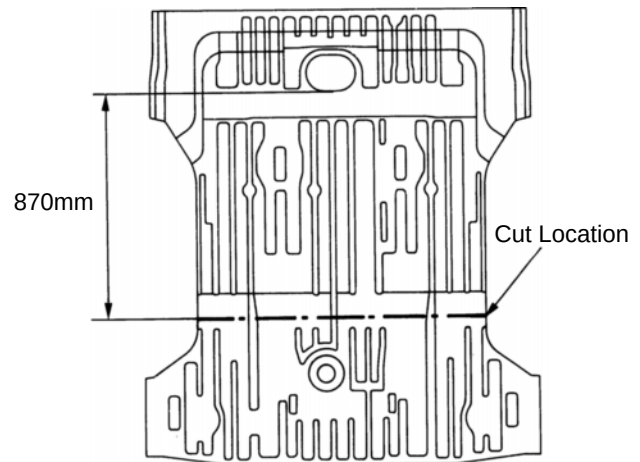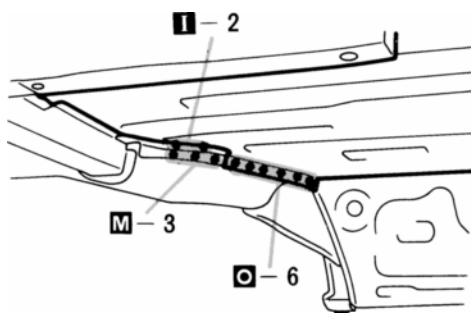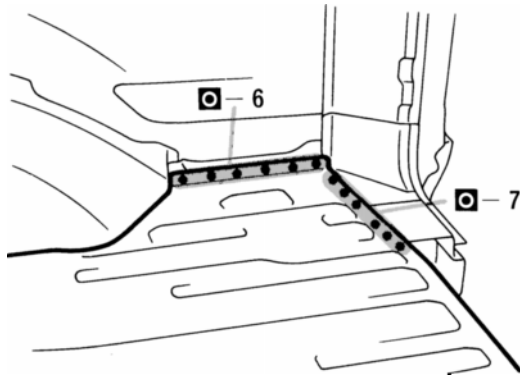

mm	in
870	34.25

1. Cut the new parts at the location shown above.
2. Plug weld the overlapping portion of the new parts.

HINT: Be sure the portion to be welded are align and not loose.

3. Coat the overlapping opening portion from the both sides with body sealer.