


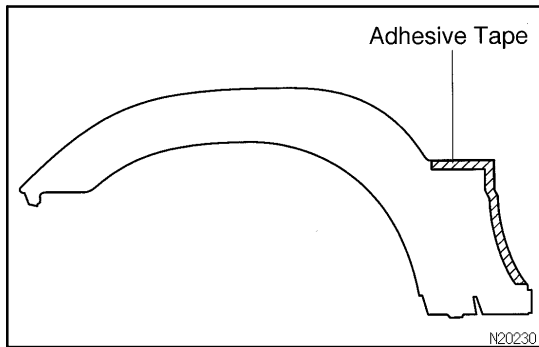


## INSTALLATION

### 1. INSTALL FRONT FENDER WHEEL OPENING MOULDING

- (a) Install the front fender wheel opening moulding.

HINT:

Install the front fender wheel opening moulding in the same way as the front door outside moulding.

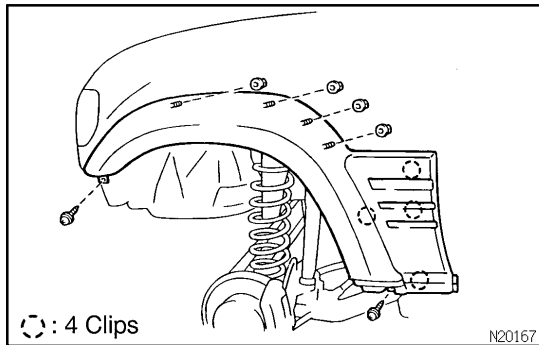

- (b) Install the 4 nuts from the service hole of the engine room inside.

- (c) Install the 2 screws.

### 2. INSTALL FRONT MUDGUARD

Install the mudguard and tighten the 3 screws.

### 3. INSTALL THESE PARTS:

- (a) Front bumper extension
- (b) Front wheel
- (c) Cool air intake duct
- (d) Air cleaner case assembly
- (e) Charcoal canister