



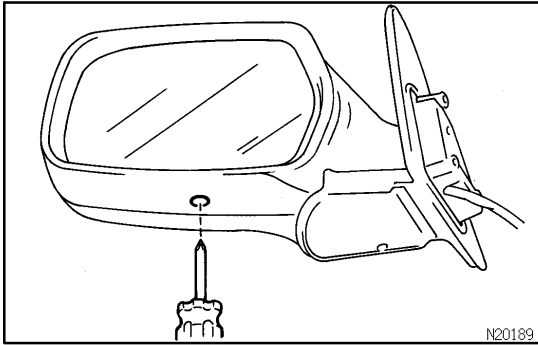


REPLACEMENT

1. IF NECESSARY, DISCONNECT MIRROR

(a) Remove a screw.

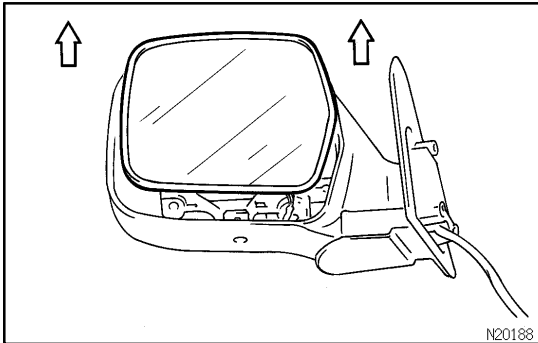


(b) Slide the mirror upward to remove it.

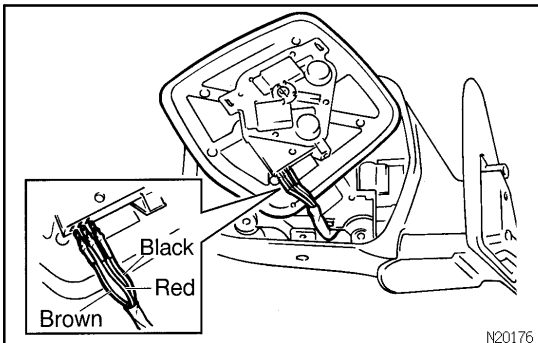

(c) Disconnect the 3 connectors.

NOTICE:

At the time of installation, install the connectors correctly.

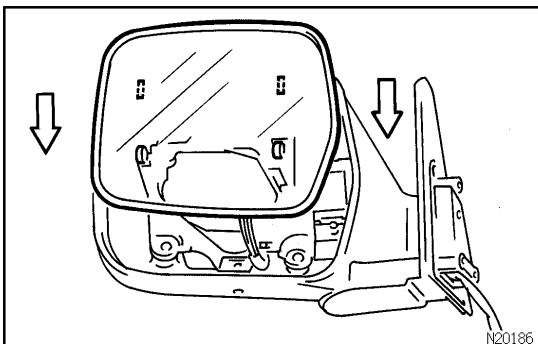

2. CONNECT MIRROR

(a) Connect the claws and set the mirror to the mirror body.

(b) Tighten the screw.