
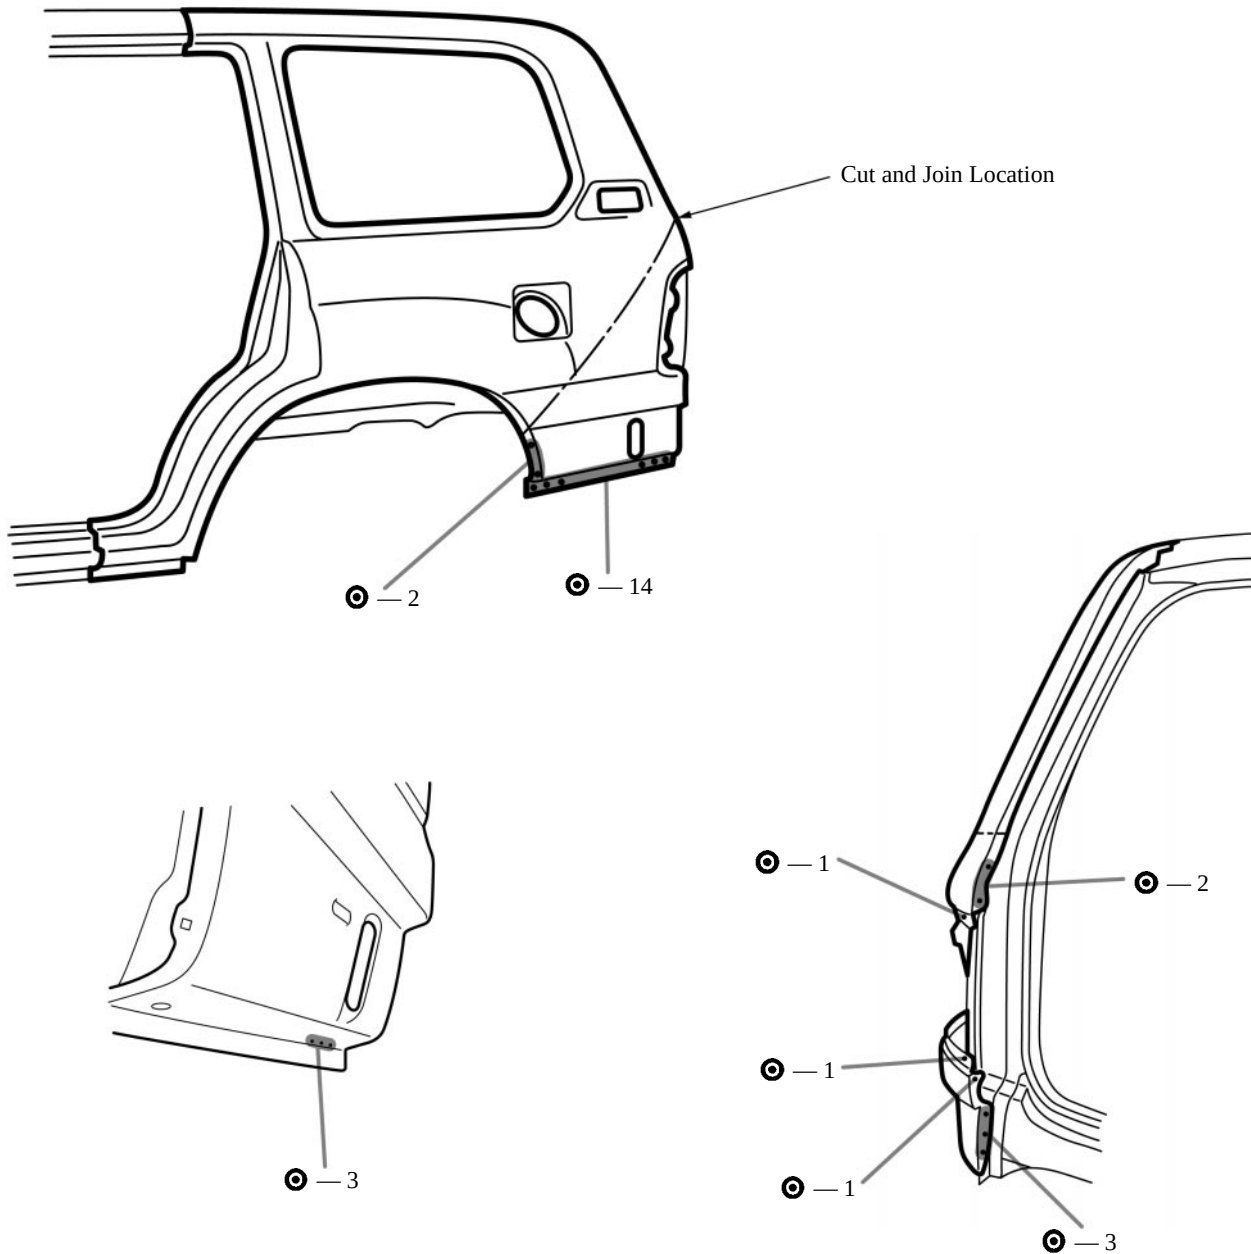
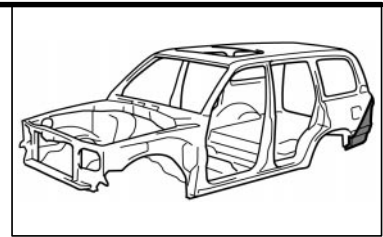
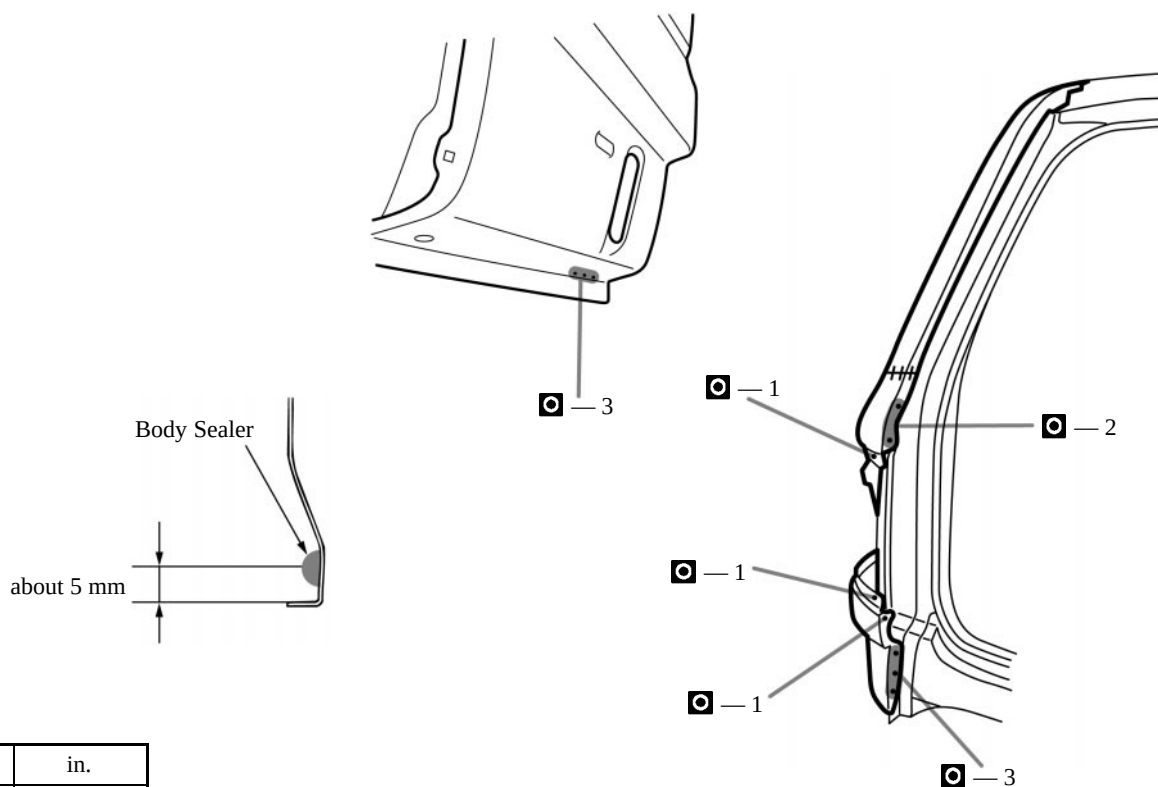


QUARTER PANEL (CUT-P)**REMOVAL**

1. Cut and join the parts at the location as shown above.

INSTALLATION

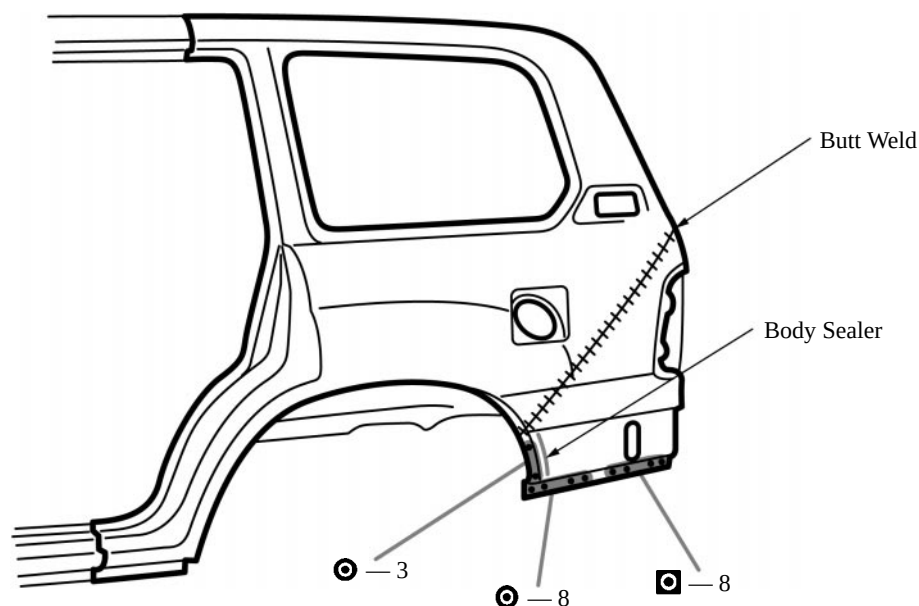

mm	in.
5	0.20

1. Before temporarily installing the new parts, apply body sealer to the wheel arch.
2. Temporarily install the new parts and check the fit of the tail gate and rear combination light.

HINT:

- 1) Apply body sealer about 5 mm (0.20 in.) from the flange, avoiding any oozing.
- 2) Apply sealer evenly, about 3 - 4 mm (0.12 - 0.16 in.) in diameter.
- 3) For other sealing points, refer to section AR.