



BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS

HINT:


1. Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.
2. Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.
3. Wipe off the anti-rust agent immediately with a rag soaked in a grease, wax and silicone remover, if accidentally applied to other areas.




Back Door Hinge




Tail Gate Hinge

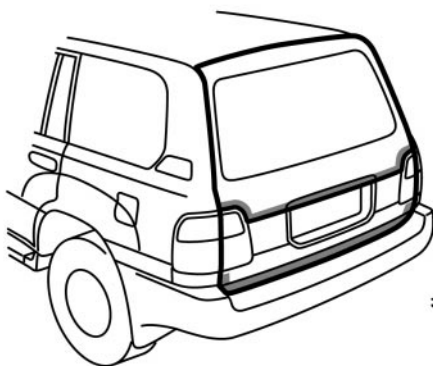


Back Door, Tail Gate

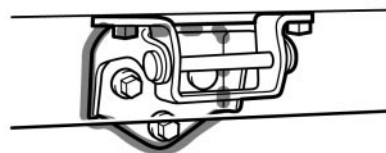

Tail Gate Hinge

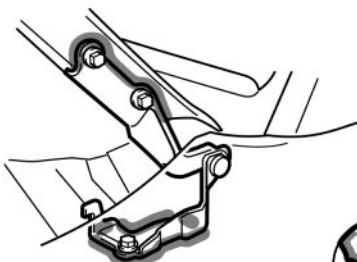


Hood Hinge

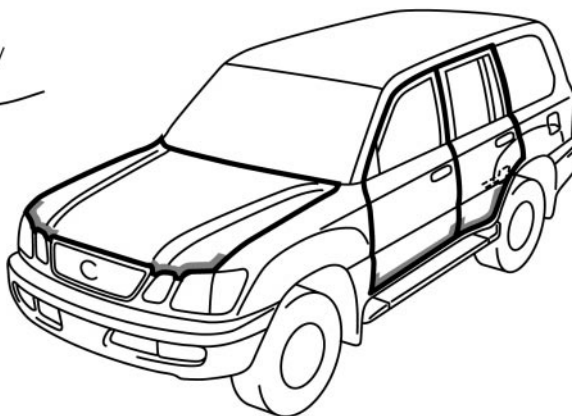


Door



Hood

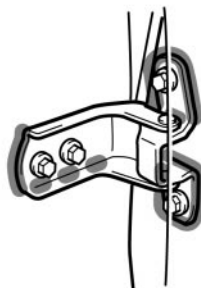

Door Hinge

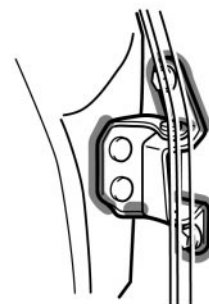

Door Hinge