


## INSTALLATION

### 1. REASSEMBLY BRAKE PEDAL

- (a) Install the pedal pad.
- (b) Install the stop light switch cushion.
- (c) Temporarily install the stop light switch to the pedal bracket.
- (d) Install the return spring with cushion and pedal pad.

#### HINT:

Apply MP grease to the parts indicates by arrow (See page [BR-11](#)).

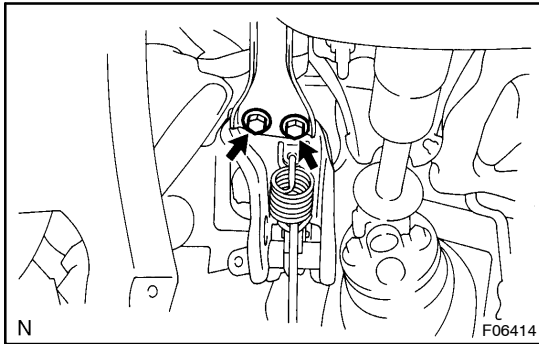

### 2. INSTALL BRAKE PEDAL ASSEMBLY

Install the brake pedal assembly and temporarily fasten the 2 bolts.

### 3. INSTALL HYDRAULIC BRAKE BOOSTER

(See page [BR-58](#))

### 4. TIGHTEN 2 BOLTS OF BRAKE PEDAL BRACKET

Torque: 20 N·m (200 kgf·cm, 14 ft·lbf)

### 5. AFTER INSTALLATION, FILL BRAKE RESERVOIR WITH BRAKE FLUID AND BLEED BRAKE SYSTEM (See page [BR-4](#))

### 6. CHECK FOR LEAKS

### 7. CHECK AND ADJUST BRAKE PEDAL

(See page [BR-9](#))