


DTC	37, 47	Rear Air Mix Damper Position Sensor Circuit
-----	--------	---


CIRCUIT DESCRIPTION

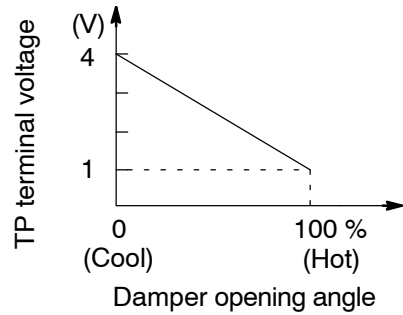

This sensor detects the position of the rear air mix damper and sends the appropriate signals to the rear A/C amplifier. The position sensor is built into the rear air mix servomotor.

DTC No.	Detection Item	Trouble Area
37	Short to ground or to power source circuit in rear air mix damper position sensor circuit	• Rear air mix damper position sensor • Harness or connector between rear air mix damper position sensor and A/C amplifier • A/C amplifier
47	Rear air mix damper position sensor value does not change even if A/C amplifier operates rear air mix damper control servomotor	


WIRING DIAGRAM

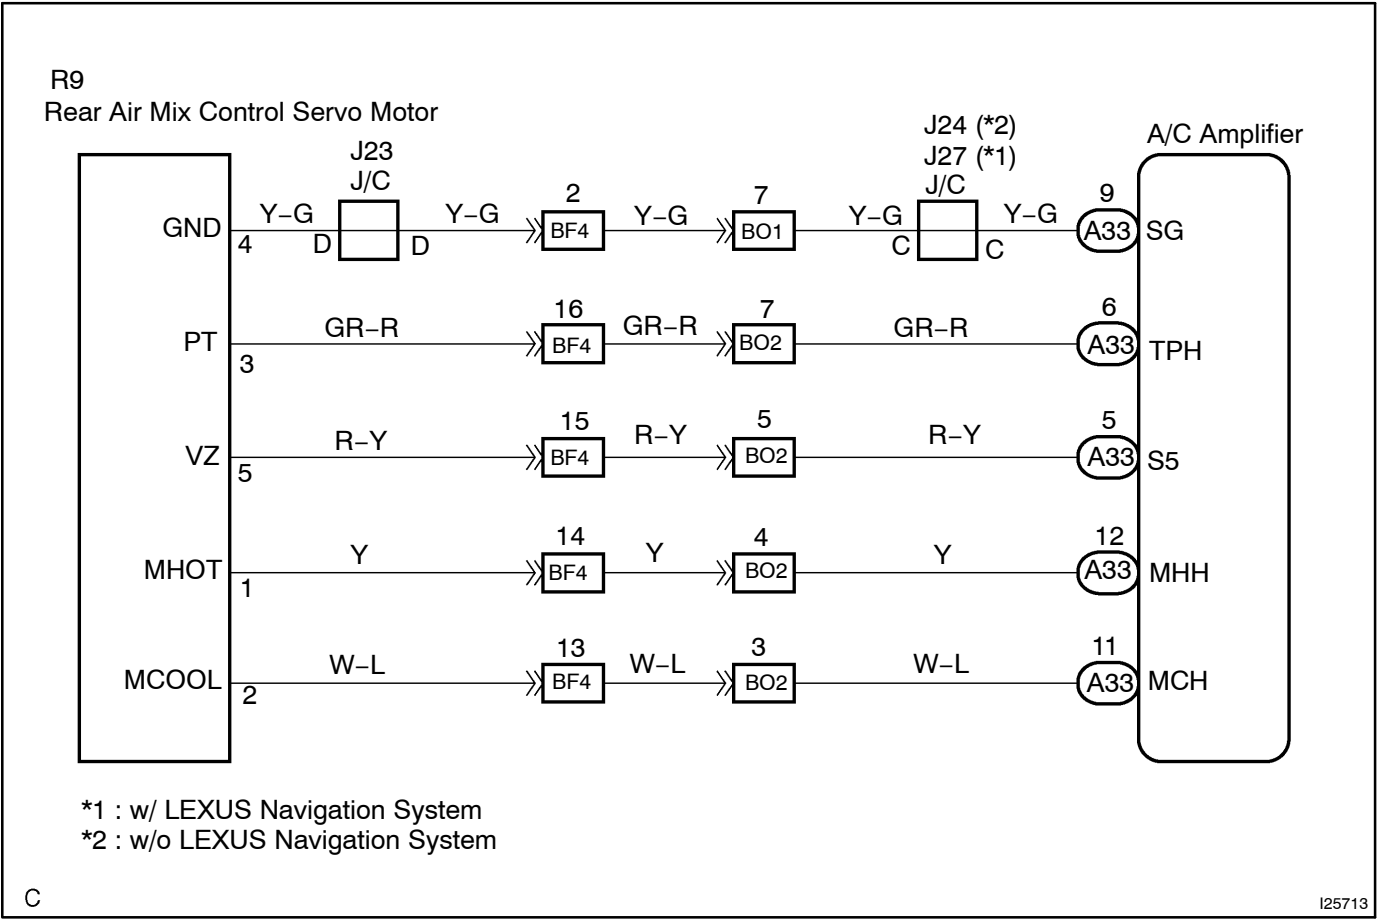

INSPECTION PROCEDURE

1

Check voltage between terminals TPH and SG of A/C amplifier.

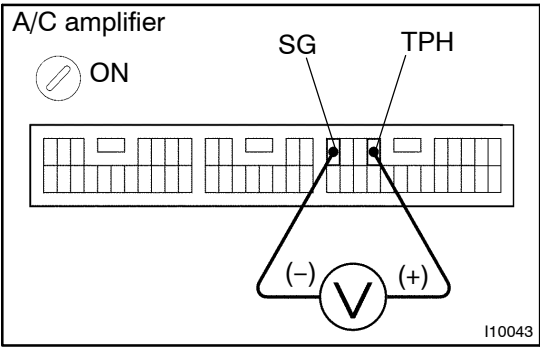

- PREPARATION:**
Remove A/C amplifier with connectors still connected.
- CHECK:**
- (a) Turn ignition switch to ON.
 - (b) Change the set temperature to activate the rear air mix servomotor, and measure the voltage between terminals TPH and SG of A/C amplifier connector each time when the set temperature is changed.

OK:

Set Temperature	Voltage
Max. cool	3.5 – 4.5 V
Max. hot	0.5 – 1.5 V

HINT:
As the set temperature increases, the voltage decreases.


NG

Go to step 2.

Ok

Proceed to next circuit inspection shown on problem symptoms table (See page [DI-1722](#)). However, if DTC 37 or 47 is displayed, check and replace A/C amplifier.

2 Check rear air mix damper position sensor.

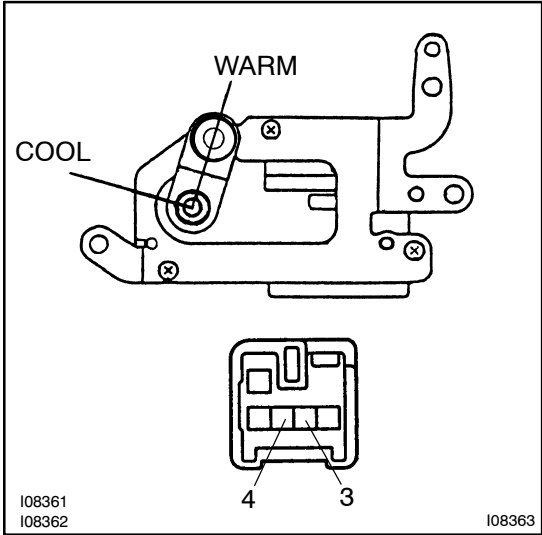

PREPARATION:

Remove rear air mix servomotor (See page [AC-49](#)).

CHECK:

Measure resistance between terminals 3 and 4 of rear air mix damper control servomotor connector.

OK:

Resistance : 4.2 – 7.8 kΩ

CHECK:

While operating rear air mix damper control servomotor, follow the procedure on page [DI-1778](#) and measure resistance between terminals 3 and 4 of rear air mix servomotor connector.

OK:

Position	Resistance
Max. COOL	3.6 – 6.8 kΩ
Max. WARM	0.5 – 1.1 kΩ

HINT:

As the rear air mix servomotor moves from cool side to warm side, the resistance decreases.

NG

Replace rear air mix servomotor.

OK

3 Check harness and connector between rear air mix damper position sensor and A/C amplifier (See page [IN-36](#)).

NG

Repair or replace harness or connector.

OK

Check and replace A/C amplifier.