


BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three-Dimensional Distance)

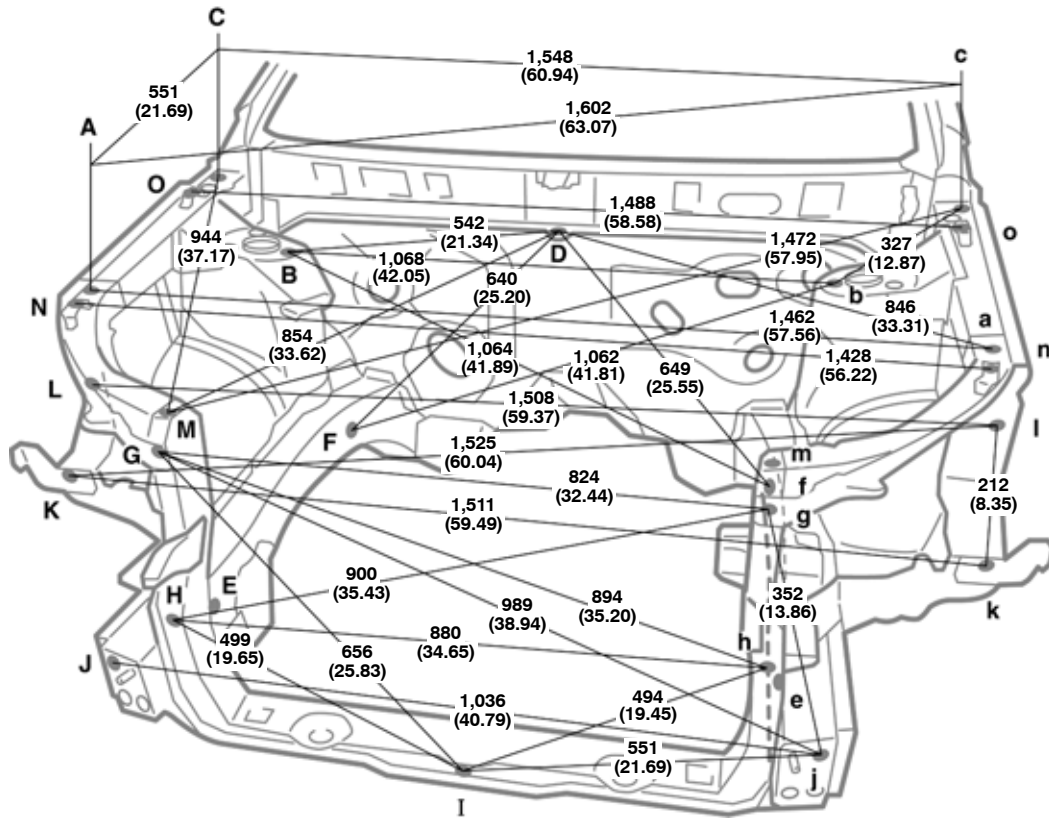

Vehicle Dimensions

B-c or b-C	D-E	D-e	M-m	N-o or n-O	N-O or n-o
1,326 (52.20)	948 (37.32)	945 (37.20)	824 (32.44)	1,532 (60.31)	473 (18.62)

Height from Imaginary Standard Line


A, a	C, c	M, m
787 (30.98)	850 (33.46)	738 (29.06)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Radiator upper support standard hole	10 (0.39)	I	Hood lock support installation nut	M6 (0.24)
B, b	Front spring support hole-inner	11 (0.43)	J, j	Front bumper reinforcement installation nut	M10 (0.39)
C, c	Hood hinge installation nut	M8 (0.31)	K, k	Radiator support to front fender bracket standard hole	6 (0.24)
D	Cowl top outer panel standard hole	10 (0.39)	L, l	Radiator support apron brace standard hole	13 (0.51)
E, e	Front side member standard hole	18 (0.71)	M, m	Radiator upper support installation nut	M6 (0.24)
F, f	Front side member standard hole	RH: 18 (0.71) LH: 13 (0.51)	N, n	Front fender installation nut	M6 (0.24)
G, g	Radiator upper support installation nut	M6 (0.24)	O, o	Front fender installation nut	M6 (0.24)
H, h	Radiator side deflector installation hole	7 (0.28)	—	—	—

BODY OPENING AREAS (Side View: Front)

(Three-Dimensional Distance)

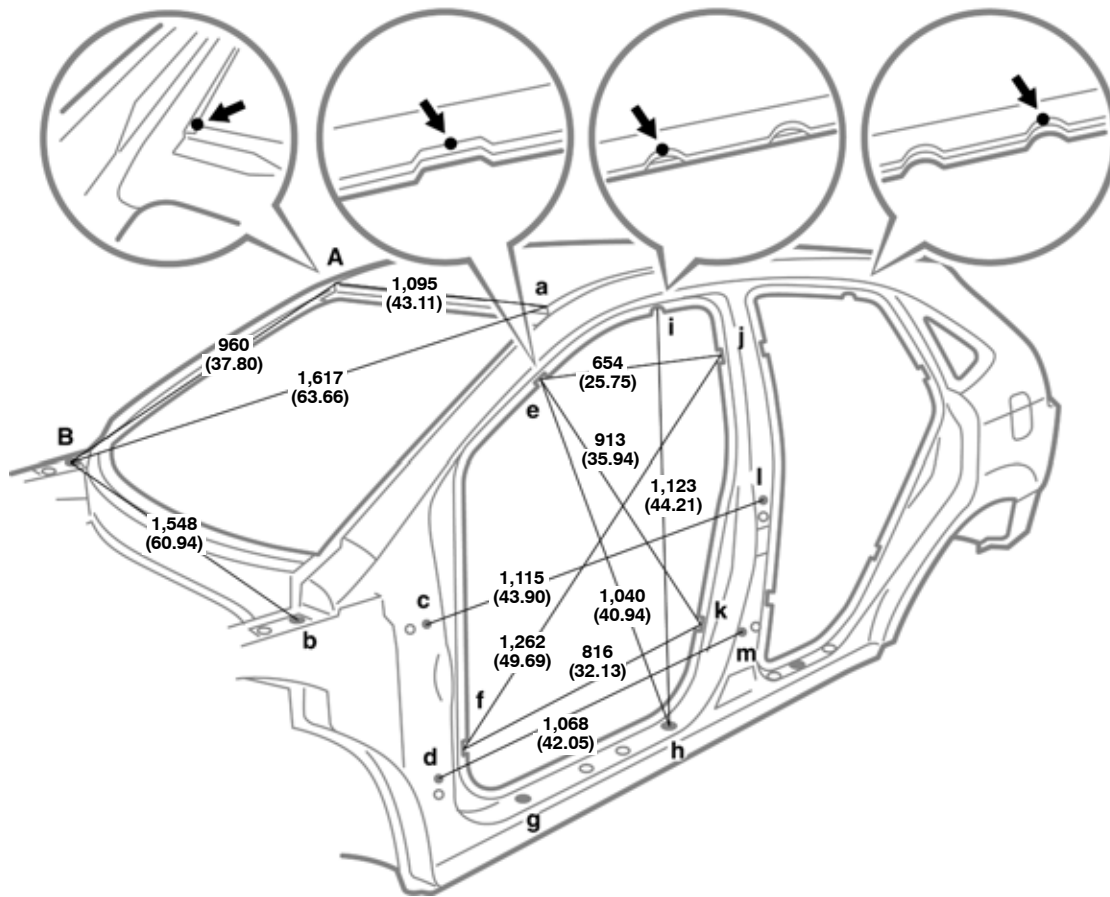

Vehicle Dimensions Left ↔ Right


E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,295 (50.98)	1,502 (59.13)	1,569 (61.77)	1,569 (61.77)	1,184 (46.61)	1,322 (52.05)	1,502 (59.13)
E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	H-i or h-I	J-k or j-K
1,643 (64.69)	1,765 (69.49)	1,463 (57.60)	1,892 (74.49)	1,709 (67.28)	1,766 (69.53)	1,610 (63.39)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	H, h	Front door scuff outside plate installation hole	8.5 (0.335)
B, b	Hood hinge installation nut-rear	M8 (0.31)	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	J, j	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	K, k	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Rear door hinge installation nut	M8 (0.31)
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	M8 (0.31)
G, g	Front door scuff outside plate installation hole	8.5 (0.335)	—	—	—

BODY OPENING AREAS (Side View: Rear)

(Three-Dimensional Distance)

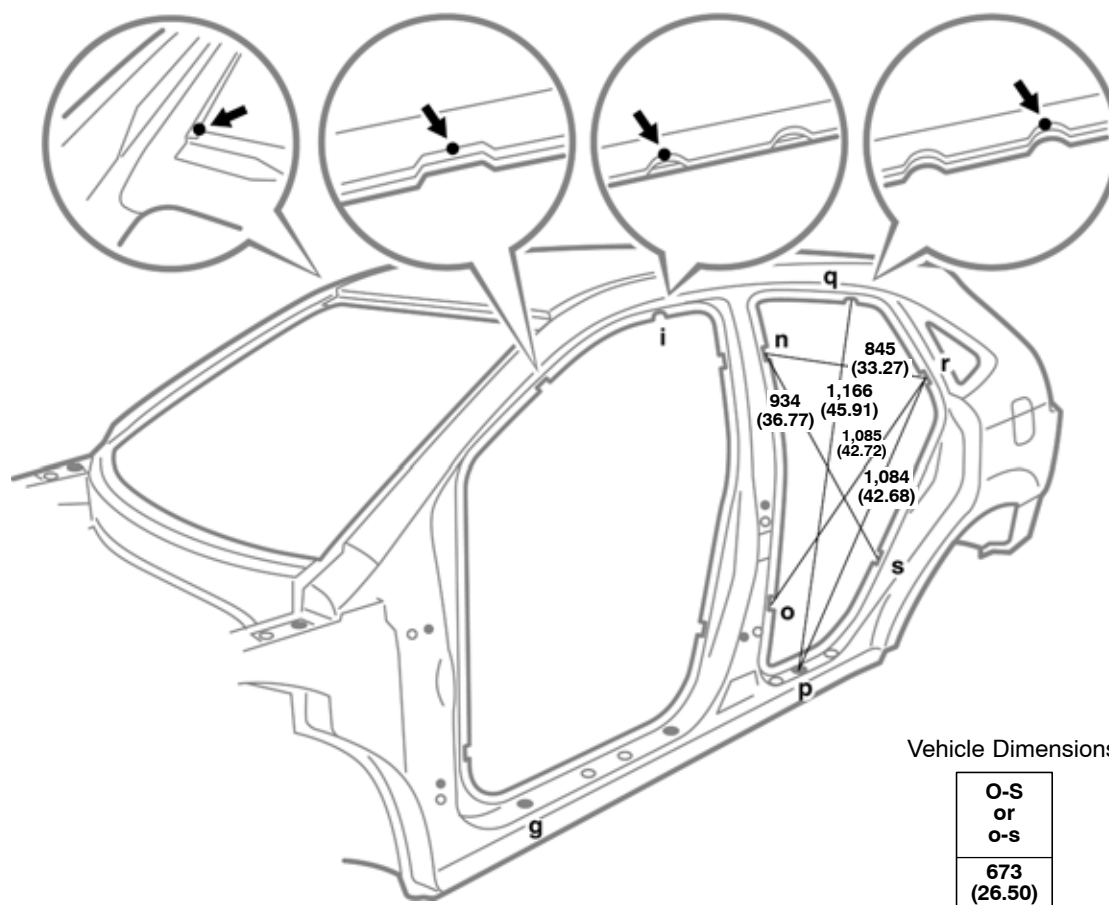

Vehicle Dimensions Left ↔ Right

N-n	O-o	P-p	Q-q	R-r	S-s
1,324 (52.13)	1,502 (59.13)	1,569 (61.77)	1,204 (47.40)	1,441 (56.73)	1,507 (59.33)


G-p or g-P	I-q or i-Q	N-r or n-R	N-s or n-S	O-s or o-S	P-q or p-Q	R-s or r-S
1,908 (75.12)	1,423 (56.02)	1,620 (63.78)	1,694 (66.69)	1,648 (64.88)	1,802 (70.94)	1,592 (62.68)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Front door scuff outside plate installation hole	8.5 (0.335)	P, p	Rear door scuff outside plate installation hole	8.5 (0.335)
I, i	Roof side rail assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	S, s	Quarter panel assembly mark	—

BODY OPENING AREAS (Rear View)

(Three-Dimensional Distance)

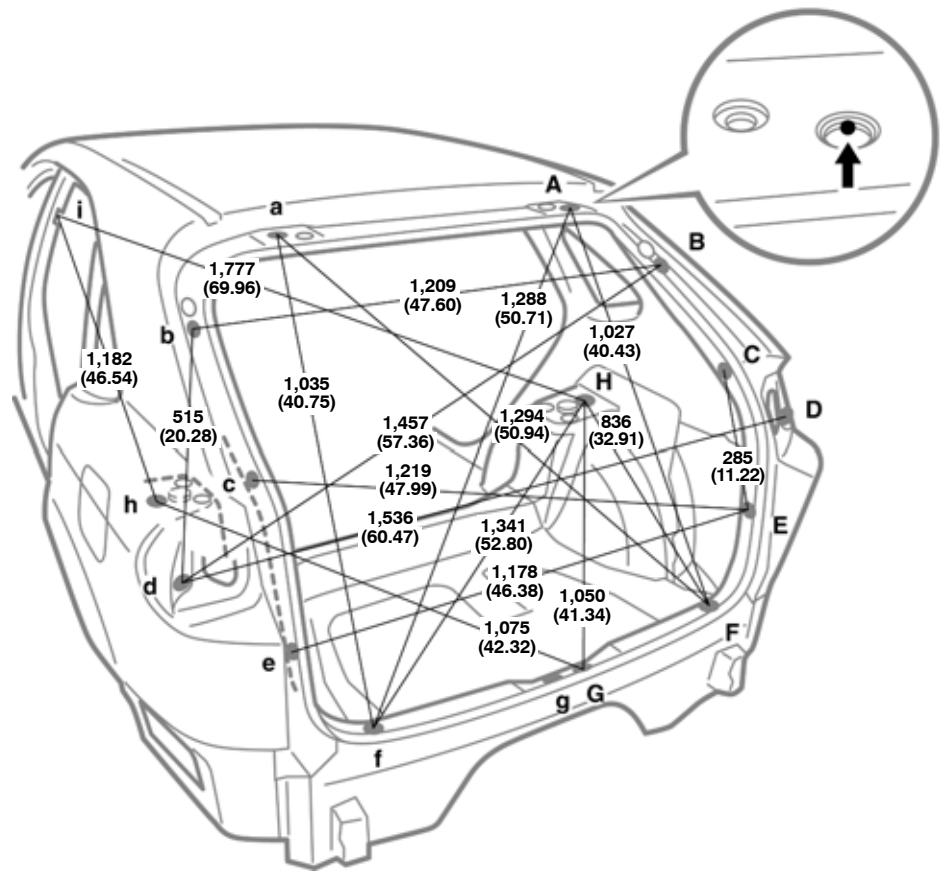

Vehicle Dimensions Left ↔ Right

A-G	A-g	a-G	a-g	C-c	H-h
1,117 (43.98)	1,130 (44.49)	1,138 (44.80)	1,125 (44.29)	1,192 (46.93)	1,330 (52.36)

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole-outer	13 (0.51)	F, f	Rear floor finish plate installation hole	8.5 (0.335)
B, b	Back door damper stay installation nut	M6 (0.24)	G, g	Back door lock striker installation nut	M8 (0.31)
C, c	Roof side inner panel standard hole	10 (0.39)	H, h	Rear spring support hole outer	12.5 (0.492)
D, d	Quarter panel standard hole	13 (0.51)	I, i	Center body pillar assembly mark	—
E, e	Rear floor finish side plate installation hole	8.5 (0.335)	—	—	—

UNDER BODY 2WD

(Three-Dimensional Distance)


Vehicle Dimensions

F-H or f-h	G-i or g-i	I-K or i-k
294 (11.57)	1,251 (49.25)	999 (39.33)

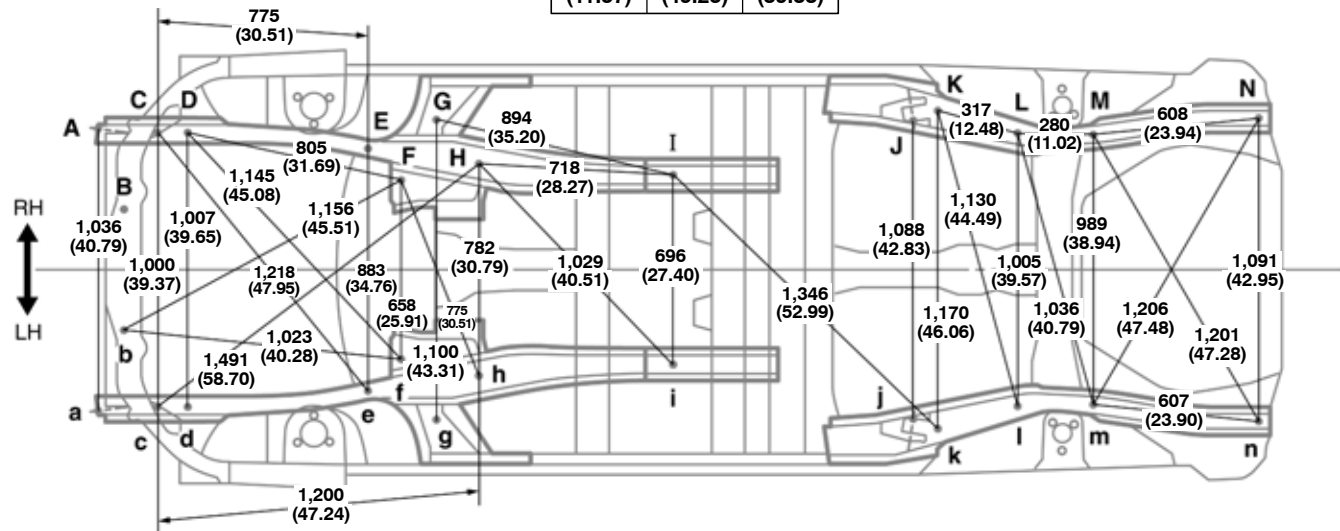

Front ←

1	2	3
99 (3.90)	100 (3.94)	100 (3.94)

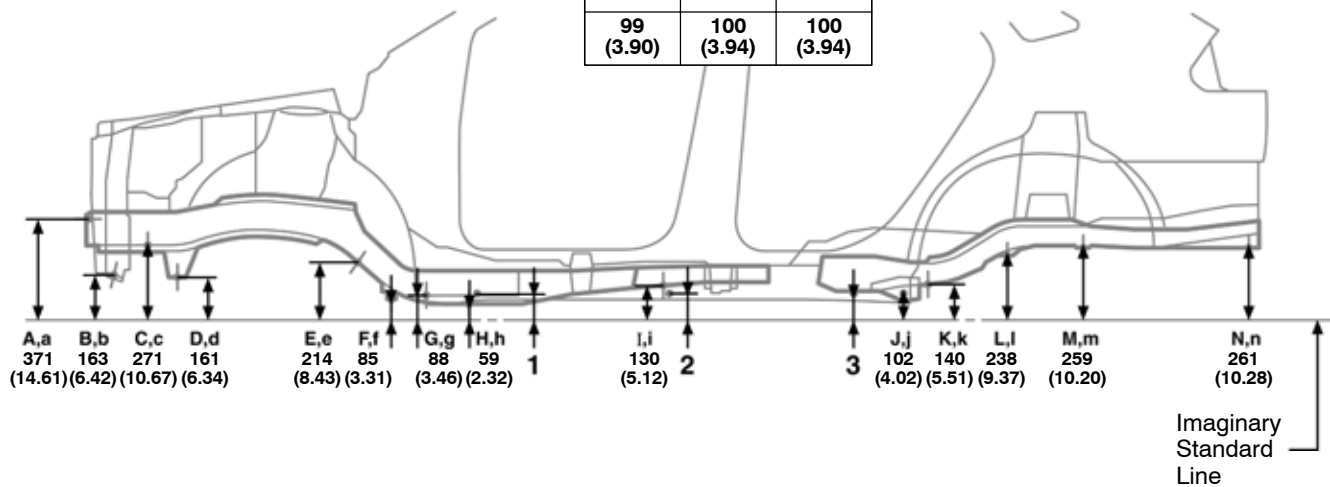

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	M10 (0.39)	H, h	Front side member standard hole	25 (0.98)
B, b	Front crossmember lower standard hole	15 (0.59)	I, i	Front floor under reinforcement standard hole	18 (0.71)
C, c	Front side member standard hole	18 (0.71)	J, j	Rear strut bar installation hole inner	12 (0.47)
D, d	Front frame installation nut	M16 (0.63)	K, k	Rear floor side member standard hole	18 (0.71)
E, e	Front side member standard hole	10 (0.39)	L, l	Rear suspension member installation nut	M12 (0.47)
F, f	Front frame installation nut	M16 (0.63)	M, m	Rear suspension member installation nut	M12 (0.47)
G, g	Torque box front standard hole	25 (0.98)	N, n	Transport hook installation nut	M10 (0.39)

UNDER BODY 4WD

(Three-Dimensional Distance)


Vehicle Dimensions

F-H or f-h	G-i or g-i	I-K or i-k
294 (11.57)	1,251 (49.25)	999 (39.33)

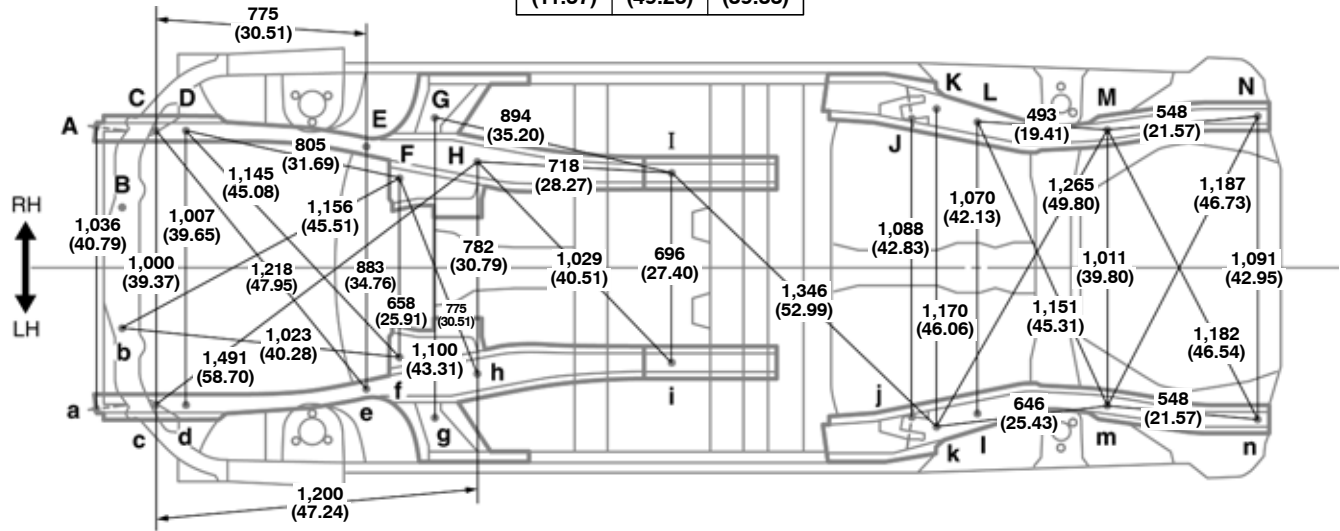

Front ←

1	2	3
99 (3.90)	100 (3.94)	100 (3.94)


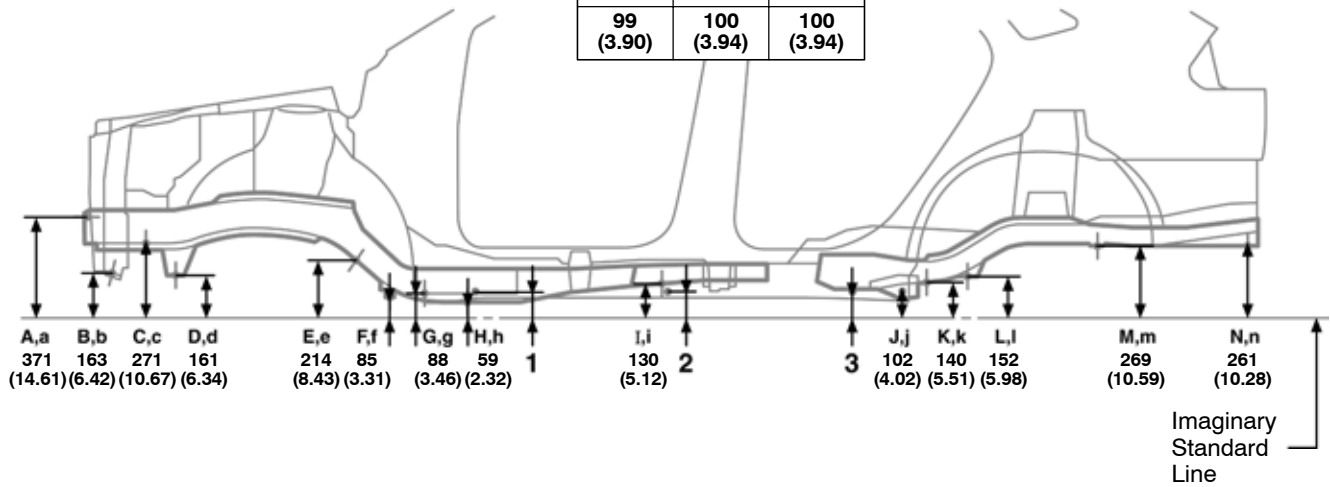


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	M10 (0.39)	H, h	Front side member standard hole	25 (0.98)
B, b	Front crossmember lower standard hole	15 (0.59)	I, i	Front floor under reinforcement standard hole	18 (0.71)
C, c	Front side member standard hole	18 (0.71)	J, j	Rear strut bar installation hole inner	12 (0.47)
D, d	Front frame installation nut	M16 (0.63)	K, k	Rear floor side member standard hole	18 (0.71)
E, e	Front side member standard hole	10 (0.39)	L, l	Rear suspension member installation nut	M14 (0.55)
F, f	Front frame installation nut	M16 (0.63)	M, m	Rear suspension member installation nut	M10 (0.39)
G, g	Torque box front standard hole	25 (0.98)	N, n	Transport hook installation nut	M10 (0.39)

UNDER BODY 2WD

(Two-Dimensional Distance)

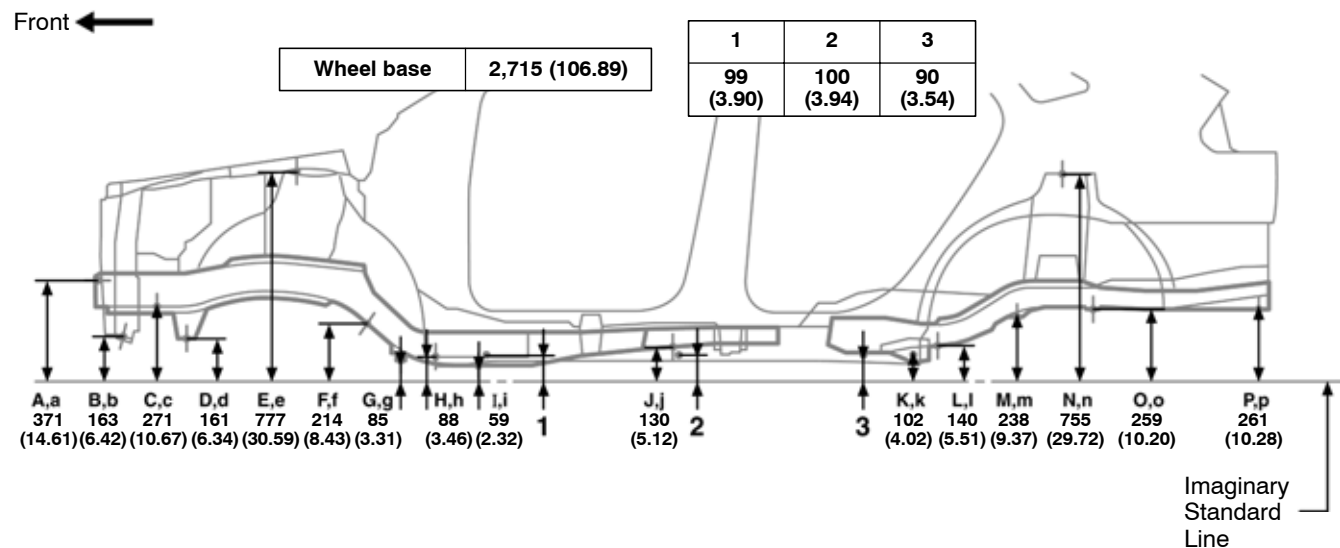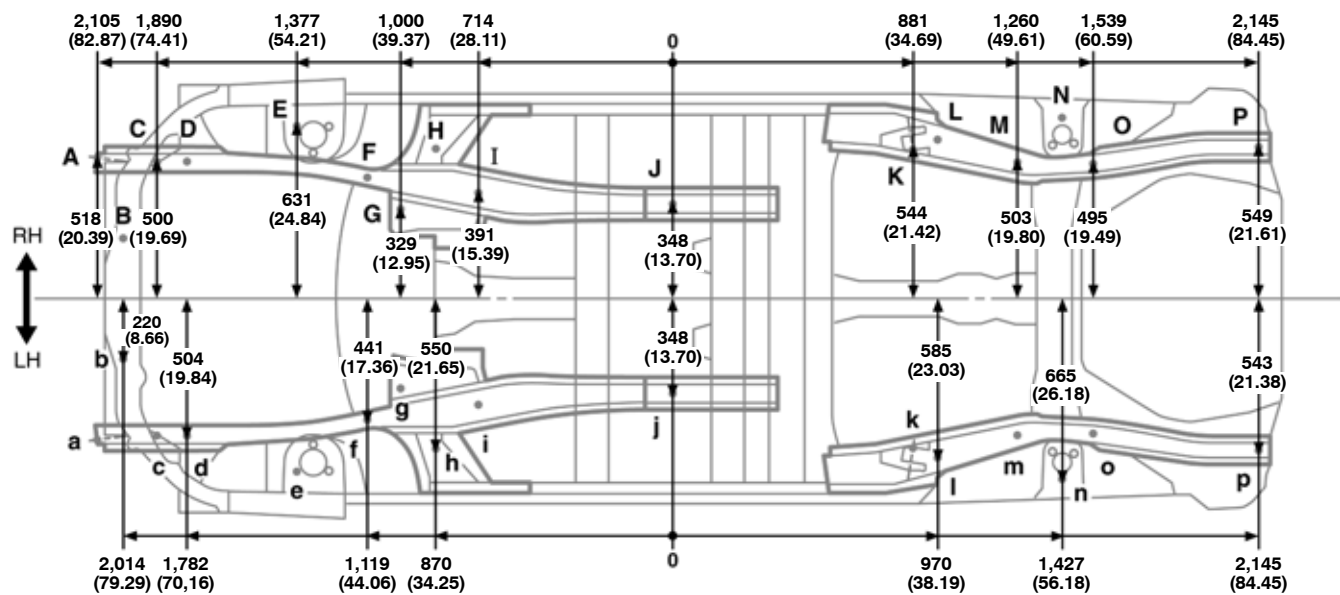


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	M10 (0.39)	I, i	Front side member standard hole	25 (0.98)
B, b	Front crossmember lower standard hole	15 (0.59)	J, j	Front floor under reinforcement standard hole	18 (0.71)
C, c	Front side member standard hole	18 (0.71)	K, k	Rear strut bar installation hole inner	12 (0.47)
D, d	Front frame installation nut	M16 (0.63)	L, l	Rear floor side member standard hole	18 (0.71)
E, e	Front spring support hole outer-front	11 (0.43)	M, m	Rear suspension member installation nut	M12 (0.47)
F, f	Front side member standard hole	10 (0.39)	N, n	Rear spring support hole outer	12.5 (0.492)
G, g	Front frame installation nut	M16 (0.63)	O, o	Rear suspension member installation nut	M12 (0.47)
H, h	Torque box front standard hole	25 (0.98)	P, p	Transport hook installation nut	M10 (0.39)

UNDER BODY

4WD


(Two-Dimensional Distance)

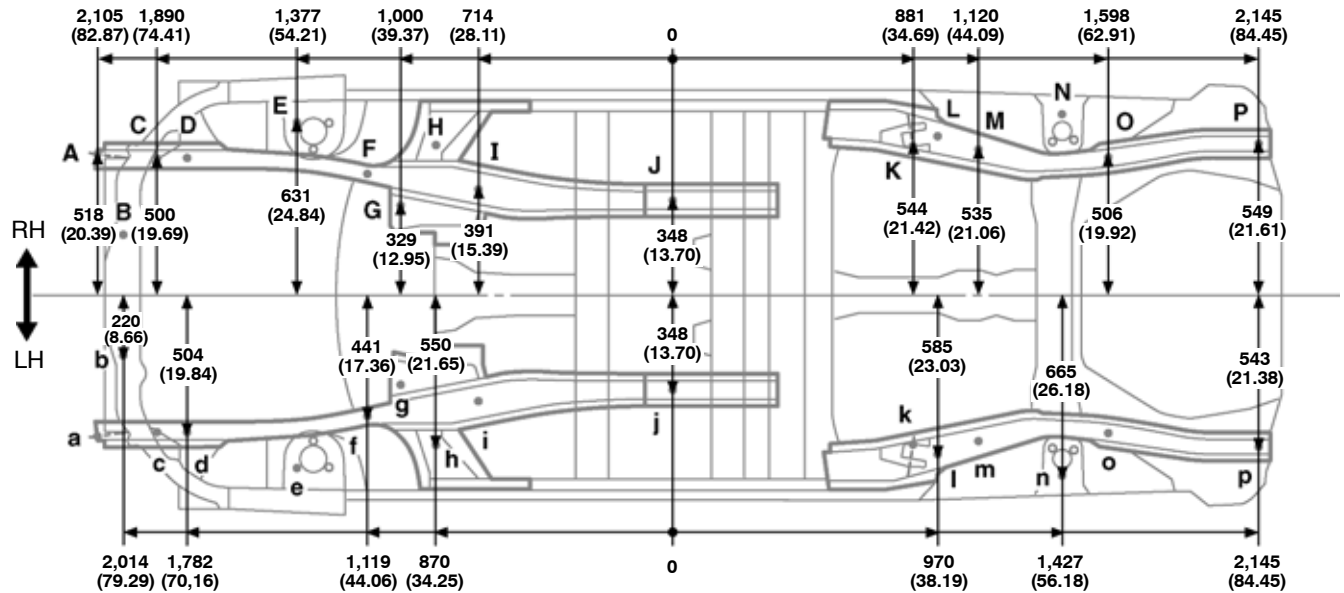

Front ←

Wheel base	2,715 (106.89)
------------	----------------

1	2	3
99 (3.90)	100 (3.94)	100 (3.94)

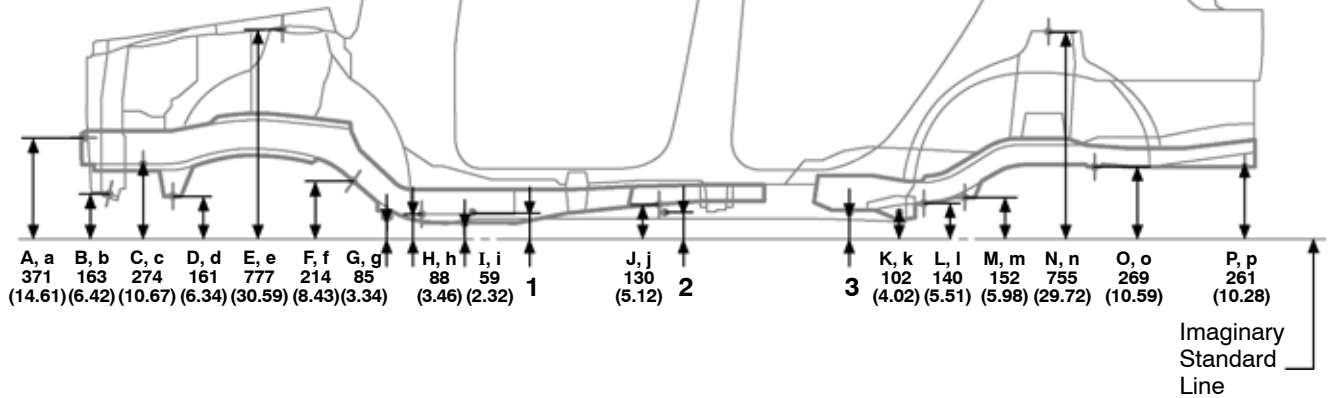


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	M10 (0.39)	I, i	Front side member standard hole	25 (0.98)
B, b	Front crossmember lower standard hole	15 (0.59)	J, j	Front floor under reinforcement standard hole	18 (0.71)
C, c	Front side member standard hole	18 (0.71)	K, k	Rear strut bar installation hole inner	12 (0.47)
D, d	Front frame installation nut	M16 (0.63)	L, l	Rear floor side member standard hole	18 (0.71)
E, e	Front spring support hole outer-front	11 (0.43)	M, m	Rear suspension member installation nut	M14 (0.55)
F, f	Front side member standard hole	10 (0.39)	N, n	Rear spring support hole outer	12.5 (0.492)
G, g	Front frame installation nut	M16 (0.63)	O, o	Rear suspension member installation nut	M10 (0.39)
H, h	Torque box front standard hole	25 (0.98)	P, p	Transport hook installation nut	M10 (0.39)

FRONT FRAME


(Three-Dimensional Distance)

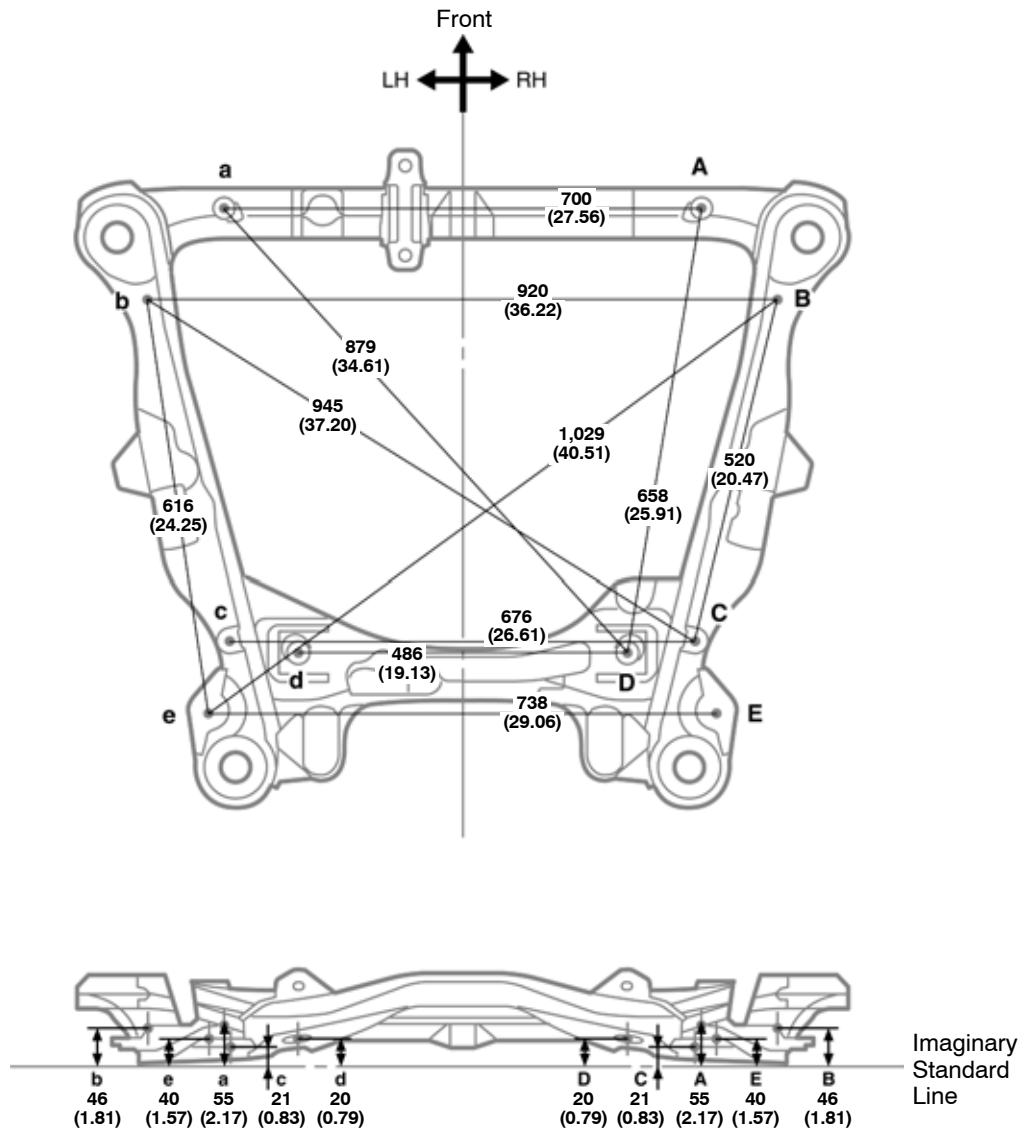

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front frame standard hole	13 (0.51)	D, d	Front frame standard hole	13 (0.51)
B, b	Front frame standard hole	13 (0.51)	E, e	Lower arm installation hole	15 (0.59)
C, c	Front frame standard hole	13 (0.51)	—	—	—

FRONT FRAME

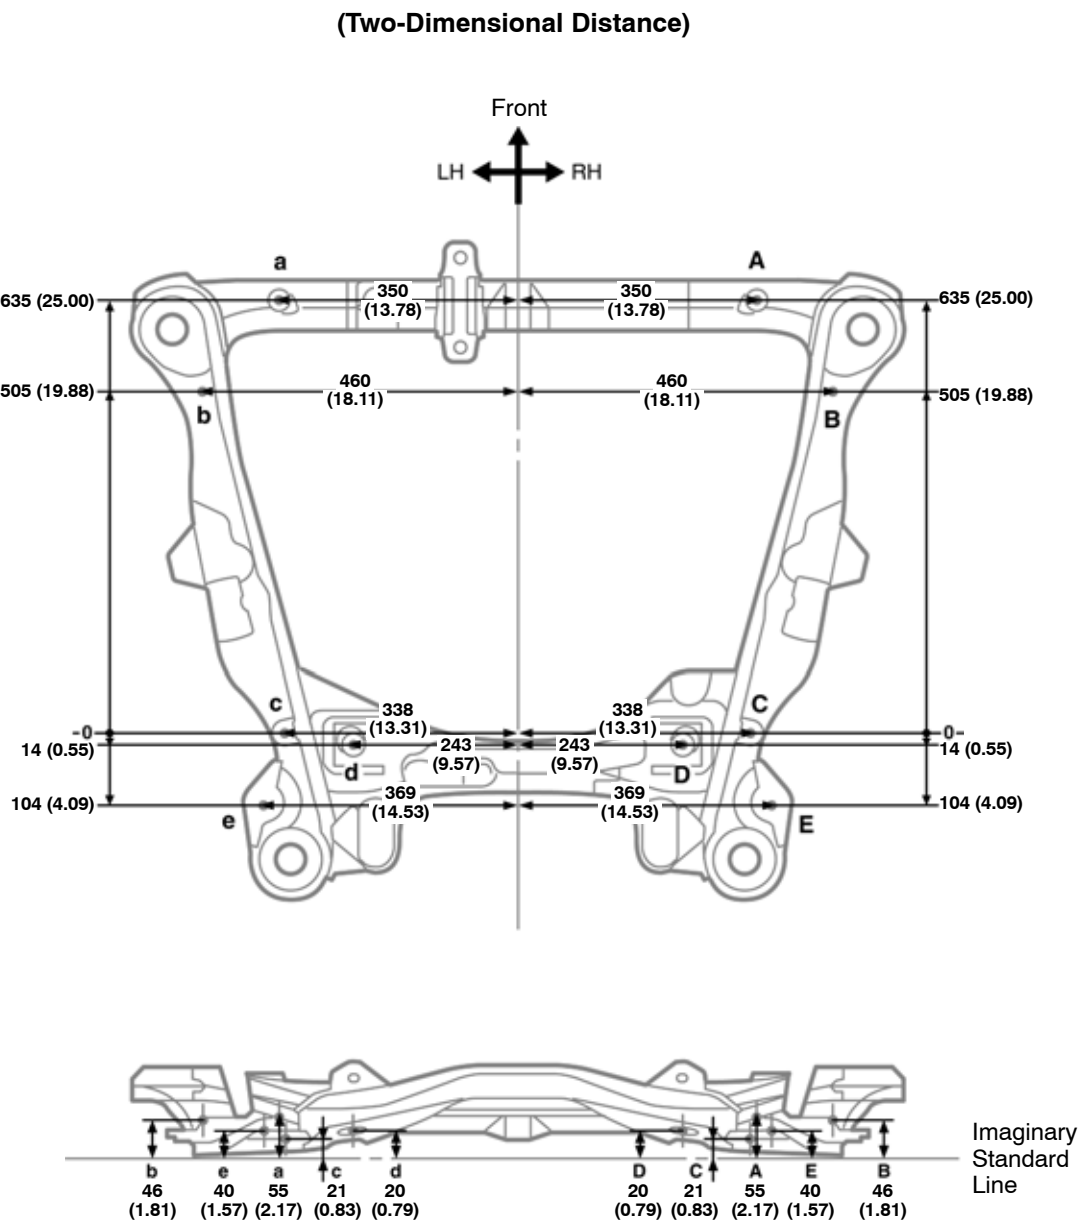

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front frame standard hole	13 (0.51)	D, d	Front frame standard hole	13 (0.51)
B, b	Front frame standard hole	13 (0.51)	E, e	Lower arm installation hole	15 (0.59)
C, c	Front frame standard hole	13 (0.51)	—	—	—