


LUBRICATION SYSTEM

1. General


- The lubrication is fully pressurized and all oil passes through an oil filter.
- A trochoid gear type oil pump is directly driven by the crankshaft.

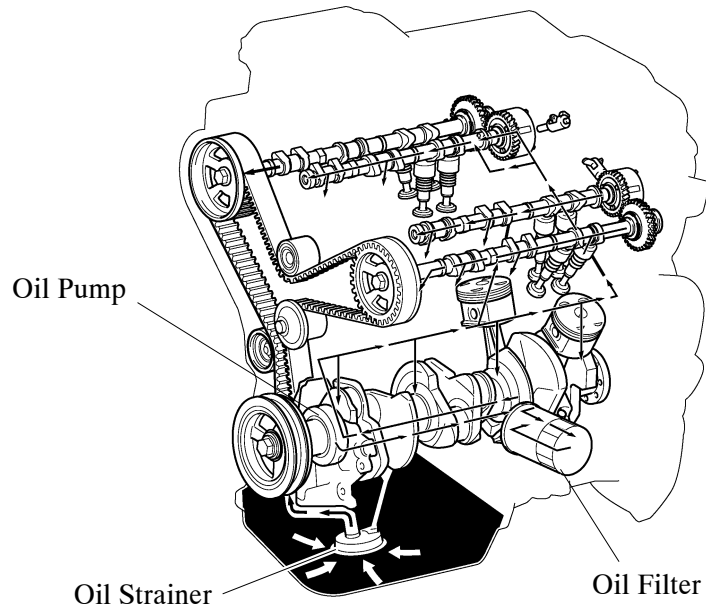

211EG07

Oil Capacity


	liter (US qts, Imp. qts)
Dry	5.5 (5.8, 4.8)
with Oil Filter	4.7 (5.0, 4.1)
without Oil Filter	4.5 (4.8, 4.0)

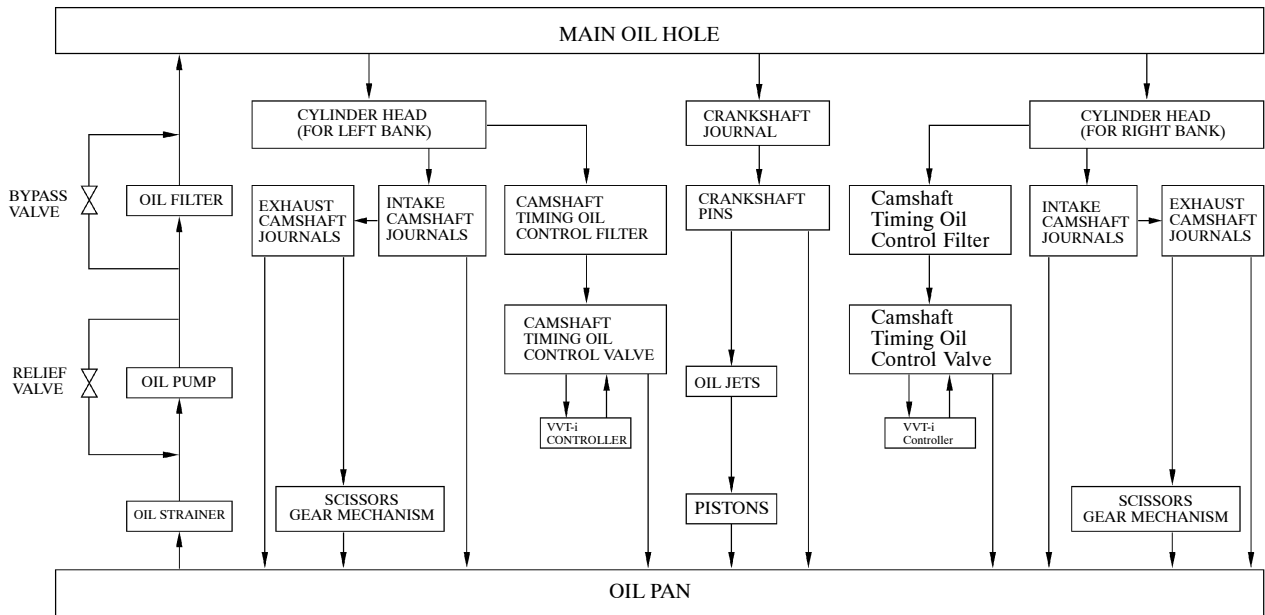

187EG22

2. Oil Pan

- The oil pan is made up of 2 piece. No.1 oil pan is made of aluminum alloy and No.2 oil pan is made of steel sheet.
- No.1 oil pan is secured to the cylinder block and the transaxle housing and is increasing rigidity.

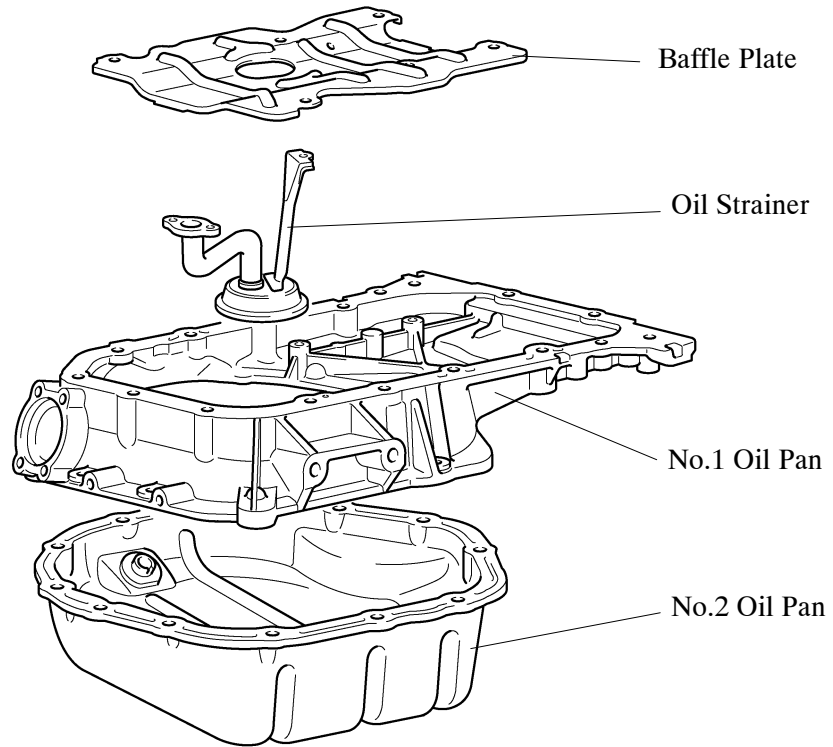

187EG23