


► Speaker Location ◀

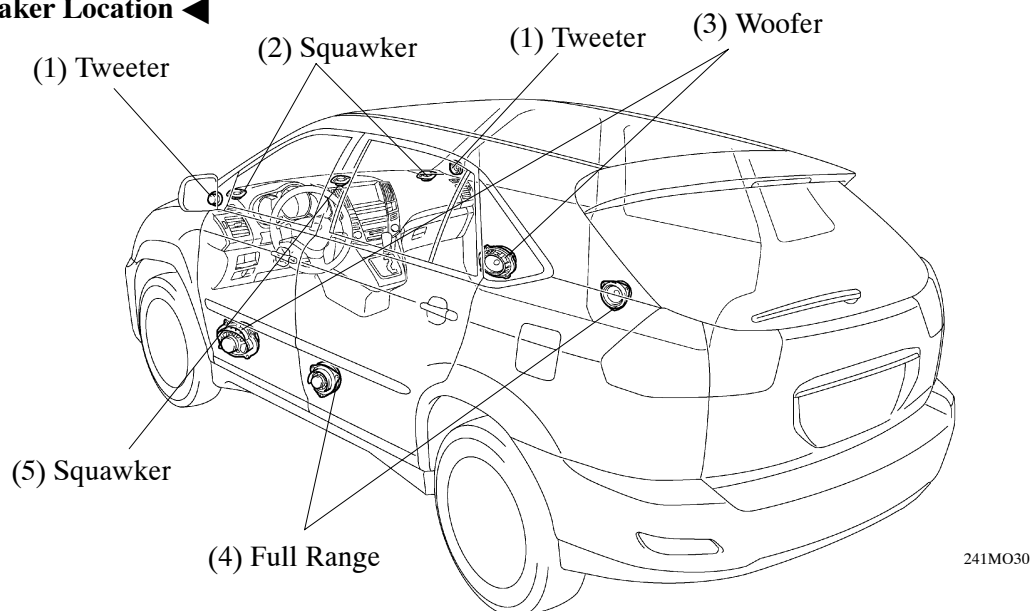


► Speaker Specification ◀

		Mark Levinson (Option)			Pioneer (Standard)		
		Caliber	Impedance	Output	Caliber	Impedance	Input Rated (max)
(1)	Tweeter	2 cm	8 Ω	240 W	3.5 cm	4 Ω	21 W (50 W)
(2)	Squawker	6.5 cm	8 Ω		6.5 cm	4 Ω	21 W (50 W)
(3)	Woofer	6 $\times$ 9 in.	8 Ω		6 $\times$ 9 in.	2 Ω	33 W (83 W)
(4)	Full Range	16 cm + 2 cm	16 Ω		16 cm	4 Ω	21 W (50 W)
(5)	Squawker (Center)	6.5 cm	8 Ω		—	—	—


Intelligent Adaptive Front-lighting System

- An optional Intelligent AFS (Adapting Front-lighting System), which orients the front headlight (low beam) toward the inside of curve in accordance with vehicle speed and steering angle. This improves the driver's view at night when cornering to help safe driving.
- AFS ECU controls Automatic Headlight Beam Level Control System as well. When Intelligent AFS is installed, HID (High Intensity Discharge) and Automatic Headlight Beam Level Control System are equipped together with it.

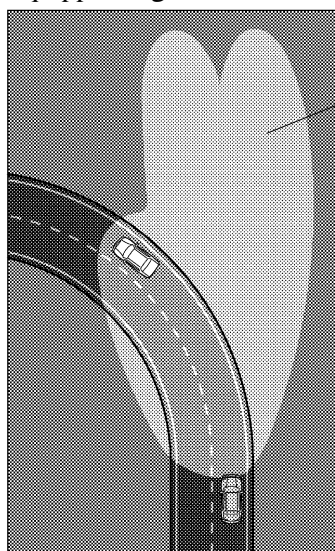

With Intelligent AFS

241BE15

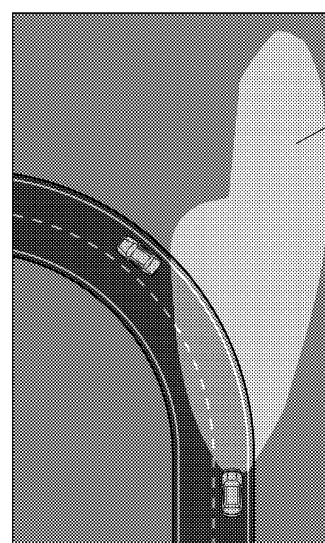

Without Intelligent AFS

241BE16