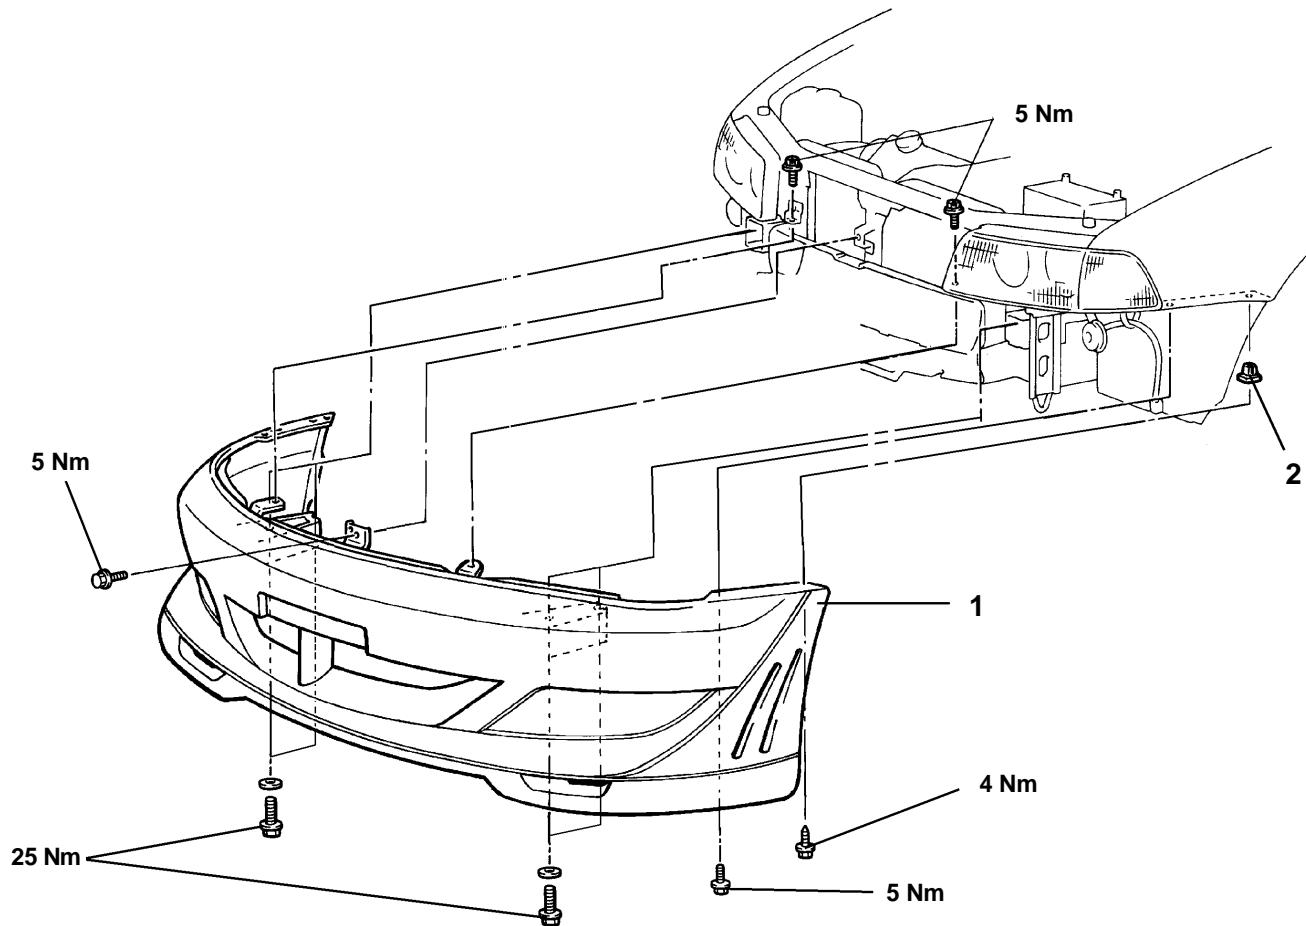


FRONT BUMPER <RALLIART>**REMOVAL AND INSTALLATION****Pre-removal and Post-installation Operation**

1. Undercover panel Removal and Installation
2. Splash shield Removal and Installation
3. Radiator grille Removal and Installation


**Removal steps**

1. Bumper assembly

2. Clip

RALLIART BODY KIT FRONT AND SIDE REMOVAL AND INSTALLATION


Note:
• Side air dam service points

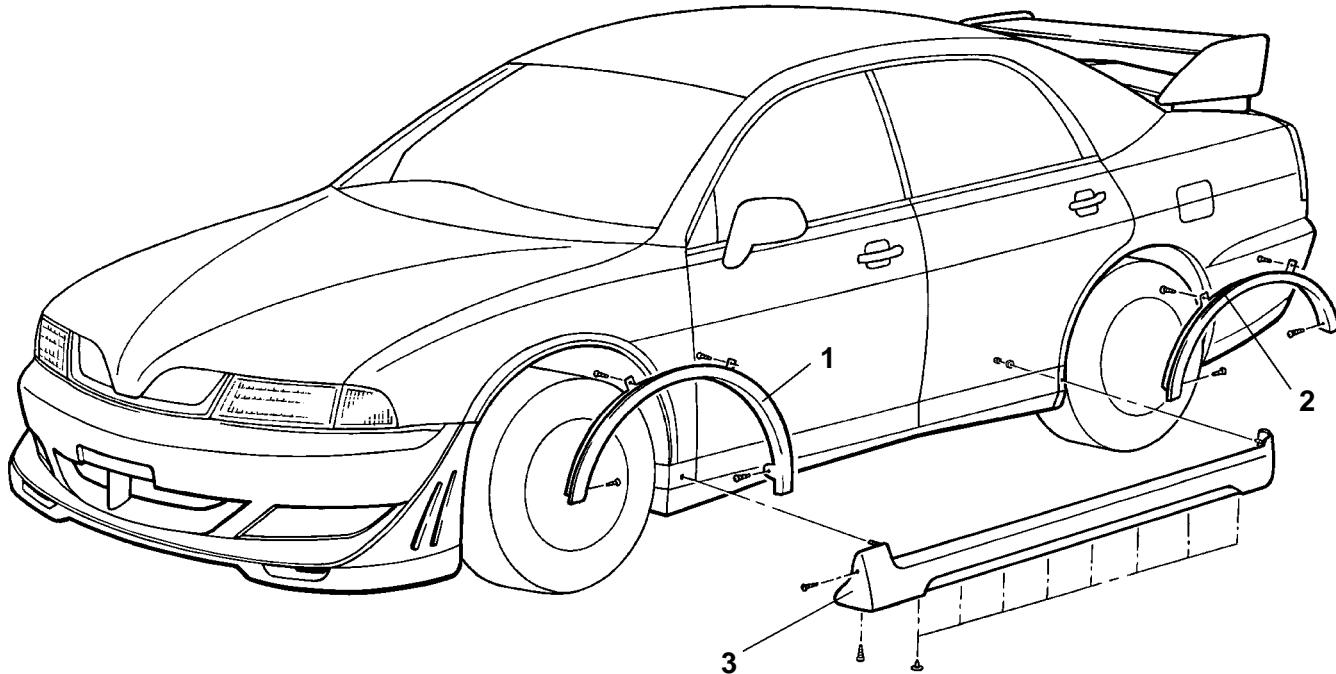

1. Wheel arch flare front
2. Wheel arch flare rear

3. Side air dam

RALLIART BODY KIT REAR REMOVAL AND INSTALLATION

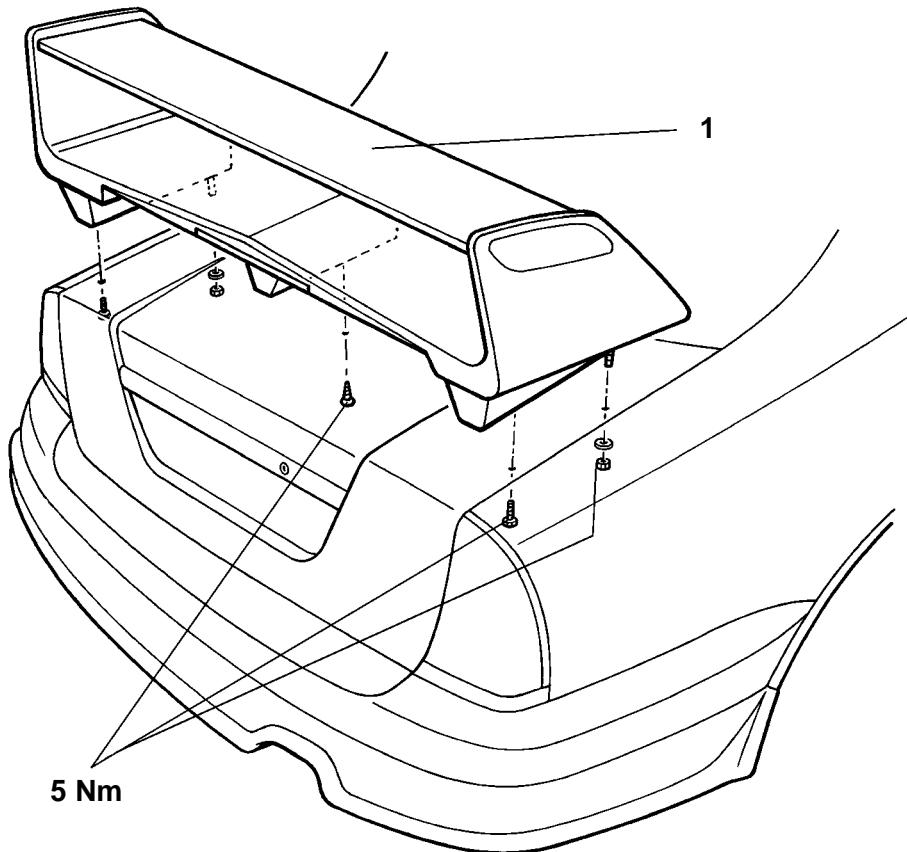

18TJ138A

►A◀ 1. Rear spoiler

INSTALLATION SERVICE POINT

►A◀ REAR SPOILER FITMENT

Do not disassemble rear spoiler, spoiler is serviced as an assembly.