

Edition: July 2011
Revision: July 2011
Publication No. SM2E-1C11U0

NISSAN VERSA

MODEL C11 SERIES

QUICK REFERENCE INDEX

A GENERAL INFORMATION	GI General Information
B ENGINE	EM Engine Mechanical
	LU Engine Lubrication System
	CO Engine Cooling System
	EC Engine Control System
	FL Fuel System
	EX Exhaust System
	ACC Accelerator Control System
C TRANSMISSION/ TRANSAXLE	CL Clutch System
	MT Manual Transaxle
	AT Automatic Transaxle
	CVT CVT
D DRIVELINE/AXLE	FAX Front Axle
	RAX Rear Axle
E SUSPENSION	FSU Front Suspension
	RSU Rear Suspension
	WT Road Wheels & Tires
F BRAKES	BR Brake System
	PB Parking Brake System
	BRC Brake Control System
	PS Power Steering System
G STEERING	STC Steering Control System
	SB Seat Belts
H RESTRAINTS	SRS Supplemental Restraint System (SRS)
	BL Body, Lock & Security System
I BODY	GW Glasses, Window System & Mirrors
	RF Roof
	EI Exterior & Interior
	IP Instrument Panel
	SE Seat
	MTC Manual Air Conditioner
	SC Starting & Charging System
J AIR CONDITIONER	LT Lighting System
	DI Driver Information System
	WW Wiper, Washer & Horn
	BCS Body Control System
	LAN LAN System
	AV Audio Visual, Navigation & Telephone System
	ACS Auto Cruise Control System
	PG Power Supply, Ground & Circuit Elements
	MA Maintenance
K ELECTRICAL	
L MAINTENANCE	

A

B

C

D

E

F

G

H

I

J

K

L

M

© 2011 NISSAN NORTH AMERICA, INC.

All rights reserved. No part of this Service Manual may be reproduced or stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photo-copying, recording or otherwise, without the prior written permission of Nissan North America Inc.

FOREWORD

This manual contains maintenance and repair procedures for the 2012 NISSAN VERSA HATCHBACK.

In order to assure your safety and the efficient functioning of the vehicle, this manual should be read thoroughly. It is especially important that the PRECAUTIONS in the GI section be completely understood before starting any repair task.

All information in this manual is based on the latest product information at the time of publication. The right is reserved to make changes in specifications and methods at any time without notice.

IMPORTANT SAFETY NOTICE

The proper performance of service is essential for both the safety of the technician and the efficient functioning of the vehicle.

The service methods in this Service Manual are described in such a manner that the service may be performed safely and accurately. Service varies with the procedures used, the skills of the technician and the tools and parts available. Accordingly, anyone using service procedures, tools or parts which are not specifically recommended by NISSAN must first be completely satisfied that neither personal safety nor the vehicle's safety will be jeopardized by the service method selected.



NISSAN NORTH AMERICA, INC.
Technical Publications Department



PLEASE HELP MAKE THIS SERVICE MANUAL BETTER!

Your comments are important to NISSAN and will help us to improve our Service Manuals.
Use this form to report any issues or comments you may have regarding our Service Manuals.
Please print this form and type or write your comments below. Mail or fax to:

Nissan North America, Inc.
Technical Service Information
39001 Sunrise Drive, P.O. Box 9200
Farmington Hills, MI USA 48331
FAX: (248) 488-3880

SERVICE MANUAL: Model: _____ Year: _____

PUBLICATION NO. (Refer to Quick Reference Index): _____

Please describe any Service Manual issues or problems in detail:

Page number(s) _____ *Note: Please include a copy of each page, marked with your comments.*

Are the trouble diagnosis procedures logical and easy to use? (circle your answer) YES NO

If no, what page number(s)? _____ *Note: Please include a copy of each page, marked with your comments.*

Please describe the issue or problem in detail: _____

Is the organization of the manual clear and easy to follow? (circle your answer) YES NO

Please comment: _____

What information should be included in NISSAN Service Manuals to better support you in servicing or repairing customer vehicles?

DATE: _____ YOUR NAME: _____ POSITION: _____

DEALER: _____ DEALER NO.: _____ ADDRESS: _____

CITY: _____ STATE/PROV./COUNTRY: _____ ZIP/POSTAL CODE: _____

QUICK REFERENCE CHART: VERSA HATCHBACK

Engine Tune-up Data

INFOID:000000007799262

GENERAL SPECIFICATIONS

Engine type		MR18DE
Cylinder arrangement		In-line 4
Displacement	cm ³ (cu in)	1,797 (109.65)
Bore and stroke	mm (in)	84.0 x 81.1 (3.307 x 3.192)
Valve arrangement		DOHC
Firing order		1-3-4-2
Number of piston rings	Compression	2
	Oil	1
Compression ratio		9.9
Compression pressure kPa (kg/cm ² , psi) / 250 rpm	Standard	1,500 (15.3, 217.6)
	Minimum	1,200 (12.2, 174)
	Differential limit between cylinders	100 (1.0, 15)

DRIVE BELT

Tension of drive belt	Auto adjustment by auto-tensioner
-----------------------	-----------------------------------

SPARK PLUG

Unit: mm (in)

Make	DENSO
Standard type*	FXE20HR-11
Spark plug gap	Nominal: 1.1 (0.043)

*: Always check with the Parts Department for the latest parts information.

Front Wheel Alignment (Unladen*)


INFOID:000000007799261

Market		United States and Canada	
Tire size		P185/65R15, P195/55R16	
Camber Degree minute (Decimal degree)	RH	Minimum	- 0° 55' (- 0.92°)
		Nominal	- 0° 10' (- 0.17°)
		Maximum	0° 35' (0.58°)
	LH	Minimum	- 0° 55' (- 0.92°)
		Nominal	- 0° 10' (- 0.17°)
		Maximum	0° 35' (0.58°)
	Left or right difference (LH - RH)	Minimum	-0° 33' (-0.55°)
		Nominal	0° 0' (0°)
		Maximum	0° 33' (0.55°)

QUICK REFERENCE CHART: VERSA HATCHBACK

2012

Market		United States and Canada	
Tire size		P185/65R15, P195/55R16	
Caster Degree minute (Decimal degree)	RH	Minimum	4° 05' (4.08°)
		Nominal	4° 50' (4.83°)
		Maximum	5° 35' (5.58°)
	LH	Minimum	3° 55' (3.92°)
		Nominal	4° 40' (4.67°)
		Maximum	5° 25' (5.42°)
	Left or right difference (LH - RH)	Minimum	-0° 45' (-0.75°)
		Nominal	-0° 12' (-0.20°)
		Maximum	0° 21' (0.35°)
Kingpin inclination Degree minute (Decimal degree)		Minimum	9° 10' (9.17°)
		Nominal	9° 55' (9.92°)
		Maximum	10° 40' (10.67°)

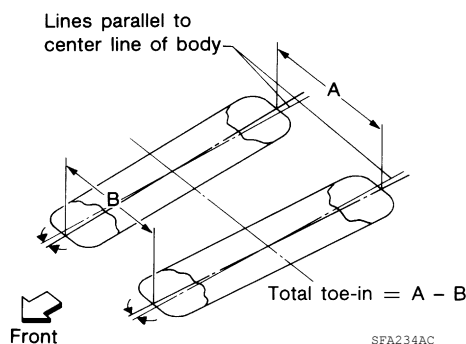

Total toe-in	Distance (A - B)	Minimum	0 mm (0 in)
		Nominal	1 mm (0.04 in)
		Maximum	2 mm (0.08 in)
	Angle (left or right, each side) Degree minute second (Decimal degree)	Minimum	0° 0' 0" (0°)
		Nominal	0° 2' 42" (0.05°)
		Maximum	0° 5' 24" (0.09°)

*: Fuel, engine coolant and engine oil full. Spare tire, jack, hand tools and mats in designated positions.

Rear Wheel Alignment (Unladen*)


INFOID:000000007799259

Market		United States and Canada	
Tire size		P185/65R15, P195/55R16	
Camber Degree minute (Decimal degree)	Minimum	- 2° 0' 30" (- 2.01°)	
	Nominal	- 1° 30' 30" (- 1.51°)	
	Maximum	- 1° 0' 30" (- 1.01°)	

QUICK REFERENCE CHART: VERSA HATCHBACK

2012

Market	United States and Canada
Tire size	P185/65R15, P195/55R16

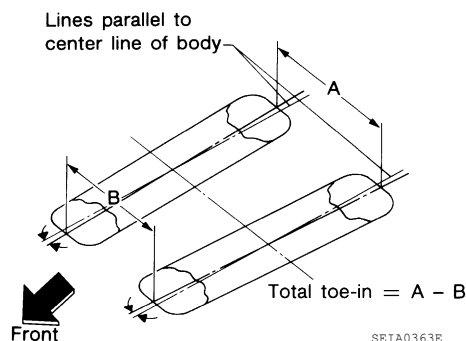


Total toe-in	Distance (A - B)	Minimum	-1.0 mm (-0.039 in)
		Nominal	3.0 mm (0.118 in)
		Maximum	7.0 mm (0.276 in)
	Angle (left or right, each side) Degree minute (Decimal degree)	Minimum	-0° 2' 30" (-0.04°)
		Nominal	0° 8' 30" (0.14°)
		Maximum	0° 19' 0" (0.32°)

*: Fuel, engine coolant and engine oil full. Spare tire, jack, hand tools and mats in designated positions.

Wheelarch Height (Unladen*)

INFOID:000000007799260

Unit: mm (in)

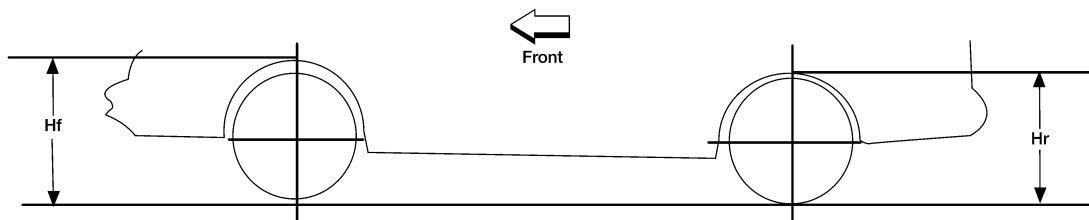

LEIA0085E

Tire size	P185/65R15		P195/55R16
Market	United States	Canada	United States
Front (Hf)	685 (26.97)	685 (26.97)	686 (27.01)
Rear (Hr)	682 (26.85)	683 (26.89)	683 (26.89)

*: Fuel, engine coolant and engine oil full. Spare tire, jack, hand tools and mats in designated positions.

Brake Specifications

INFOID:000000007799256

MR18DE

Front brake	Brake model	CLZ25VF
	Cylinder bore diameter	57.2 mm (2.252 in)
	Pad Length × width × thickness	125.6 mm × 48.0 mm × 9.5 mm (4.945 in × 1.890 in × 0.374 in)
	Rotor outer diameter × thickness	280 mm × 24.0 mm (11.02 in × 0.945 in)
Rear brake	Brake model	LT23
	Cylinder bore diameter	19.06 mm (0.750 in)
	Drum inner diameter	228.6 mm (9.000 in)

QUICK REFERENCE CHART: VERSA HATCHBACK


2012

Master cylinder	Cylinder bore diameter	23.81 ± 0.015 mm (0.937 ± 0.001 in)
Brake booster	Booster model	C255
	Diaphragm diameter	255 mm (10.04 in)

Brake Pedal

INFOID:000000007799255

Unit: mm (in)

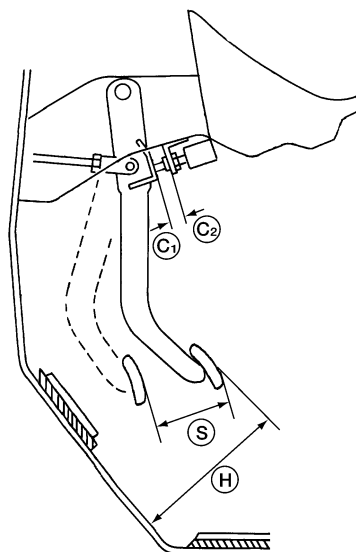

AWFIA0557ZZ

Brake pedal free height (H) (from dash panel top surface)	A/T, CVT model	172.4 +10/-0 (6.78 +0.39/-0)
	M/T model	162.3 +10/-0 (6.39 +0.39/-0)
Brake pedal full stroke (S)		133 (5.24)
Clearance between the pedal stopper and threaded end of stop lamp switch (C1) and ASCD cancel switch (C2), if equipped		0.74 - 1.96 (0.0291 - 0.0772)

Front Disc Brake

INFOID:000000007799254

Unit: mm (in)

Brake model		CLZ25VF
Brake pad	Standard thickness (new)	9.5 (0.374)
	Minimum thickness	2.0 (0.079)
Disc rotor	Standard thickness (new)	24.0 (0.945)
	Repair limit thickness	22.0 (0.866)
	Runout limit (measured at 10.0 mm (0.394 in) inside the disc edge)	0.07 (0.0028)
	Maximum uneven wear (measured at 8 positions)	0.02 mm (0.0008 in) or less

Rear Drum Brake

INFOID:000000007799253

Unit: mm (in)

Brake model		LT23
Brake lining	Standard thickness (new)	4.0 (0.157)
	Minimum thickness	1.5 (0.059)

QUICK REFERENCE CHART: VERSA HATCHBACK

2012

Drum	Standard inner diameter (new)	228.6 (9.000)
	Repair limit inner diameter	230.0 (9.055)

Fluids and Lubricants

INFOID:000000007799252

Description		Capacity (Approximate)		
		Metric	US measure	Imp measure
Fuel		50.0 ℓ	13 1/4 gal	11 gal
Engine oil Drain and refill	With oil filter change	4.1 ℓ	4 3/8 qt	3 5/8 qt
	Without oil filter change	3.9 ℓ	4 1/8 qt	3 3/8 qt
Dry engine (engine overhaul)		4.9 ℓ	5 1/8 qt	4 3/8 qt
Cooling system (with reservoir at MAX level)		6.8 ℓ	7 1/4 qt	6 qt
Manual transaxle fluid (MTF)	RS6F949	2.0 ℓ	4 1/4 pt	3 1/2 pt
Automatic transaxle fluid (ATF)		7.9 ℓ	8 3/8 qt	7 qt
CVT fluid	RE0F08B	6.9 ℓ	7 1/4 qt	6 1/8 qt
Brake and clutch fluid		—	—	—
Multi-purpose grease		—	—	—
Windshield washer fluid		4.5 ℓ	4 3/4 qt	4 qt
Air conditioning system refrigerant		0.45 ± 0.05 kg	0.99 ± 0.11 lb	0.99 ± 0.11 lb
Air conditioning system oil	MR18DE - Type 1	120 m ℓ	4.1 fl oz	4.2 fl oz
	MR18DE - Type 2	100 m ℓ	3.4 fl oz	3.5 fl oz