

Edition: April 2013

Revision: April 2013

Publication No. SM14E1N17U0

NISSAN VERSA

MODEL N17 SERIES

All rights reserved. No part of this Service Manual may be reproduced or stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photo-copying, recording or otherwise, without the prior written permission of Nissan North America, Inc.

QUICK REFERENCE INDEX

A GENERAL INFORMATION	GI General Information
B ENGINE	EM Engine Mechanical
	LU Engine Lubrication System
	CO Engine Cooling System
	EC Engine Control System
	FL Fuel System
	EX Exhaust System
	STR Starting System
	ACC Accelerator Control System
C	
D TRANSMISSION & DRIVE-LINE	CL Clutch
	TM Transaxle & Transmission
	DLN Driveline
	FAX Front Axle
	RAX Rear Axle
E SUSPENSION	FSU Front Suspension
	RSU Rear Suspension
	SCS Suspension Control System
	WT Road Wheels & Tires
F BRAKES	BR Brake System
	PB Parking Brake System
	BRC Brake Control System
G STEERING	ST Steering System
H RESTRAINTS	STC Steering Control System
	SB Seat Belt
	SBC Seat Belt Control System
	SR SRS Airbag
	SRC SRS Airbag Control System
I VENTILATION, HEATER & AIR CONDITIONER	VTL Ventilation System
	HA Heater & Air Conditioning System
	HAC Heater & Air Conditioning Control System
J BODY INTERIOR	INT Interior
	IP Instrument Panel
	SE Seat
	ADP Automatic Drive Positioner
	DLK Door & Lock
K BODY EXTERIOR, DOORS, ROOF & VEHICLE SECURITY	SEC Security Control System
	GW Glass & Window System
	PWC Power Window Control System
	RF Roof
	EXT Exterior
	BRM Body Repair Manual
	MIR Mirrors
L DRIVER CONTROLS	EXL Exterior Lighting System
	INL Interior Lighting System
	WW Wiper & Washer
	DEF Defogger
	HRN Horn
	PWO Power Outlet
	BCS Body Control System
	LAN LAN System
	PCS Power Control System
	CHG Charging System
M ELECTRICAL & POWER CONTROL	PG Power Supply, Ground & Circuit Elements
	MWI Meter, Warning Lamp & Indicator
	WCS Warning Chime System
	SN Sonar System
	AV Audio, Visual & Navigation System
O CRUISE CONTROL	CCS Cruise Control System
P MAINTENANCE	MA Maintenance

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

FOREWORD

This manual contains maintenance and repair procedure for the 2014 NISSAN VERSA SEDAN.

In order to assure your safety and the efficient functioning of the vehicle, this manual should be read thoroughly. It is especially important that the PRECAUTIONS in the GI section be completely understood before starting any repair task.

All information in this manual is based on the latest product information at the time of publication. The right is reserved to make changes in specifications and methods at any time without notice.

IMPORTANT SAFETY NOTICE

The proper performance of service is essential for both the safety of the technician and the efficient functioning of the vehicle.

The service methods in this Service Manual are described in such a manner that the service may be performed safely and accurately. Service varies with the procedures used, the skills of the technician and the tools and parts available. Accordingly, anyone using service procedures, tools or parts which are not specifically recommended by NISSAN must first be completely satisfied that neither personal safety nor the vehicle's safety will be jeopardized by the service method selected.



NISSAN NORTH AMERICA, INC.
Technical Publications Department



PLEASE HELP MAKE THIS SERVICE MANUAL BETTER!

Your comments are important to NISSAN and will help us to improve our Service Manuals.
Use this form to report any issues or comments you may have regarding our Service Manuals.
Please print this form and type or write your comments below. Mail or fax to:

Nissan North America, Inc.
Technical Service Information
39001 Sunrise Drive, P.O. Box 9200
Farmington Hills, MI USA 48331
FAX: (248) 488-3880

SERVICE MANUAL: Model: _____ Year: _____

PUBLICATION NO. (Refer to Quick Reference Index): _____

Please describe any Service Manual issues or problems in detail:

Page number(s) _____ *Note: Please include a copy of each page, marked with your comments.*

Are the trouble diagnosis procedures logical and easy to use? (circle your answer) YES NO

If no, what page number(s)? _____ *Note: Please include a copy of each page, marked with your comments.*

Please describe the issue or problem in detail: _____

Is the organization of the manual clear and easy to follow? (circle your answer) YES NO

Please comment: _____

What information should be included in NISSAN Service Manuals to better support you in servicing or repairing customer vehicles?

DATE: _____ YOUR NAME: _____ POSITION: _____

DEALER: _____ DEALER NO.: _____ ADDRESS: _____

CITY: _____ STATE/PROV./COUNTRY: _____ ZIP/POSTAL CODE: _____

QUICK REFERENCE CHART: VERSA SEDAN

Engine Tune-up Data


INFOID:000000008955451

GENERAL SPECIFICATIONS

Engine type		HR16DE
Cylinder arrangement		In-line 4
Displacement	cm ³ (cu in)	1,598 (97.51)
Bore and stroke	mm (in)	78.0× 83.6 (3.071 ×3.291)
Valve arrangement		DOHC
Firing order		1-3-4-2
Number of piston rings	Compression	2
	Oil	1
Compression ratio		9.8
Compression pressure kPa (kg/cm ² , psi) / 200 rpm	Standard	1,510 (15.4, 219)
	Minimum	1,270 (12.95, 184)
	Differential limit between cylinders	100 (1.0, 14.5)

Valve Timing

Unit: degree

Valve timing  : Intake valve  : Exhaust valve	 JPBIA4228Z2					
	a	b	c	d	e	f
	216	228	11 (-27) ATDC	59 (-21) ABDC	-1 (49) ATDC	37 (-13) BBDC

(): Valve timing control "ON"

Drive Belt

INFOID:000000008955452

DRIVE BELT

Belt Deflection

Location		Deflection adjustment *		Unit: mm (in)
		Used belt		New belt
		Limit	After adjusted	
Drive belt	With A/C	10 (0.39)	4.9 - 5.2 (0.19 - 0.20)	4.1 - 4.4 (0.16 - 0.17)
	Without A/C	9.1 (0.36)	4.3 - 4.7 (0.17 - 0.19)	3.7 - 3.9 (0.14 - 0.15)
Applied pushing force		98 N (10 kg-f, 22 lb-f)		

*: When engine is cold.

QUICK REFERENCE CHART: VERSA SEDAN

2014

Belt Tension and Frequency

Location		Tension adjustment *		Unit: N (kg-f, lb-f)	Frequency adjustment *		Unit: Hz
		Used belt		New belt	Used belt		New belt
		Limit	After adjusted		Limit	After adjusted	
Drive belt	With A/C	350 (35.7, 78.7)	881 - 951 (89.8 - 97.0, 198.1 - 213.8)	1070 - 1138 (109.1 - 116.0, 240.6 - 255.8)	145.5	230.5 - 239.5	254 - 262
	Without A/C		876 - 964 (89.3 - 98.3, 196.9 - 216.7)	1064 - 1152 (108.5 - 117.5, 239.2 - 259.0)	162	256.5 - 268.5	282.5 - 293.5

*: When engine is cold.

Spark Plug

INFOID:0000000008955453

SPARK PLUG (PLATINUM-TIPPED TYPE)


Make	NGK
Standard type*	PLZKAR6A-11
Gap (nominal)	1.1 mm (0.043 in)

*: Always check with the Parts Department for the latest parts information.

Front Wheel Alignment

INFOID:0000000008955358

Item		Standard
Camber Degree minute (Decimal degree)	Minimum	-0° 50' (-0.83°)
	Nominal	-0° 05' (-0.08°)
	Maximum	0° 40' (0.66°)
	Left and right difference	0° 35' (0.58°)
Caster Degree minute (Decimal degree)	Minimum	2° 55' (2.92°)
	Nominal	3° 40' (3.67°)
	Maximum	4° 25' (4.41°)
	Left and right difference	0° 45' (0.75°)
Kingpin inclination Degree minute (Decimal degree)	Minimum	11° 00' (11.00°)
	Nominal	11° 45' (11.75°)
	Maximum	12° 30' (12.50°)

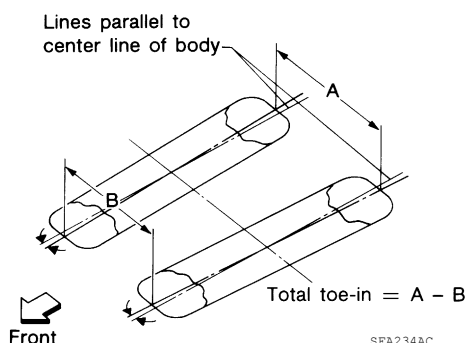

QUICK REFERENCE CHART: VERSA SEDAN

2014


Item			Standard
Total toe-in	Distance (A - B)	Minimum	Out 1 mm (0.03 in)
		Nominal	In 1 mm (0.05 in)
		Maximum	In 3 mm (0.11 in)
	Angle Degree minute second (Decimal degree)	Minimum	Out 0° 4' 48" (0.08°)
		Nominal	In 0° 4' 48" (0.08°)
		Maximum	In 0° 14' 24" (0.24°)

Measure value under unladen* conditions.

*: Fuel, engine coolant and lubricant are full. Spare tire, jack, hand tools and mats are in designated positions.

Rear Wheel Alignment

INFOID:000000008955356

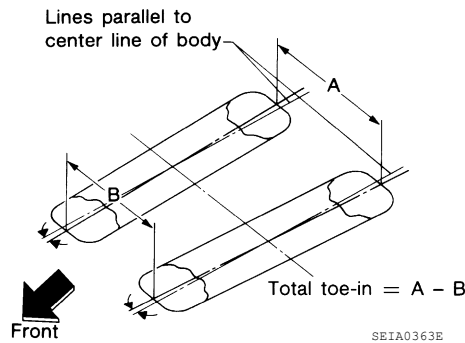

Item			Standard
Camber Degree minute (Decimal degree)		Minimum	-1° 55' (-1.91°)
		Nominal	-1° 25' (-1.42°)
		Maximum	-0° 55' (-0.92°)
Total toe-in	Distance (A - B)	Minimum	Out 2.0 mm (0.079 in)
		Nominal	In 2.0 mm (0.079 in)
		Maximum	In 6.0 mm (0.236 in)
	Angle Degree minute (Decimal degree)	Minimum	Out 0° 2' (0.03°)
		Nominal	In 0° 10' (0.17°)
		Maximum	In 0° 22' (0.37°)


Measure value under unladen* conditions.

*: Fuel, engine coolant and lubricant are full. Spare tire, jack, hand tools and mats are in designated positions.

Wheelarch Height

INFOID:000000008955357

Unit: mm (in)

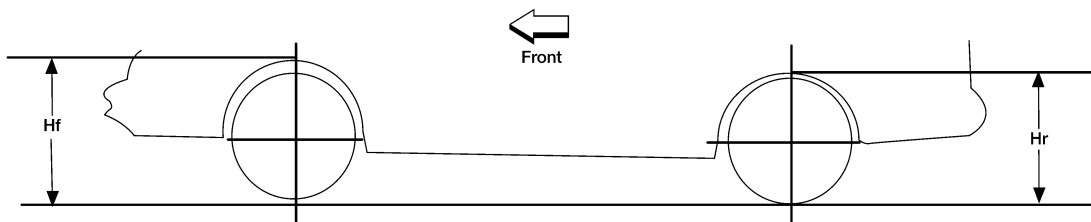

LEIA0085E

Market	United States	Canada
--------	---------------	--------

QUICK REFERENCE CHART: VERSA SEDAN

2014

Front (Hf)	683 (26.89)	684 (26.93)
Rear (Hr)	668 (26.30)	668 (26.30)

Measure value under unladen* conditions.

*: Fuel, engine coolant and lubricant are full. Spare tire, jack, hand tools and mats are in designated positions.

Brake Specifications

INFOID:0000000008955354

Unit: mm (in)

Front brake	Cylinder bore diameter	54.025 (2.13)
	Pad length × width × thickness	115.0 × 41.0 × 9.0 (4.53 × 1.614 × 0.354)
	Rotor outer diameter × thickness	260 × 22.0 (10.24 × 0.87)
Rear brake	Cylinder bore diameter	19.05 (3/4)
	Lining length × width × thickness	Trailing: 172 × 37 × 4.8 (6.77 × 1.46 × 0.19) Leading: 155 × 37 × 4.8 (6.10 × 1.46 × 0.19)
	Drum inner diameter - new	203.2 (8.00)
Master cylinder	Cylinder bore diameter	19 (0.75)
Control valve	Valve type	Electric brake force distribution
Brake booster	Diaphragm diameter	255 (10)

Brake Pedal

INFOID:0000000008955355

Unit: mm (in)

Item	Standard
Brake pedal height	158 ±5 (6.22 ±0.20)
Clearance among the brake pedal lever and the stop lamp switch threaded end	0.2 – 1.96 (0.008 – 0.0772)
Brake pedal full stroke	128 (5.04)

Front Disc Brake

INFOID:0000000008955352

Unit: mm (in)

Item		Limit
Brake pad	Wear thickness	2.0 (0.08)
	Wear thickness	20.0 (0.787)
Disc rotor	Thickness variation (measured at 8 positions)	0.013 (0.001)
	Runout (with it attached to the vehicle)	0.055 (0.002)

Rear Drum Brake

INFOID:0000000008955353

Unit: mm (in)

Item		Limit
Brake lining	Wear thickness	1.0 (0.04)
Brake drum	Wear inner diameter- maximum	204.2 (8.04)

Fluids and Lubricants

INFOID:0000000008955351

Description		Capacity (Approximate)		
		Metric	US measure	Imp measure
Fuel		41.0 ℓ	10-7/8 gal	9 gal
Engine oil Drain and refill	With oil filter change	3.5 ℓ	3-3/4 qt	3-1/8 qt
	Without oil filter change	3.2 ℓ	3-3/8 qt	2-7/8 qt

QUICK REFERENCE CHART: VERSA SEDAN

2014

Description			Capacity (Approximate)		
			Metric	US measure	Imp measure
Fuel			41.0 ℓ	10-7/8 gal	9 gal
Dry engine (engine overhaul)			3.5 ℓ	3-3/4 qt	3-1/8 qt
Cooling system	With reservoir tank at “MAX” level	CVT	7.2 ℓ	7-5/8 qt	6-3/8 qt
		M/T - A/T	6.3 ℓ	6-5/8 qt	5-1/2 qt
	Reservoir tank capacity (at “MAX” level)		0.7 ℓ	3/4 qt	5/8 qt
Automatic transmission fluid			5.2 ℓ	5-1/2 qt	4-5/8 qt
Manual transaxle fluid (MTF)			2.67 ℓ	5-5/8 pt	4-3/4 pt
CVT fluid			6.9 ℓ	7-1/4 qt	6-1/8 qt
Brake and clutch fluid			—	—	—
Multi-purpose grease			—	—	—
Windshield washer fluid			4.5 ℓ	4-3/4 qt	4 qt
Air conditioning system refrigerant			0.40 kg	0.88 lb	0.88 lb
Air conditioning system oil			120 m ℓ	4.1 fl oz	4.2 fl oz