

SECTION MA

MODIFICATION NOTICE:

Specifications of recommended fluids and lubricants have been revised.

CONTENTS

RECOMMENDED FLUIDS AND LUBRICANTS2	SAE Viscosity Number3
Fluids and Lubricants2	

RECOMMENDED FLUIDS AND LUBRICANTS

Fluids and Lubricants

		Capacity (Approximate)		Recommended Fluids/Lubricants
		Liter	Imp measure	
Engine oil (Refill)				
With oil filter	YD25DDTi	2WD 5.6 4WD 4.3*6	4-7/8 qt 3-3/4 qt*6	For Europe: Genuine NISSAN engine oil
Without oil filter	YD25DDTi	2WD 5.3 4WD 4.0*6	4-5/8 qt 3-1/2 qt*6	API CF-4 for YD engine*1, *4 ACEA B1 for YD engine
Cooling system (With reservoir)	YD25DDTi	9.4	8-1/4 qt	For Europe: Genuine NISSAN Anti-freeze Coolant (L250) or equivalent*5
Manual transmission gear oil	FS5R30A	2WD 2.8 4WD 5.1	4-7/8 pt 9 pt	API GL-4, Viscosity SAE 75W-85 only
Transfer fluid	TX10A	2.2	2 qt	Genuine NISSAN ATF Matic Fluid D or equivalent*2 or API GL-4*1
Differential gear oil				
Front	R180A	1.3	2-1/4 pt	Standard differential gear: Differential Oil Hypoid Super GL-5, 80W-90 (Part No.: KLD33-8090201) or API GL-5*1
Rear	C200	1.3	2-1/4 pt	Limited-slip differential (LSD) gear: Differential Oil Hypoid LSD (Part No.: KLD31-8090403) or equivalent
Power steering fluid		—	—	Genuine NISSAN PSF or equivalent*7
Brake and clutch fluid		—	—	For Europe: DOT 3 or DOT 4 (U.S. FMVSS No. 116)*3
Propeller shaft grease		—	—	NLGI No. 2 (Lithium soap base)
Multi-purpose grease		—	—	NLGI No. 2 (Lithium soap base)

*1: For further details, see "SAE Viscosity Number".

*2: Contact a NISSAN dealership for more information regarding suitable fluid, including recommended brand(s) of DEXRON™III/MERCON™ Automatic Transmission Fluid.

*3: Never mix DOT 3 and DOT 4. (DOT 3 is filled at factory.)

*4: Never use CG-4 grade oil.


*5: Use NISSAN Genuine Engine Coolant, or equivalent in its quality, in order to avoid possible aluminum corrosion within the engine cooling system caused by the use of non-genuine engine coolant.

Note that any repairs for the incidents within the engine cooling system while using non-genuine engine coolant may not be covered by the warranty even if such incidents occurred during the warranty period.

*6: Including 4WD appearance 2WD models

*7: DEXRON™III type ATF can be used.

RECOMMENDED FLUIDS AND LUBRICANTS

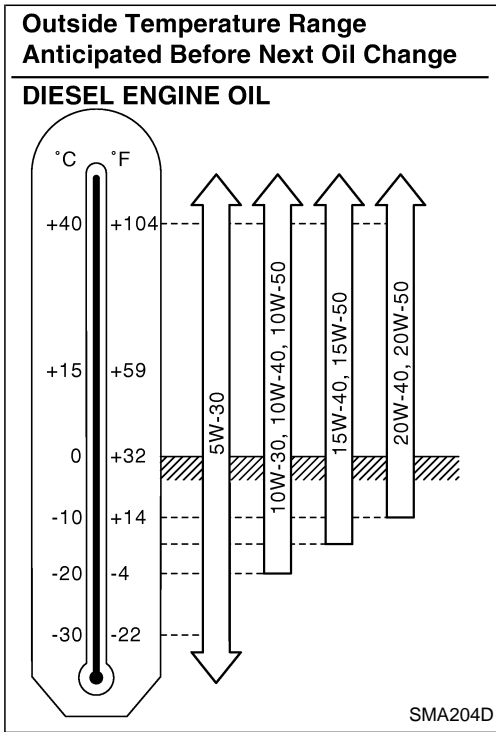

SAE Viscosity Number

DIESEL ENGINE

- 5W-30 is preferable.
If 5W-30 is not available, select the viscosity, from the chart, that is suitable for the outside temperature range.

GI

MA

EM

LC

EC

FE

CL

MT

AT

TF

PD

FA

RA

BR

ST

RS

BT

HA

EL

IDX