

Edition: November 2013
Revision: November 2013
Pub. No. SM14E00T32U0

NISSAN

ROGUE

MODEL T32 SERIES

All rights reserved. No part of this Service Manual may be reproduced or stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photo-copying, recording or otherwise, without the prior written permission of Nissan North America, Inc.

QUICK REFERENCE INDEX

A GENERAL INFORMATION	GI General Information
B ENGINE	EM Engine Mechanical
	LU Engine Lubrication System
	CO Engine Cooling System
	EC Engine Control System
	FL Fuel System
	EX Exhaust System
	STR Starting System
C HYBRID	ACC Accelerator Control System
D TRANSMISSION & DRIVE-LINE	TM Transaxle & Transmission
	DLN Driveline
	FAX Front Axle
	RAX Rear Axle
	FSU Front Suspension
	RSU Rear Suspension
E SUSPENSION	
	WT Road Wheels & Tires
	BR Brake System
	PB Parking Brake System
	BRC Brake Control System
F BRAKES	ST Steering System
	STC Steering Control System
G STEERING	SB Seat Belt
H RESTRAINTS	
	SR SRS Airbag
	SRC SRS Airbag Control System
	VTL Ventilation System
	HA Heater & Air Conditioning System
I VENTILATION, HEATER & AIR CONDITIONER	HAC Heater & Air Conditioning Control System
	INT Interior
	IP Instrument Panel
	SE Seat
J BODY INTERIOR	
	DLK Door & Lock
	SEC Security Control System
	GW Glass & Window System
	PWC Power Window Control System
	RF Roof
	EXT Exterior
	BRM Body Repair Manual
	MIR Mirrors
	EXL Exterior Lighting System
K BODY EXTERIOR, DOORS, ROOF & VEHICLE SECURITY	INL Interior Lighting System
	WW Wiper & Washer
	DEF Defogger
	HRN Horn
	PWO Power Outlet
	BCS Body Control System
	LAN LAN System
	PCS Power Control System
	CHG Charging System
	PG Power Supply, Ground & Circuit Elements
L DRIVER CONTROLS	MWI Meter, Warning Lamp & Indicator
	WCS Warning Chime System
	AV Audio, Visual & Navigation System
	CCS Cruise Control System
	DAS Driver Assistance System
M ELECTRICAL & POWER CONTROL	DMS Drive Mode System
	MA Maintenance
N DRIVER INFORMATION & MULTIMEDIA	
O CRUISE CONTROL	
P MAINTENANCE	

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

FOREWORD

This manual contains maintenance and repair procedure for the 2014 NISSAN ROGUE.

In order to assure your safety and the efficient functioning of the vehicle, this manual should be read thoroughly. It is especially important that the PRECAUTIONS in the GI section be completely understood before starting any repair task.

All information in this manual is based on the latest product information at the time of publication. The right is reserved to make changes in specifications and methods at any time without notice.

IMPORTANT SAFETY NOTICE

The proper performance of service is essential for both the safety of the technician and the efficient functioning of the vehicle.

The service methods in this Service Manual are described in such a manner that the service may be performed safely and accurately. Service varies with the procedures used, the skills of the technician and the tools and parts available. Accordingly, anyone using service procedures, tools or parts which are not specifically recommended by NISSAN must first be completely satisfied that neither personal safety nor the vehicle's safety will be jeopardized by the service method selected.



NISSAN NORTH AMERICA, INC.
Technical Publications Department



PLEASE HELP MAKE THIS SERVICE MANUAL BETTER!

Your comments are important to NISSAN and will help us to improve our Service Manuals.
Use this form to report any issues or comments you may have regarding our Service Manuals.
Please print this form and type or write your comments below. Mail or fax to:

Nissan North America, Inc.
Technical Service Information
39001 Sunrise Drive, P.O. Box 9200
Farmington Hills, MI USA 48331
FAX: (248) 488-3880

SERVICE MANUAL: Model: _____ Year: _____

PUBLICATION NO. (Refer to Quick Reference Index): _____

Please describe any Service Manual issues or problems in detail:

Page number(s) _____ *Note: Please include a copy of each page, marked with your comments.*

Are the trouble diagnosis procedures logical and easy to use? (circle your answer) YES NO

If no, what page number(s)? _____ *Note: Please include a copy of each page, marked with your comments.*

Please describe the issue or problem in detail: _____

Is the organization of the manual clear and easy to follow? (circle your answer) YES NO

Please comment: _____

What information should be included in NISSAN Service Manuals to better support you in servicing or repairing customer vehicles?

DATE: _____ YOUR NAME: _____ POSITION: _____

DEALER: _____ DEALER NO.: _____ ADDRESS: _____

CITY: _____ STATE/PROV./COUNTRY: _____ ZIP/POSTAL CODE: _____

QUICK REFERENCE CHART: ROGUE


Engine Tune-up Data

INFOID:0000000010435980

GENERAL SPECIFICATIONS

Cylinder arrangement		In-line 4
Displacement	cm ³ (cu in)	2,488 (151.82)
Bore and stroke	mm (in)	89.0 x 100.0 (3.504 x 3.940)
Valve arrangement		DOHC
Firing order		1-3-4-2
Number of piston rings	Compression	2
	Oil	1
Compression ratio		9.6
Compression pressure kPa (kg/cm ² , psi)/250 rpm	Standard	1,412 (14.4, 204.7)
	Minimum	1,216 (12.4, 176.3)
	Differential limit between cylinders	100 (1.0, 14.5)

Unit: degree

Valve timing ↶ : Intake valve ↷ : Exhaust valve						
	a	b	c	d	e	f
Except for California	220	232	12 (-28) ATDC	64 (24) ABDC	10	30
For California	224	236	8 (-32) ATDC	64 (24) ABDC	8	36

() : Valve timing control "ON"

Drive belt

INFOID:0000000010435979

DRIVE BELT

Tension of drive belt	Belt tension is not necessary, as it is automatically adjusted by drive belt auto-tensioner.
-----------------------	--

Spark Plug

INFOID:0000000010435978

SPARK PLUG

Unit: mm (in)

Make	DENSO
Standard type	FXE20HE11C
Spark plug gap (Nominal)	1.1 (0.043)


QUICK REFERENCE CHART: ROGUE

2014

Front Wheel Alignment (Unladen*¹)

INFOID:000000010435977

Axle type		FWD		AWD	
Body type		2 ROW	3 ROW	2 ROW	3 ROW
Camber Degree minute (Decimal degree)	Minimum	-1° 04' (-1.07°)	-1° 20' (-1.33°)	-1° 05' (-1.08°)	-1° 15' (-1.25°)
	Nominal	-0° 25' (-0.42°)	-0° 35' (-0.58°)	-0° 20' (-0.33°)	-0° 30' (-0.50°)
	Maximum	0° 14' (0.23°)	-0° 10' (0.17°)	0° 20' (0.33°)	0° 15' (0.25°)
	(LH) and (RH) difference	0° 35' (0.58°) - -0° 35' (-0.58°)			
Caster Degree minute (Decimal degree)	Minimum	5° 0' (5.00°)		4° 50' (4.83°)	4° 55' (4.92°)
	Nominal	5° 45' (5.75°)		5° 35' (5.58°)	5° 40' (5.67°)
	Maximum	6° 30' (6.50°)		6° 20' (6.33°)	6° 25' (6.42°)
	(LH) and (RH) difference	0° 35' (-0.58°) - -0° 35' (-0.58°)			
Kingpin inclination Degree minute (Decimal degree)	Minimum	11° 05' (11.08°)		10° 55' (10.92°)	10° 50' (10.83°)
	Nominal	11° 50' (11.83°)		11° 40' (11.67°)	11° 35' (11.58°)
	Maximum	12° 35' (12.58°)		12° 25' (12.42°)	12° 20' (12.33°)




Total toe-in	Distance (A - B)	Minimum	Out 0.9 mm (Out 0.04 in)	Out 0.8 mm (Out 0.01 in)	In 0.4 mm (In 0.02 in)	In 0.5 mm (In 0.02 in)
		Nominal	In 0.1 mm (In 0.00 in)	In 0.2 mm (In 0.01 in)	In 1.4 mm (In 0.06 in)	In 1.5 mm (In 0.06 in)
		Maximum	In 1.1 mm (In 0.04 in)	In 1.2 mm (In 0.05 in)	In 2.4 mm (In 0.09 in)	In 2.5 mm (In 0.10 in)
	Angle (LH and RH) Degree minute (Decimal degree)	Minimum	Out 0° 06' (Out 0.1°)	Out 0° 06' (Out 0.10°)	Out 0° 12' (Out 0.20°)	
		Nominal	In 0° 00' (In 0.0°)	In 0° 01' (In 0.01°)	In 0° 06' (In 0.10°)	
		Maximum	In 0° 06' (In 0.1°)	In 0° 07' (In 0.12°)	In 0° 00' (In 0.00°)	

*1: Fuel, engine coolant, and lubricants are full. Spare tire, jack, hand tools, and mats are in designated positions.

Rear Wheel Alignment (Unladen*¹)

INFOID:000000010435976

Drive Type		FWD	AWD
Camber Degree minute (Decimal degree)	Minimum	-0° 10' (-0.17°)	0° 10' (0.17°)
	Nominal	-0° 55' (-0.92°)	-0° 35' (-0.58°)
	Maximum	-1° 40' (-1.67°)	-1° 20' (-1.33°)



QUICK REFERENCE CHART: ROGUE

2014

Total toe-in	Distance (A - B)	Minimum	In 2 mm (In 0.08 in)	
		Nominal	In 4 mm (In 0.12 in)	In 2.0 mm (0.08 in)
		Maximum	In 6 mm (In 0.24in)	
	Angle (LH and RH)* ² Degree minute (Decimal degree)	Minimum	In 0° 10' (In 0.17°)	Out 0° 15' (Out 0.25°)
		Nominal	In 0° 20' (In 0.33°)	In 0° 10' (In 0.17°)
		Maximum	In 0° 30' (In 0.50°)	In 0° 35' (In 0.58°)


*1: Fuel, engine coolant, and lubricants are full. Spare tire, jack, hand tools, and mats are in designated positions.

*2: Since an adjustment mechanism is not included, the value of the left and right wheels must be used as the standard value.

Wheelarch Height (Unladen*)

INFOID:0000000010435975

Unit: mm (in)

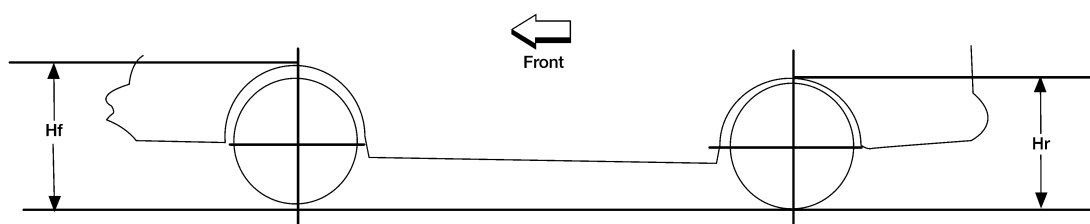

LEIA0085E

Axle type	FWD			AWD		
Body type	2 ROW		3 ROW	2 ROW		3 ROW
Tire size	225/65R17	225/60R18	225/65R17 RF	225/65R17	225/60R18	225/65R17 RF
Front (Hf)	788 (31.02)	792 (31.18)	791 (31.14)	798 (31.42)	801 (31.54)	801 (31.54)
Rear (Hr)	787 (30.98)	789 (31.06)	787 (30.98)	796 (31.34)	798 (31.42)	796 (31.34)

*: Fuel, engine coolant, and lubricants are full. Spare tire, jack, hand tools, and mats are in designated positions.

Brake Specifications

INFOID:0000000010435974

Unit: mm (in)

Front disc brake (One piston caliper)	Cylinder bore diameter	60.33 (2.375)
	Pad length × width × thickness	123.6 × 46.5 × 11.0 (4.87 × 1.870 × 0.433)
	Disc brake rotor outer diameter × thickness	296 × 26.0 (11.65 × 1.024)
Front disc brake (Two piston caliper)	Cylinder bore diameter	60.33 (2.375)
	Pad length × width × thickness	133.6 × 47.5 × 11.0 (5.26 × 1.909 × 0.433)
	Disc brake rotor outer diameter × thickness	320 × 28.0 (12.60 × 1.102)
Rear disc brake	Cylinder bore diameter	38.1 (1.5)
	Pad length × width × thickness	83.0 × 31.9 × 8.5 (3.268 × 1.256 × 0.335)
	Disc brake rotor outer diameter × thickness	292 × 16.0 (11.50 × 0.630)
Master cylinder	Cylinder bore diameter	23.8 (15/16)
Control valve	Valve type	Electric brake force distribution


QUICK REFERENCE CHART: ROGUE

2014

Brake Pedal

INFOID:000000010435973

Unit: mm (in)

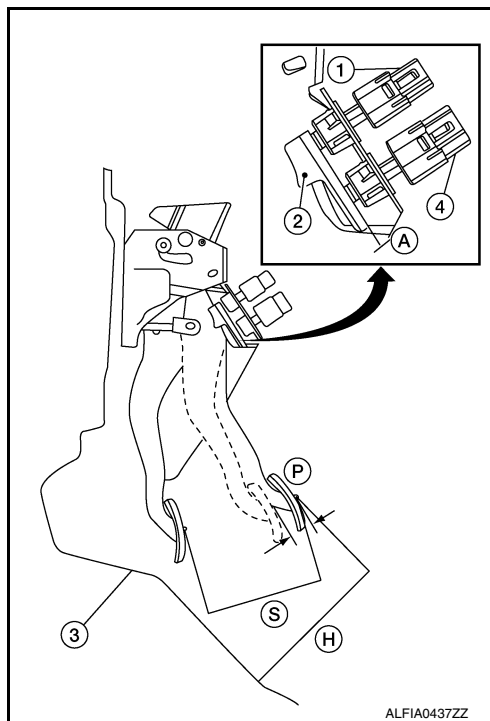

Item	Standard
Brake pedal height (H)	175.9 – 185.9 (9.63 – 7.32)
Clearance (A) between brake pedal stopper bracket (2), stop lamp switch (4) and brake pedal position switch (1) contact ends	0.20 – 1.96 (0.0079 – 0.0772)
Brake pedal full stroke (S)	135.1 (5.32)
Brake pedal play	—

Front Disc Brake

INFOID:000000010435972

Unit: mm (in)

Item	Limit
Brake pad	Wear limit thickness 2.0 (0.079)
Disc brake rotor	Wear limit thickness 24.0 (0.945)
	Thickness variation (measured at 8 positions) 0.020 (0.0008)
	Runout limit (with it attached to the vehicle) 0.035 (0.0014)

Rear Disc Brake

INFOID:000000010435971

Unit: mm (in)

Item	Limit
Brake pad	Wear limit thickness 1.5 (0.059)
Disc brake rotor	Wear limit thickness 14.0 (0.551)
	Thickness variation (measured at 8 positions) 0.020 (0.0008)
	Runout limit (with it attached to the vehicle) 0.070 (0.0028)

QUICK REFERENCE CHART: ROGUE

2014

Fluids and Lubricants

INFOID:0000000010435970

			Capacity (Approximate)	
		Liter	US measure	Imp measure
Fuel		55 ℓ	14-1/2 gal	12-1/8 gal
Engine oil Drain and refill	With oil filter change	4.6 ℓ	4-7/8 qt	4 qt
	Without oil filter change	4.3 ℓ	4-1/2 qt	3-3/4 qt
Dry engine (Overhaul)		5.3 ℓ	5-5/8 qt	4-5/8 qt
Cooling system	With reservoir tank	7.3 ℓ	7-3/4 qt	6-3/8 qt
	Reservoir tank	0.75 ℓ	3/4 qt	5/8 qt
CVT fluid		7.9 ℓ	8-3/8 qt	7 qt
Differential gear oil		0.55 ℓ	1-1/8 pt	1 pt
Transfer oil		0.31 ℓ	5/8 pt	1/2 qt
Brake fluid		—	—	—
Multi-purpose grease		—	—	—
Windshield washer fluid		5.45 ℓ	5-3/4 qt	4-3/4 qt
Air conditioning system refrigerant		0.50 kg	1.10 lb	1.10 lb
Air conditioning system oil		110 m ℓ	3.7 fl oz	3.9 fl oz

QUICK REFERENCE CHART: QX60

2014

Description	Capacity (Approximate)		
	Metric	US measure	Imp measure
Air conditioning system refrigerant	0.83 ± 0.03 kg	1.83 ± 0.07 lb	1.83 ± 0.07 lb
Air conditioning system oil	230 m ℓ	7.8 fl oz	8.1 fl oz

FOR MEXICO : Fluids and Lubricants

INFOID:000000009914741

		Capacity (Approximate)		
		Metric	US measure	Imp measure
Fuel		74.0 ℓ	19-1/2 gal	16-1/4 gal
Engine oil Drain and refill	With oil filter change	4.8 ℓ	5-1/8 qt	4-1/4 qt
	Without oil filter change	4.5 ℓ	4-3/4 qt	4 qt
	Dry engine (engine overhaul)	5.1 ℓ	5-3/8 qt	4-1/2 qt
Cooling system (with reservoir at MAX line)		9.6 ℓ	10-1/8 qt	8-1/2 qt
CVT fluid		8.8 ℓ	9-1/4 qt	7-3/4 qt
Differential gear oil		0.5 ℓ	1 pt	7/8 pt
Transfer fluid		0.31 ℓ	5/8 pt	1/2 pt
Power steering fluid		1.0 ℓ	2-1/8 qt	1-3/4 qt
Brake fluid		—	—	—
Multi-purpose grease		—	—	—
Windshield washer fluid		4.6 ℓ	4-7/8 qt	4 qt
Air conditioning system refrigerant		0.83 ± 0.03 kg	1.83 ± 0.07 lb	1.83 ± 0.07 lb
Air conditioning system oil		230 m ℓ	7.8 fl oz	8.1 fl oz