


23.Cargo Bed Side Tray

A: REMOVAL

- 1) Open tail gate.
- 2) Remove bolt using TORX® bit T30. Remove clip.

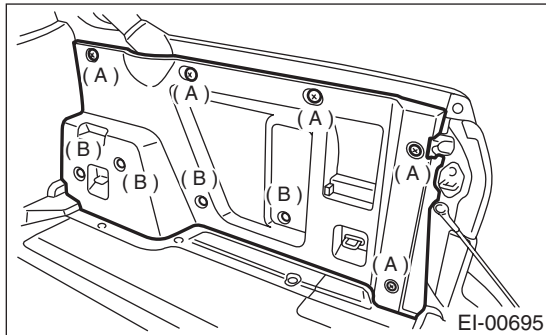

- (A) Bolt
(B) Clip

B: INSTALLATION

Install in the reverse order of removal.

Tightening torque:

7.5 N·m (0.76 kgf-m, 5.53 ft-lb)