


## 12. Noise Suppressor

### A: REMOVAL


#### 1. SEDAN MODEL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the rear quarter trim. <Ref. to EI-60, SEDAN MODEL, REMOVAL, Rear Quarter Trim.>
- 3) Remove the curtain airbag module. <Ref. to AB-19, REMOVAL, Curtain Airbag Module.>
- 4) Disconnect harness connector from the noise suppressor.
- 5) Remove the harness clip.
- 6) Remove the screws and detach the noise suppressor.

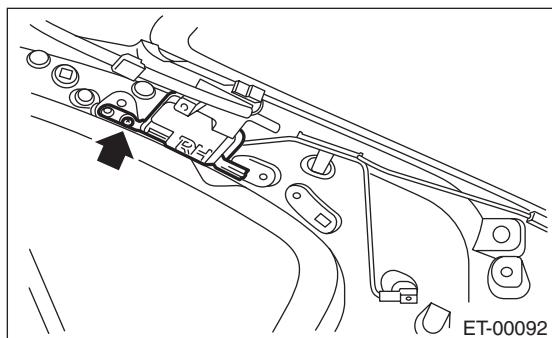

#### 2. WAGON MODEL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the rear gate trim. <Ref. to EI-65, REMOVAL, Rear Gate Trim.>
- 3) Disconnect harness connector from the noise suppressor.
- 4) Remove the screws and detach the noise suppressor.

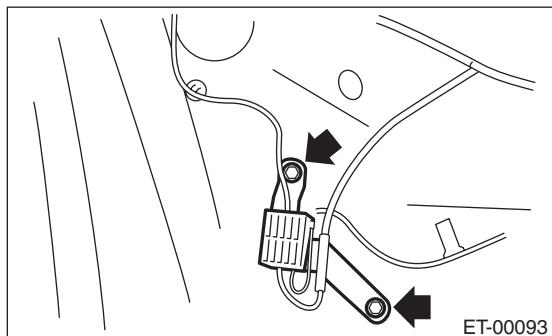

### B: INSTALLATION

Install in the reverse order of removal.