


## 17. Front Accessory Power Supply Socket

### A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the console front panel. <Ref. to EI-52, REMOVAL, Center Console.>
- 3) Disconnect the harness connector, and remove the accessory power supply socket.

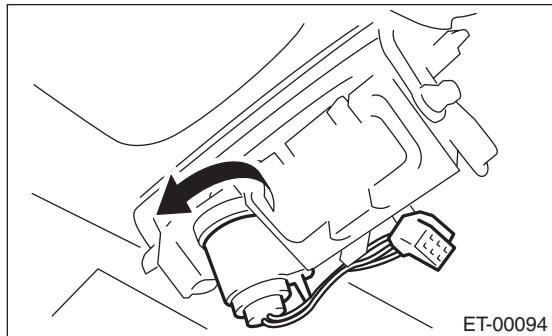

### B: INSTALLATION

Install in the reverse order of removal.