


18. Rear Accessory Power Supply Socket

A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the console box. <Ref. to EI-51, REMOVAL, Console Box.>
- 3) Disconnect the harness connector, and remove the accessory power supply socket.

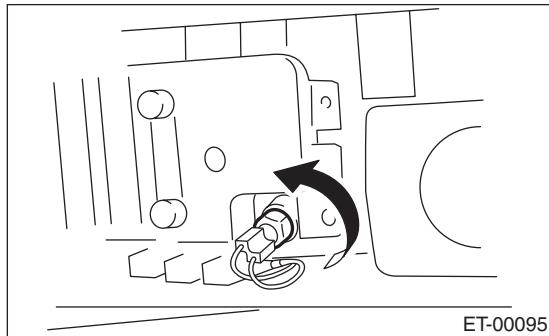

ET-00095

B: INSTALLATION

Install in the reverse order of removal.