


7. Scalp Cap

A: REPLACEMENT


1. MODEL WITH SIDE TURN SIGNAL LIGHT

- 1) Remove the mirror. <Ref. to GW-20, REPLACEMENT, Outer Mirror.>
- 2) Press-in the upper side clips (A) from inside of outer mirror.

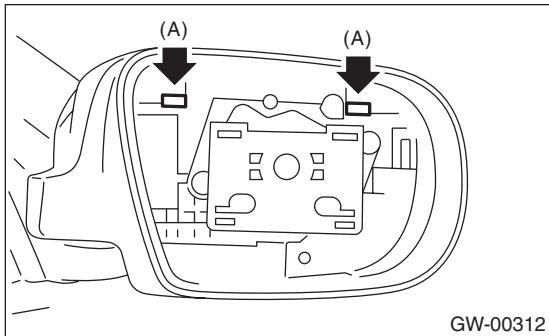


GW-00312

- 3) Pull the scalp cap frontward of outer mirror, remove the upper side clips (A) and lower side hooks (B), and then remove the scalp cap.

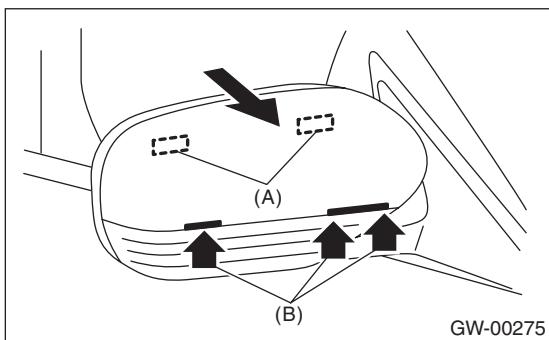

GW-00275

- 4) Insert the lower hooks (B) of scalp cap to the outer mirror and push the upper clips (A) in.

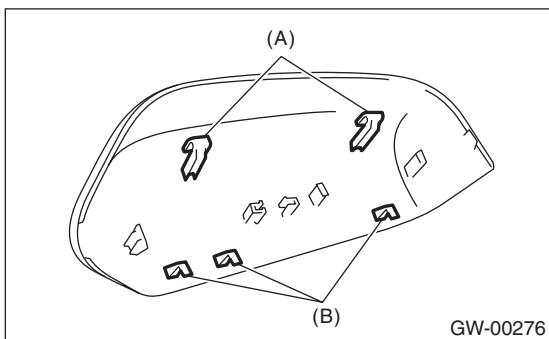

GW-00276


- 5) Install the scalp cap securely.

CAUTION:

Do not remove the scalp cap forcibly. The lower hooks may be damaged.


2. MODEL WITHOUT SIDE TURN SIGNAL LIGHT

- 1) Remove the mirror. <Ref. to GW-20, REPLACEMENT, Outer Mirror.>
- 2) Press-in the clips (A) from inside of outer mirror.

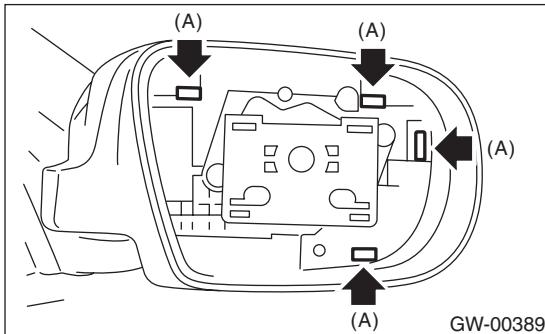

GW-00389

- 3) Pull the scalp cap towards the front of the outer mirror, then remove the scalp cap.
- 4) Align clip (A) on the reverse side of the scalp cap and the clip attachment hole of the outer mirror, and push the scalp cap in.

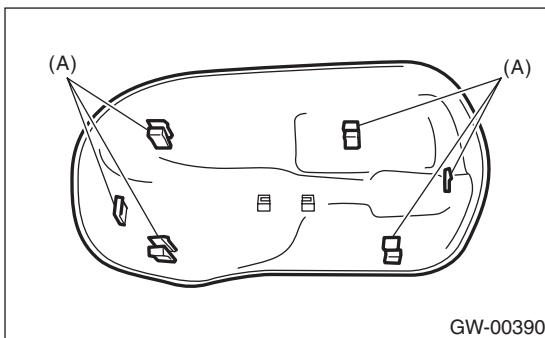

GW-00390

- 5) Install the scalp cap securely.