


36. Reflex Reflector

A: REMOVAL

From behind the bumper, release the claws and remove the reflex reflector.

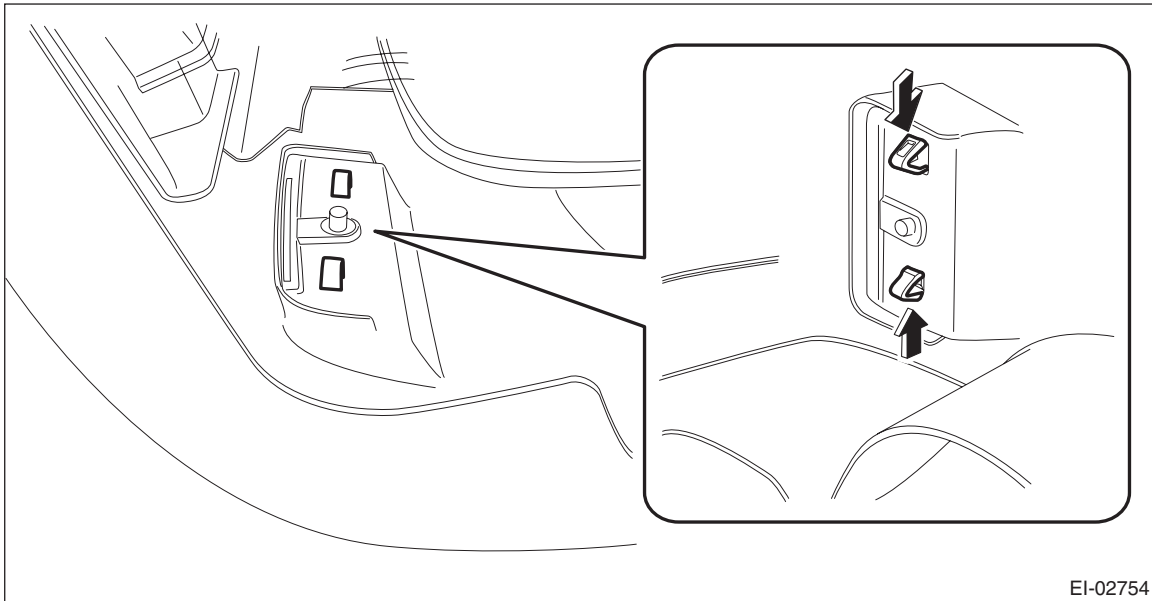

EI-02754

B: INSTALLATION

Install each part in the reverse order of removal.