

CENTER BODY PILLAR (CUT)

REMOVAL

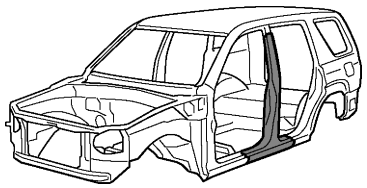

F14036-A

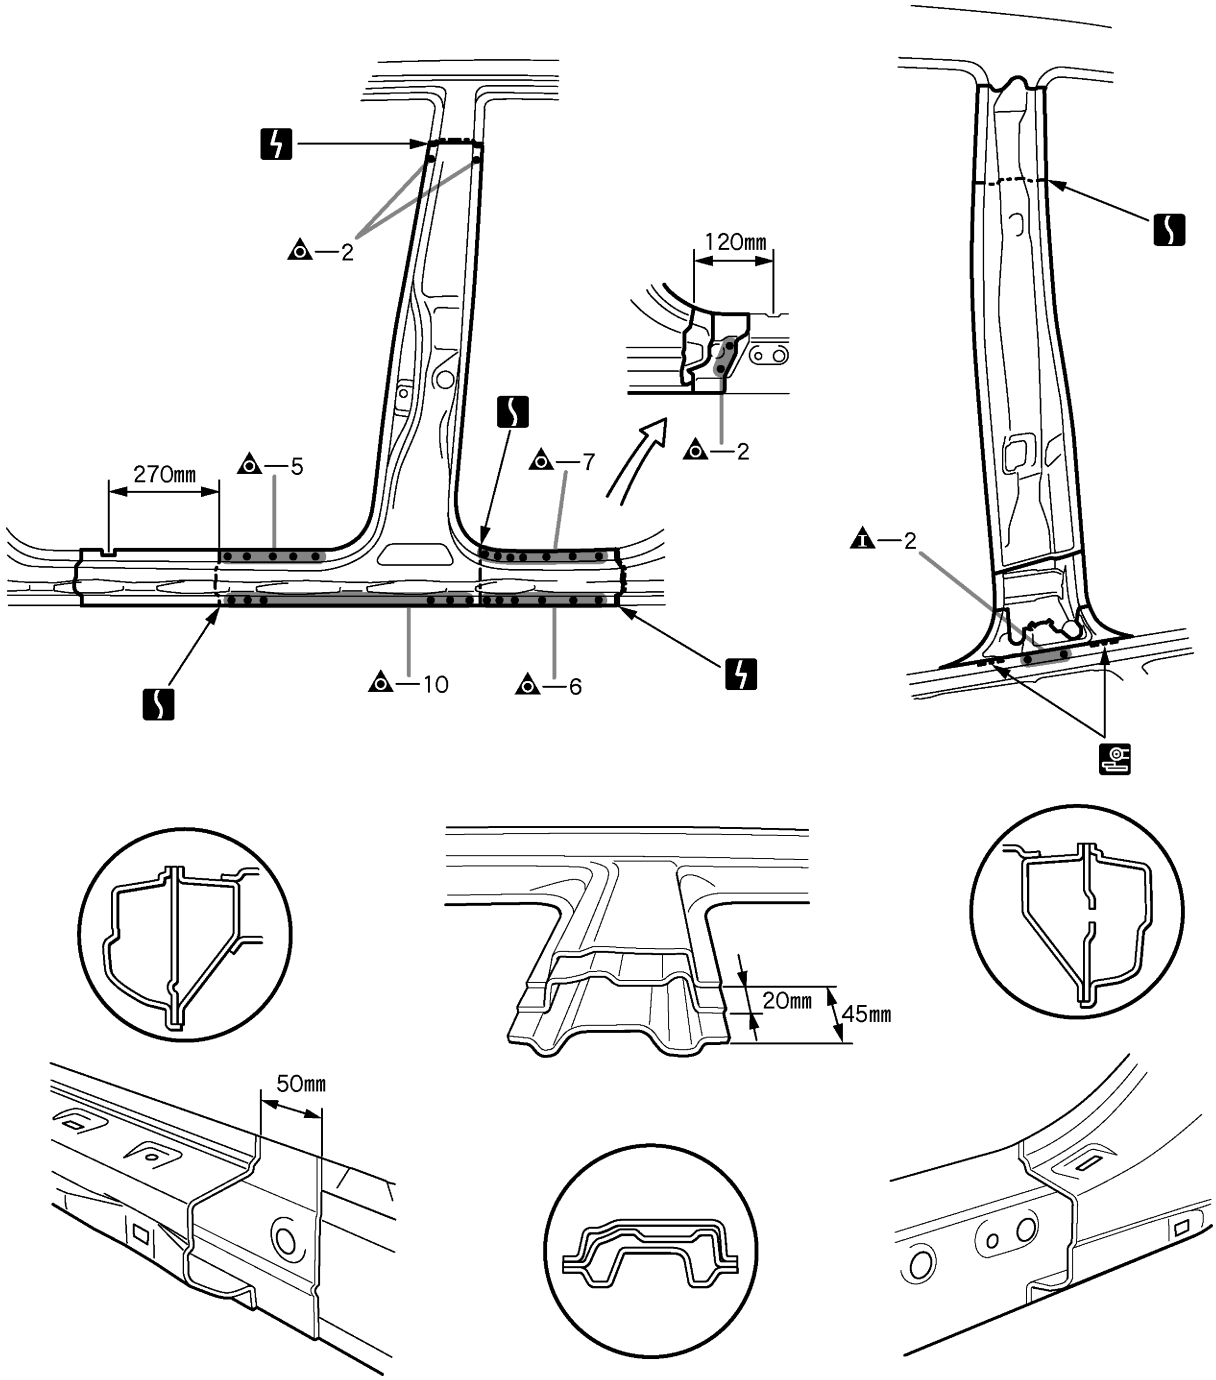


F14036

20mm (0.79in.) 45mm (1.77in.) 50mm (1.97in.) 120mm (4.72in.) 270mm (10.63in.)

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

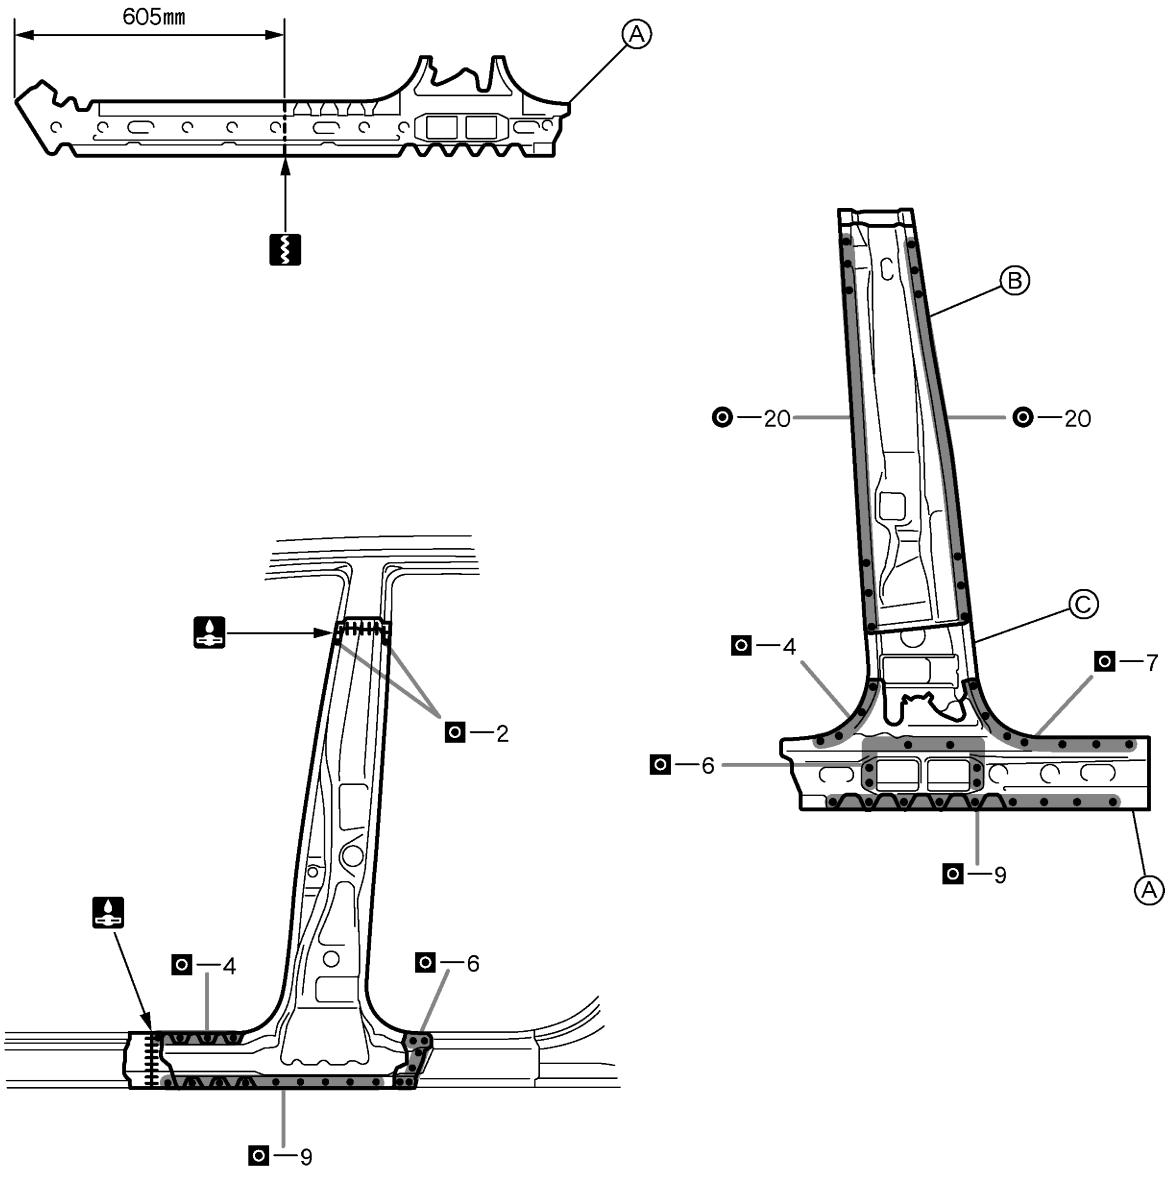

F14037


POINT

1 After welding the reinforcement to the vehicle side, install the outer pillar.

PART NAME

Ⓐ Rocker Inner Front Panel Ⓑ Center Body Inner Pillar Ⓒ Pillar Reinforcement

605mm (23.82in.)

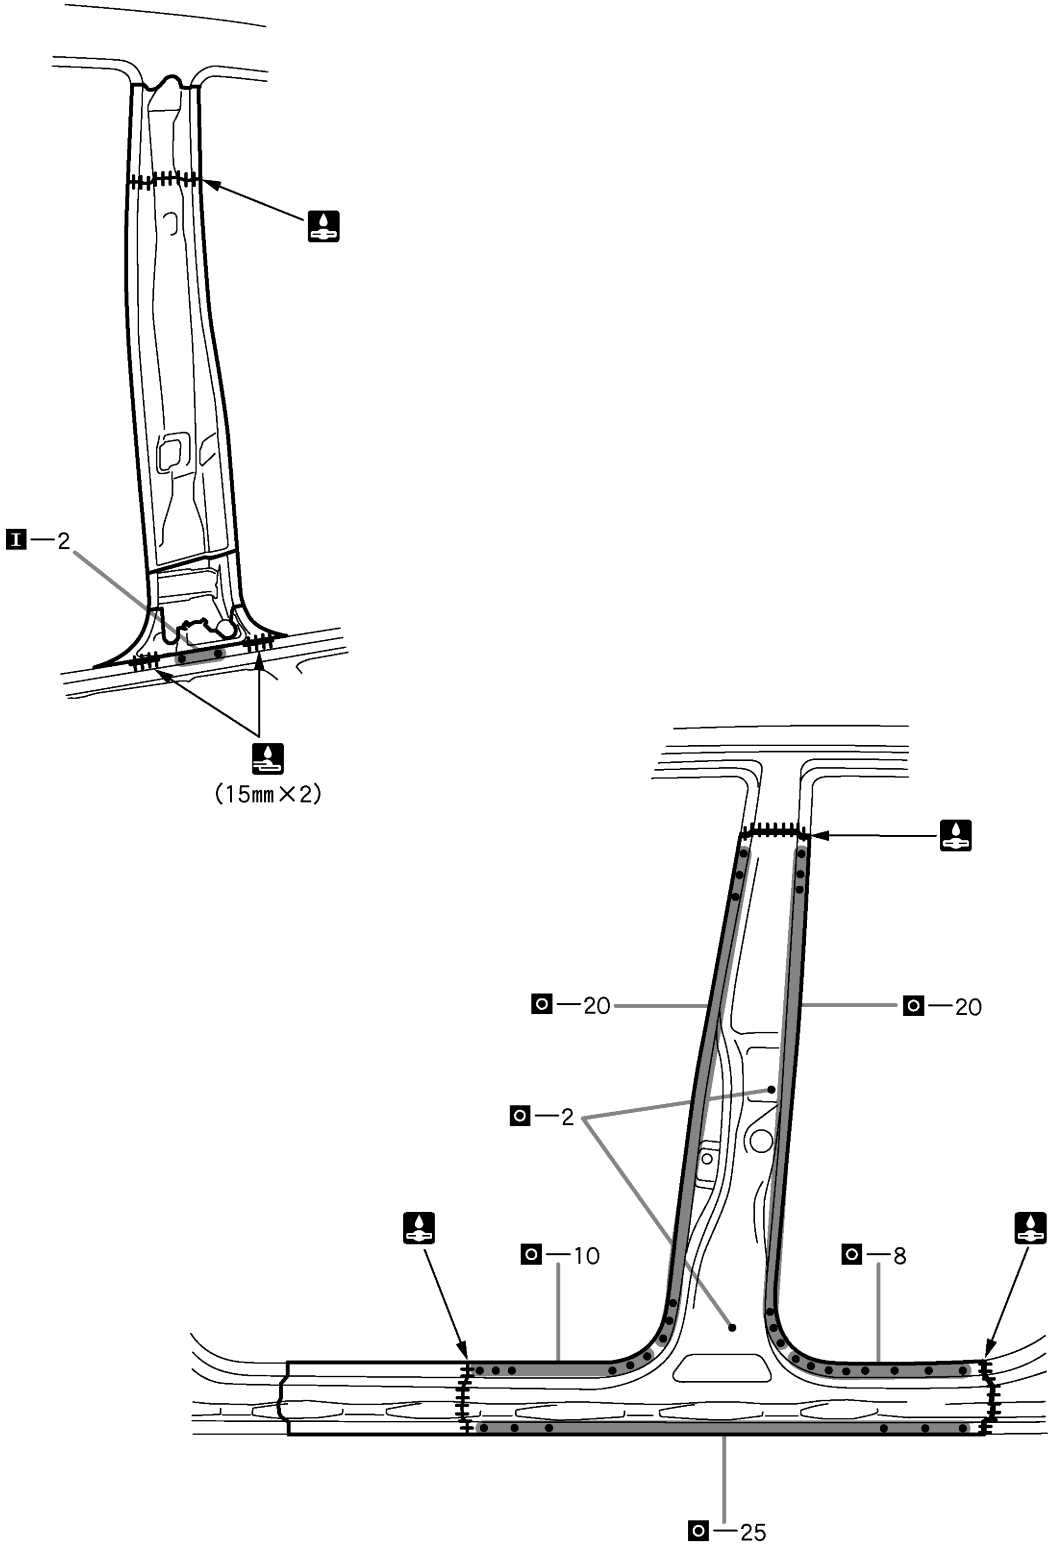

15mm (0.59in.)