
BODY LOWER BACK PANEL (ASSY)


REPLACEMENT

1. REMOVE BODY LOWER BACK PANEL

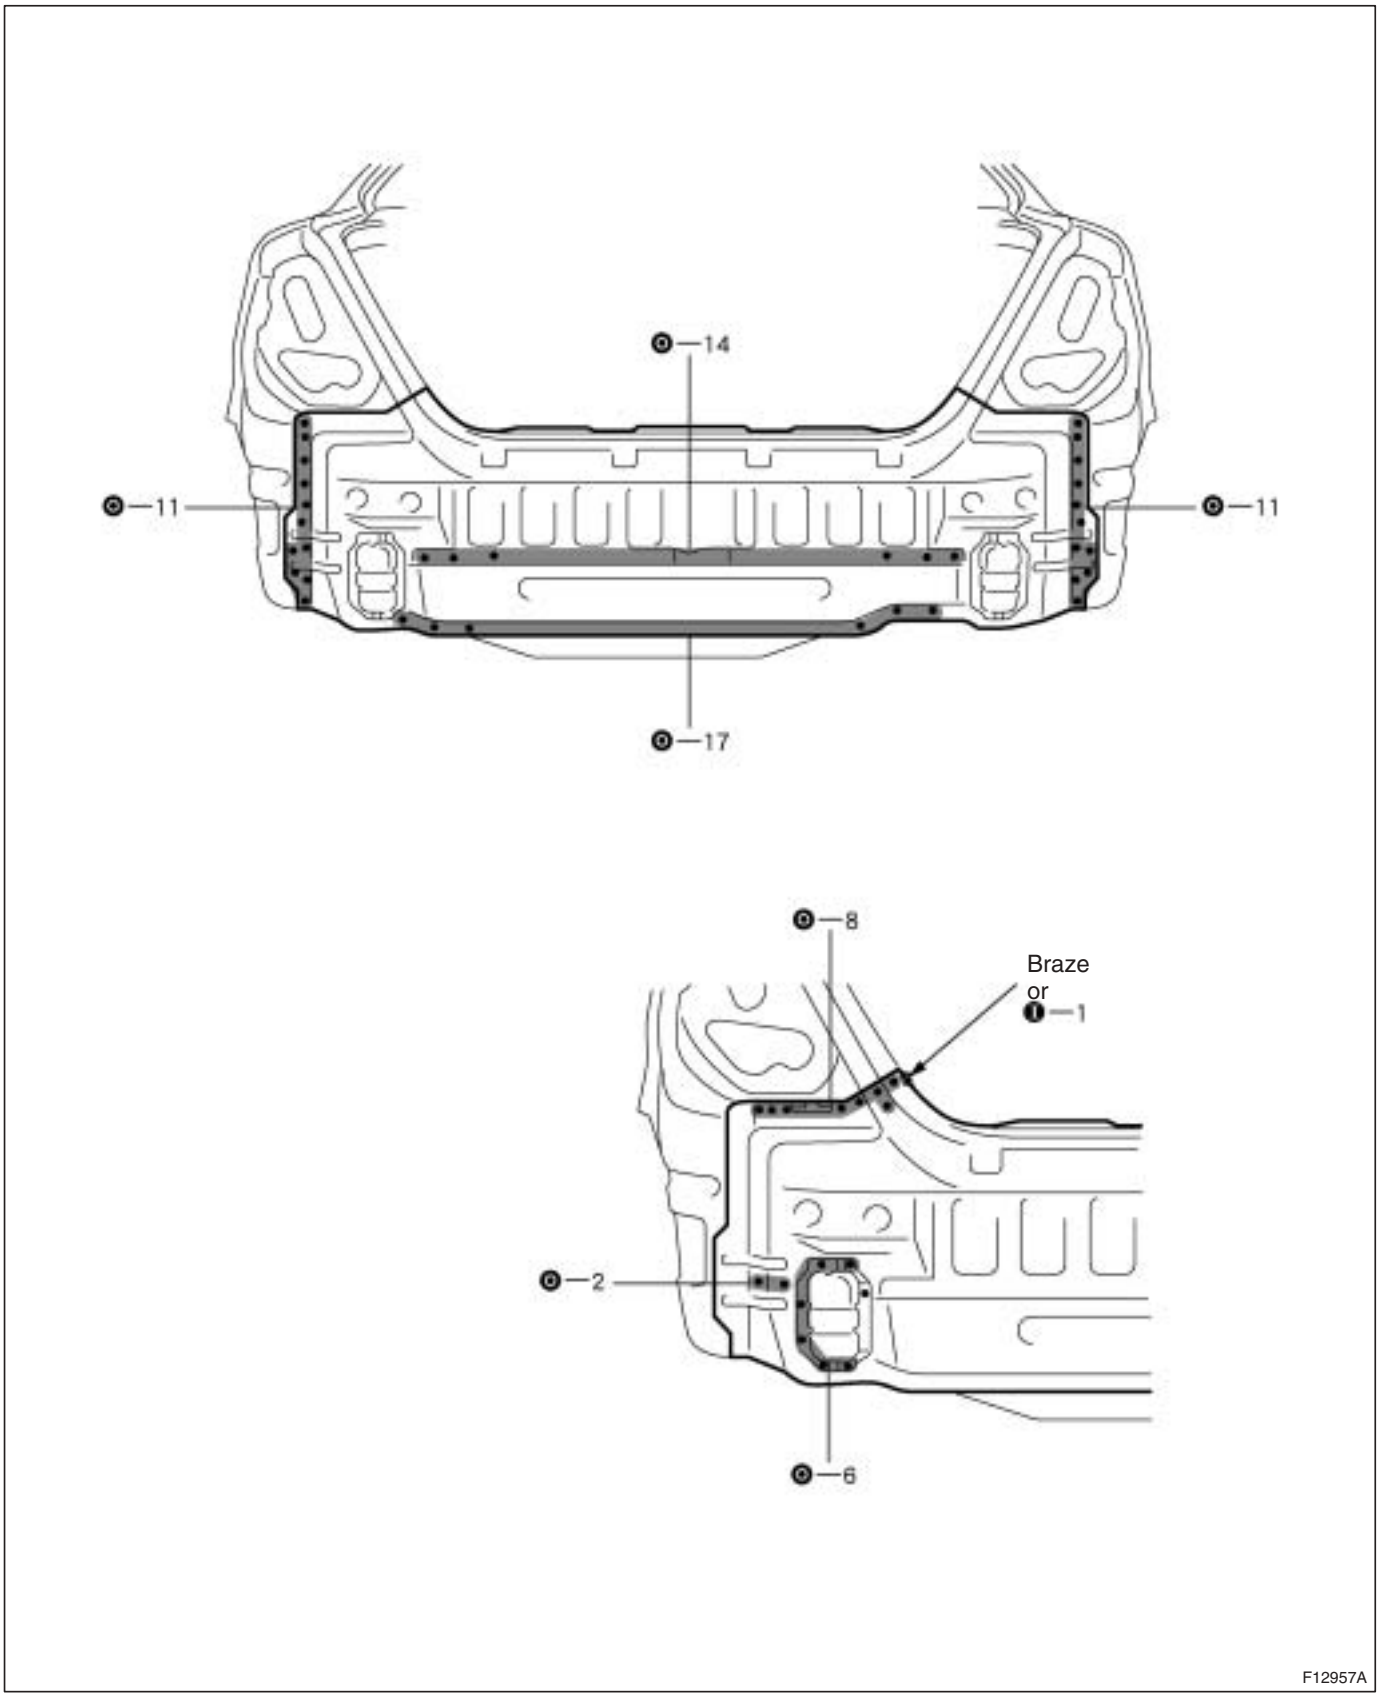

2. INSTALL BODY LOWER BACK PANEL

HINT:
Inspect the fitting of the luggage compartment door and rear combination light, etc., before welding, since this attacts the appearance of the finish.

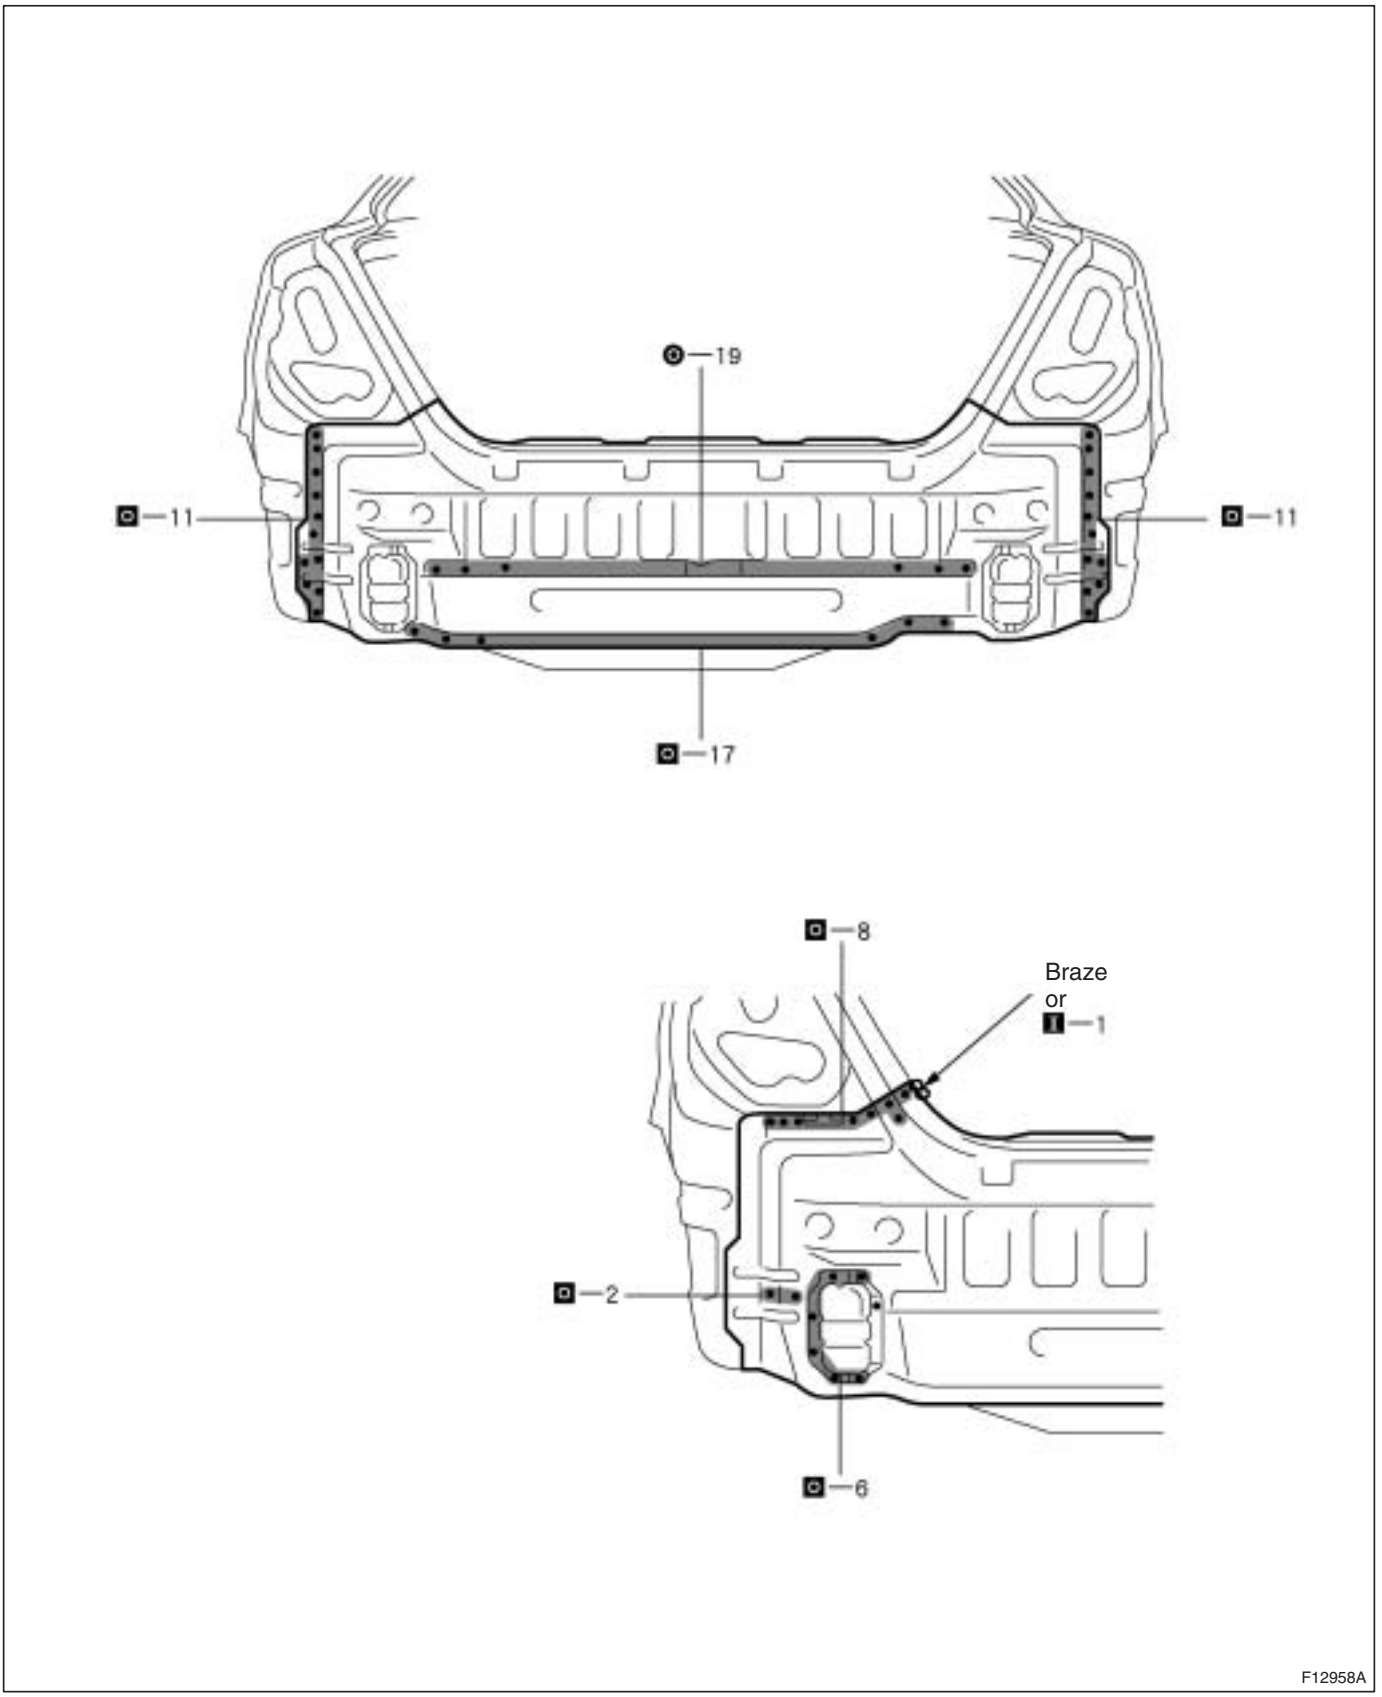

3. MEASURING THE OPENING PORTION DIMENSIONS (See page BP-100)

4. APPLYING SEALER TO THE REAR LUGGAE COMPARTMENT (See page PC-1)

5. APPLYING UNDER COATING (See page PC-6)

6. APPLYING ANTI-RUST AGENT

(a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.