
LUGGAGE COMPARTMENT OPENING TROUGH (ASSY)


REPLACEMENT

1. REMOVE LUGGAGE COMPARTMENT OPENING TROUGH

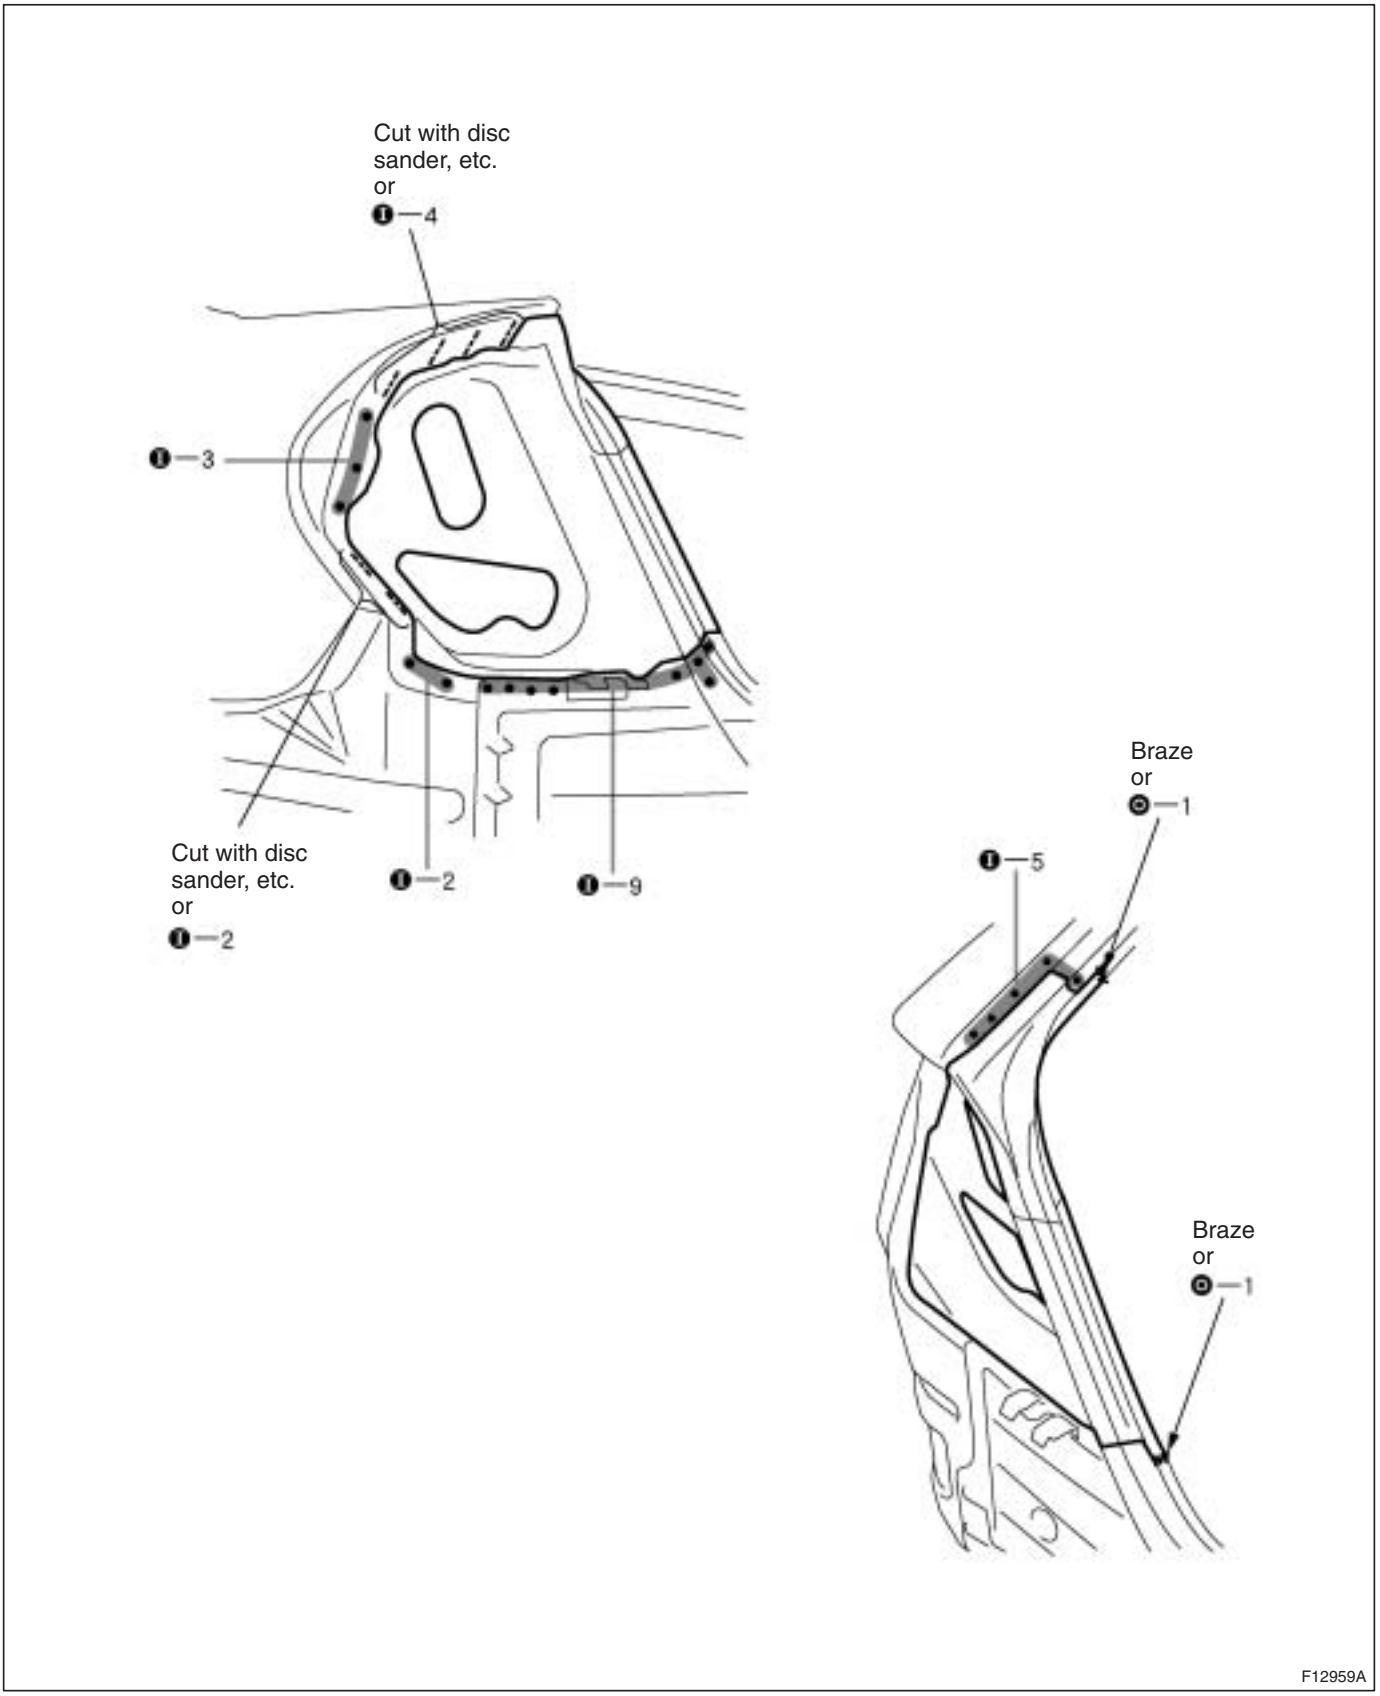

2. INSTALL LUGGAGE COMPARTMENT OPENING TROUGH

HINT:
Inspect the fitting of the luggage compartment door and rear combination light, etc, before welding, since this affects the appearance of the finish.

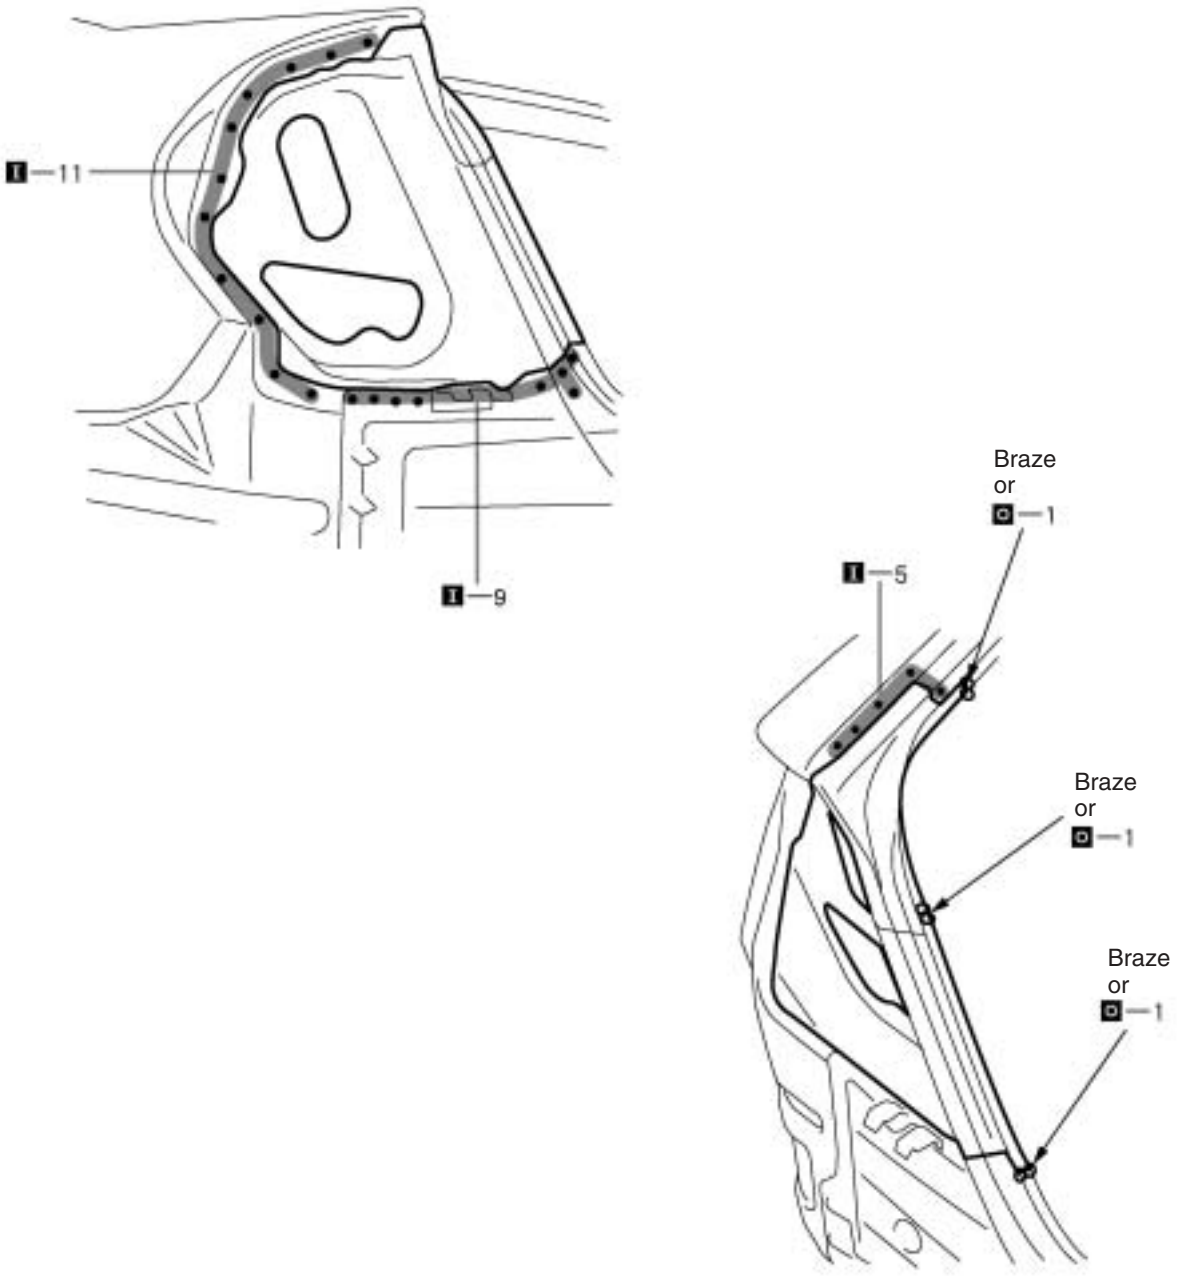

3. MEASURING THE OPENING PORTION DIMENSIONS (See page BP-100)

4. APPLYING SEALER TO THE REAR LUGGAGE COMPARTMENT (See page PC-1)

5. APPLYING ANTI-RUST AGENT

(a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.