

REAR FLOOR NO.2 CROSSMEMBER (ASSY)

REPLACEMENT


1. REMOVE REAR FLOOR NO.2 CROSSMEMBER

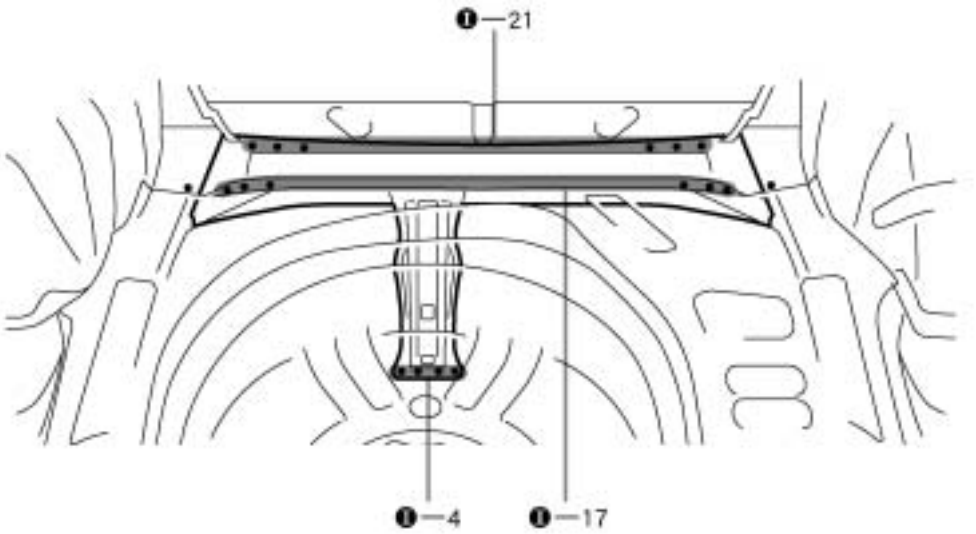


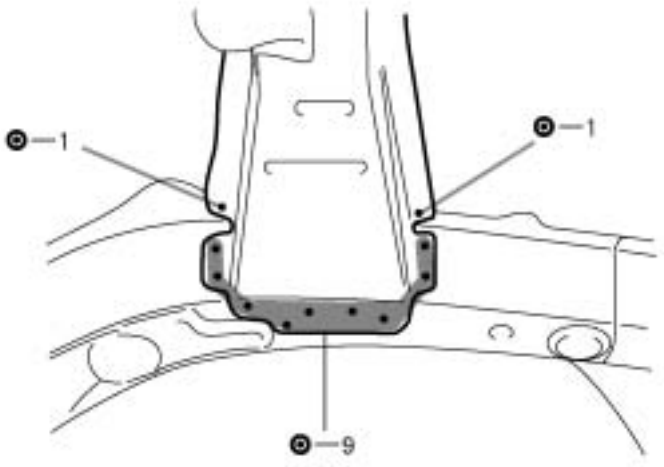

F12956A

2. INSTALL REAR FLOOR NO.2 CROSSMEMBER

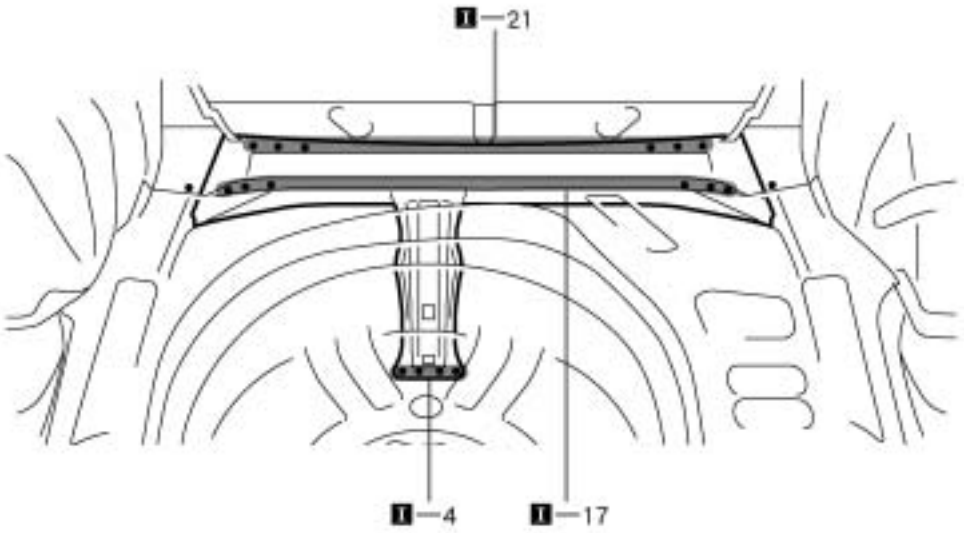

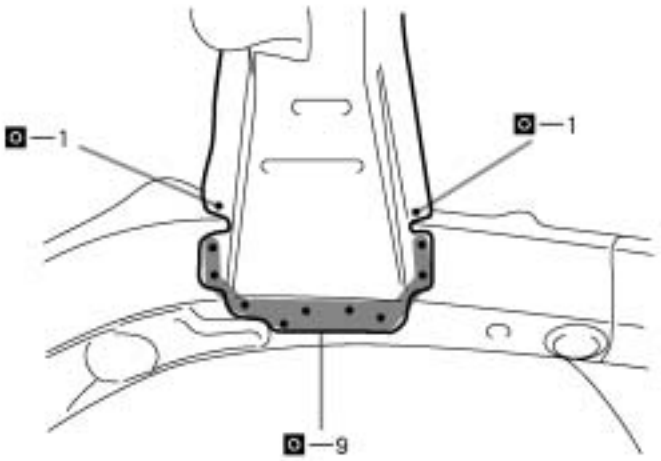

F12975A

3. **MEASURING THE UNDER BODY DIMENSIONS (See page BP-100)**
4. **APPLYING SEALER TO THE INSIDE OF THE VEHICLE (See page PC-1)**
5. **APPLYING SEALER TO THE REAR LUGGAGE COMPARTMENT (See page PC-1)**
6. **APPLYING UNDER COATING (See page PC-6)**
7. **INSTALL SILENCER SHEET (See page PC-11)**
8. **APPLYING ANTI-RUST AGENT**

(a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structoral weld spots.