CRUISE CONTROL MAIN SWITCH ASSY


REPLACEMENT

8205P–01

HINT:

Installation is in the reverse order of removal.


1. **DISCONNECT BATTERY NEGATIVE TERMINAL (SEE PAGE 60–1)**
2. **REMOVE STEERING WHEEL COVER LOWER NO.2**
3. **REMOVE STEERING WHEEL COVER LOWER NO.3**
4. **REMOVE HORN BUTTON ASSY (SEE PAGE 60–19)**

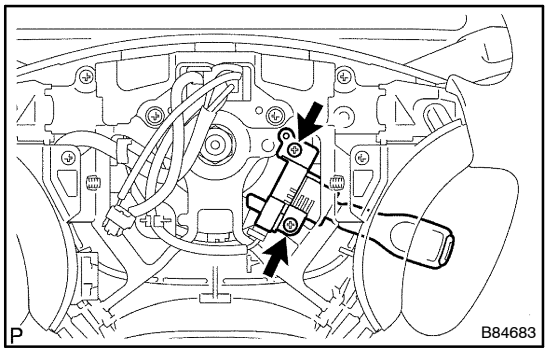

5. **REMOVE CRUISE CONTROL MAIN SWITCH ASSY**

(a) Disconnect the connector.

(b) Remove the 2 screws.

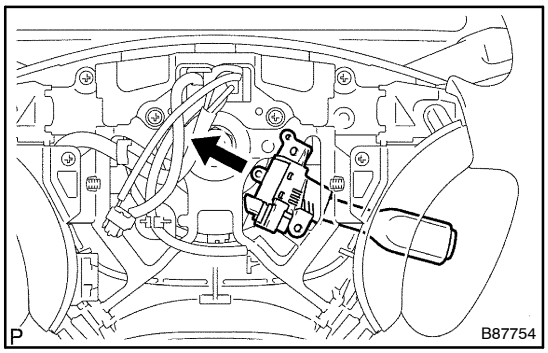

(c) Pull out the cruise control main switch assy in the direction shown by the arrow in the illustration.

6. **INSTALL HORN BUTTON ASSY (SEE PAGE 60–19)**
7. **INSPECT HORN BUTTON ASSY (SEE PAGE 60–13)**
8. **CONNECT BATTERY NEGATIVE TERMINAL**
9. **INSPECT SRS WARNING LIGHT (SEE PAGE 05–10)**