
27066–01

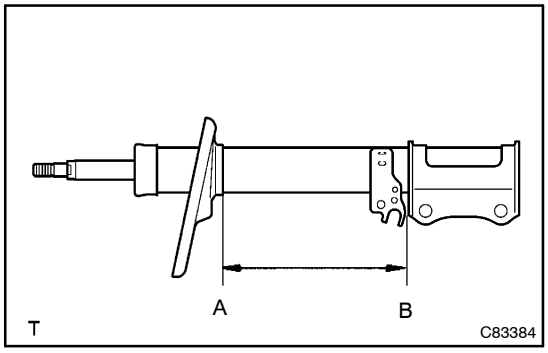

DISPOSAL

1. DISPOSE SHOCK ABSORBER ASSY REAR LH

(a) Fully extend the shock absorber rod.
(b) Using a drill, make a hole in the cylinder as shown in the illustration to discharge the gas inside.

CAUTION:

- **When drilling, chips may fly out, work carefully.**
- **The gas is colorless, odorless and non–poisonous.**