
# CENTER STOP LAMP ASSY

## REPLACEMENT


650CB–01

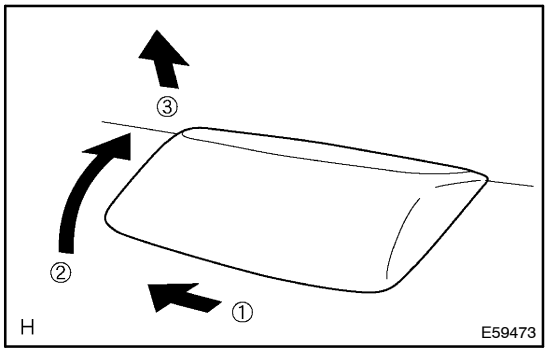


1. **REMOVE CENTER STOP LAMP ASSY(W/O REAR SPOILER LED)**

(a) Pull out the center stop light assy shown in the illustration.
(b) Disconnect the connector.

2. **REMOVE LUGGAGE COMPARTMENT DOOR COVER(W/ REAR SPOILER LED)**
**(See page 76–7)**
3. **REMOVE REAR SPOILER SUB–ASSY(W/ REAR SPOILER LED)**
**(See page 76–7)**

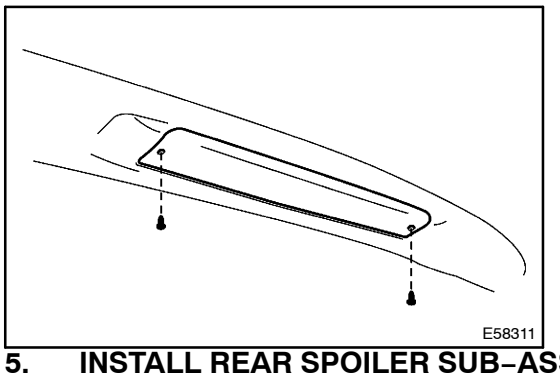


4. **REMOVE CENTER STOP LAMP ASSY(W/ REAR SPOILER LED)**

(a) Remove the 2 screws and center stop light assy.

5. **INSTALL REAR SPOILER SUB–ASSY(W/ REAR SPOILER LED)**
**(See page 76–7)**