FRONT NO.2 SPEAKER ASSY


6709F–01

REPLACEMENT

HINT:


COMPONENTS: See page 67–1

1. REMOVE INSTRUMENT PANEL SPEAKER PANEL SUB–ASSY NO.2
(See page 71–10)

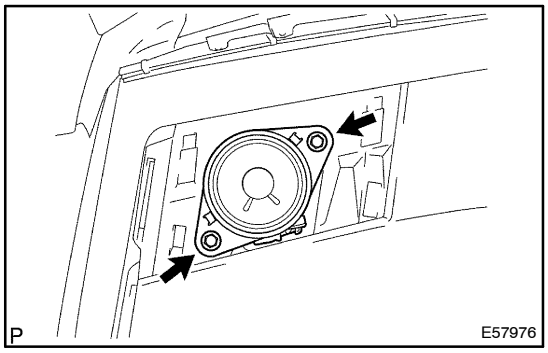

2. REMOVE FRONT NO.2 SPEAKER ASSY

(a) Remove the 2 bolts.
(b) Disconnect the connector and remove the front No.2 speaker assy.

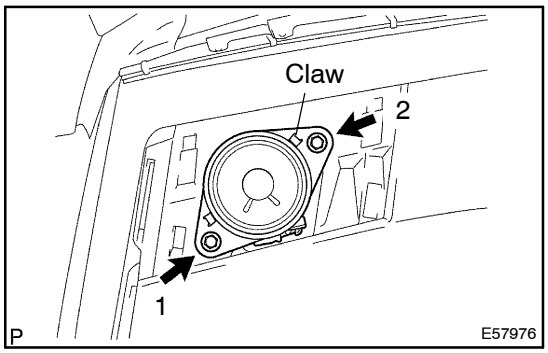

3. INSTALL FRONT NO.2 SPEAKER ASSY

(a) Connect the connector.
(b) Align a claw with the notch of the instrument panel safety pad with 2 bolts, and install the front No.2 speaker assy.

NOTICE:
Install them in the order shown in the illustration.